MILITARY STANDARD


MIL-STD-1320-272

(NAVY)

28 JUNE 1993

TRUCKLOADING

GUIDED MISSILE LAUNCHER (GML) FOR ROLLING AIRFRAME MISSILE SYSTEM (RAM) ON TRANSPORTATION SKID, DWG NO. 6660272

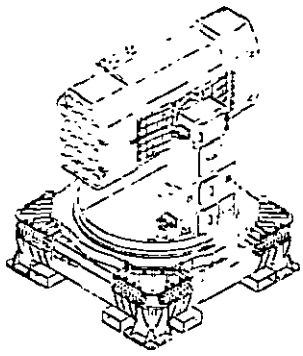


LAUNCHER DATA:

DIMENSIONS:

- LENGTH 101
- WIDTH 101
- HEIGHT 138.73

CUBE 807.17

WEIGHT ..... 9,001 LBS

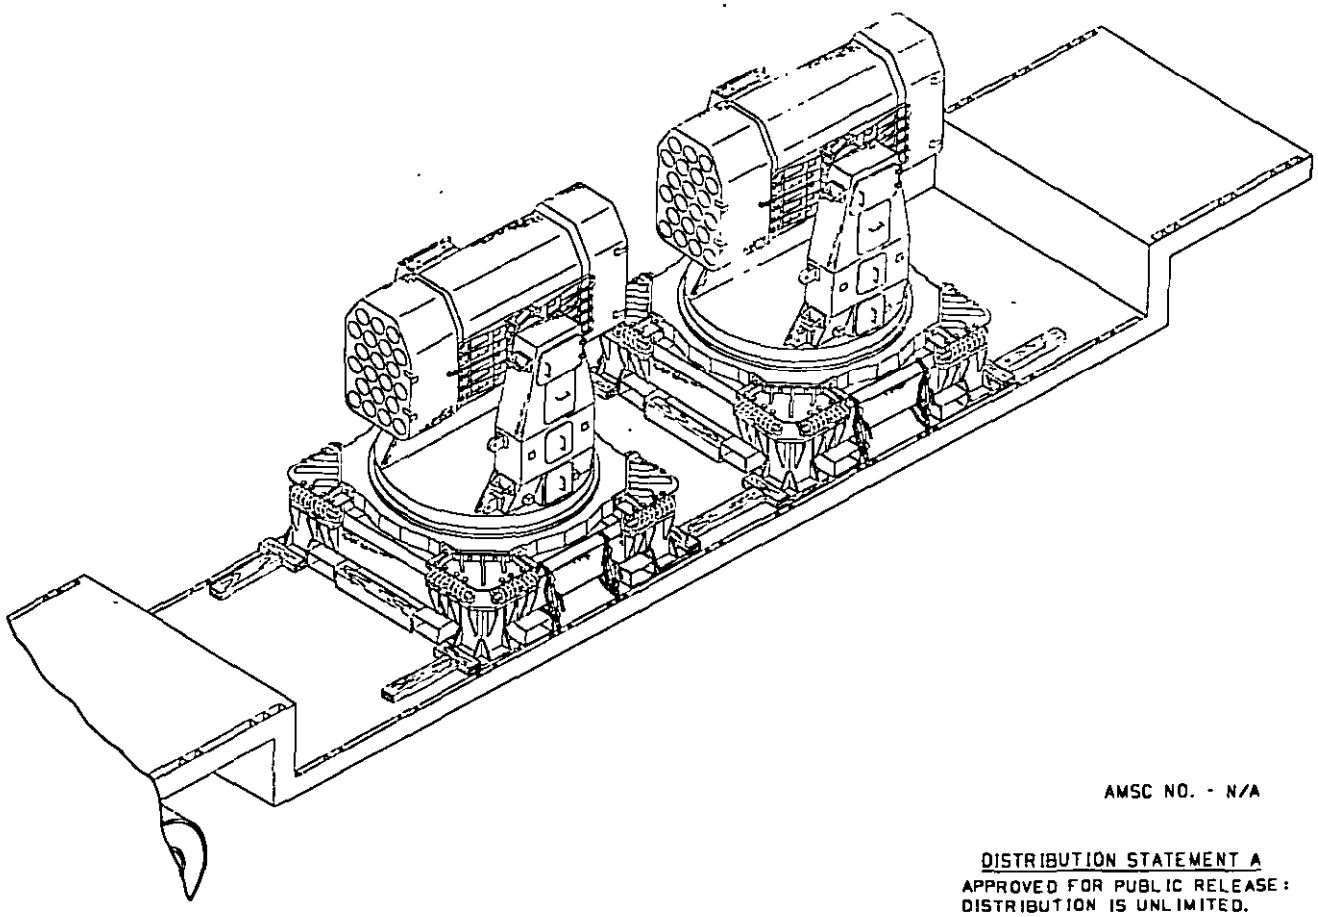

AMSC NO. - N/A

DISTRIBUTION STATEMENT A

APPROVED FOR PUBLIC RELEASE: DISTRIBUTION IS UNLIMITED.

NOTES:

1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

REV LTR	REVISION DESCRIPTION	DATE	TDA	SYSCOM
			APPROVAL	

FSC 8140

AUTHORIZED AND RELEASED FOR HIGHWAY SHIPMENT ONLY.

SIGNATURE — TDA, WPNSTA EARLE — 6-25-93 DATE

SIGNATURE — AIRSYSCOM BY DIRECTION — DATE

ORIGINATOR — 92/6/24 DATE

WPNSTA EARLE, NEW JERSEY


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:50Z
Check the source to verify that this is the current version before use.

GENERAL NOTES:

1. THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR TRUCKLOADING THE GUIDED MISSILE LAUNCHER (GML) FOR THE ROLLING AIRFRAME MISSILE SYSTEM (RAM) ON ITS TRANSPORTATION SKID.
2. THE PROCEDURES DESCRIBED HEREIN ARE INTENDED FOR 102"-WIDE "LOWBOY" FLATBED TRAILERS. THE TRAILER FLOOR SHALL BE LOW ENOUGH TO ENSURE THAT THE LOAD DOES NOT EXCEED MAXIMUM HEIGHT LIMITATIONS FOR THE INTENDED ROUTE. IF A LOW ENOUGH TRAILER IS NOT AVAILABLE, PROPER WAIVERS WILL HAVE TO BE OBTAINED. DO NOT USE TRAILERS WITH ALL METAL FLOORS.
3. CHAINS AND LOADBINDERS ONLY SHALL BE USED FOR TIEDOWNS. STEEL STRAPPING IS NOT PERMITTED. CHAINS, FITTINGS, AND LOAD BINDERS SHALL CONFORM TO THE REQUIREMENTS OF THE GENERAL TRUCKLOADING DOCUMENT MIL-STD-1320 (NAVY) AND BE APPLIED AS SHOWN IN SECTION B-B ON PAGE 4 OF THIS DOCUMENT.
4. FOUR TIEDOWNS SHALL BE USED FOR EACH LAUNCHER.
5. EVEN THOUGH THE ILLUSTRATION ON PAGE 3 OF THIS DOCUMENT SHOWS TWO LAUNCHERS LOADED ONTO THE TRAILER, A TRUCKLOAD MAY ALSO CONTAIN ONE OR THREE LAUNCHERS IF SPACE PERMITS. LAUNCHERS SHALL BE CENTRALLY LOCATED ON THE TRAILER.
6. PRIOR TO LOADING, THE TRAILER SHALL BE INSPECTED AND THE INSPECTION REPORTED ON DD FORM 626 AS REQUIRED BY NAVSEA SW020-AC-SAF 010/020.
7. UNLESS OTHERWISE SPECIFIED, DUNNAGE LUMBER AND NAILS SHALL BE AS SPECIFIED IN THE GENERAL TRUCKLOADING DOCUMENT MIL-STD-1320 (NAVY).
8. THE MAXIMUM GROSS WEIGHT OF THE TRACTOR-TRAILER AND THE ALLOWABLE AXLE WEIGHTS ARE THE RESPONSIBILITY OF THE CARRIER. THE CARRIER WILL ADVISE THE SHIPPER OF THESE LIMITATIONS, AND THE SHIPPER SHALL LOAD THE TRAILER IN SUCH A MANNER THAT THE TRACTOR-TRAILER WILL NOT EXCEED THESE LIMITATIONS.
9. AFTER THE BLOCKING, BRACING, AND TIEDOWNS HAVE BEEN INSPECTED, THE LAUNCHERS SHALL BE COMPLETELY COVERED WITH FIRE RESISTANT, WATERPROOF TARPAULINS.
10. FOR GENERAL TRUCKLOADING PROCEDURES REFER TO THE GENERAL TRUCKLOADING DOCUMENT MIL-STD-1320 (NAVY).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:50Z
Check the source to verify that this is the current version before use.


FTL FLATBED ("LOWBOY")
102" - WIDE

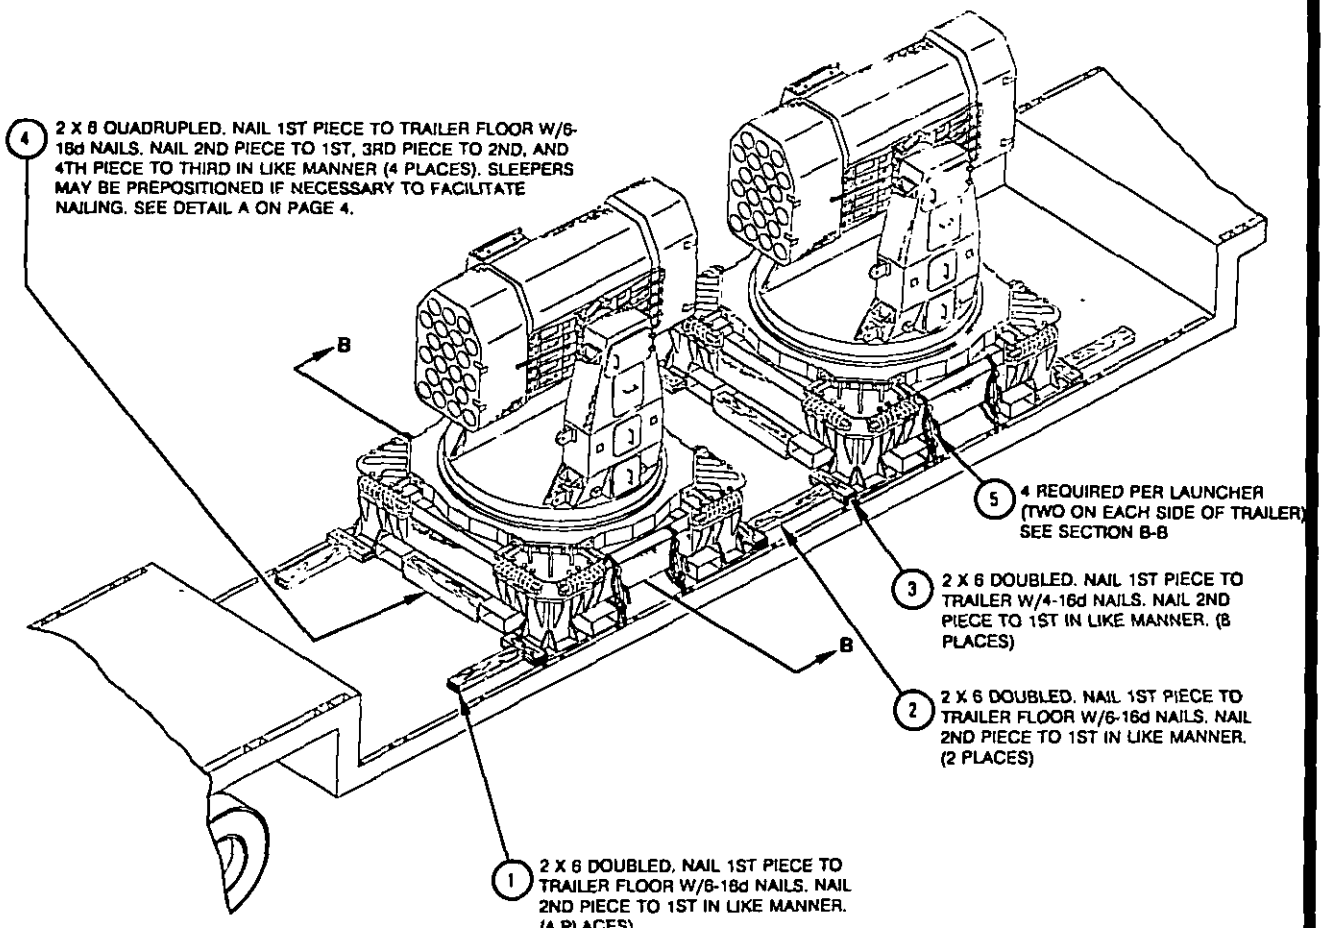


ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
5	CHAIN & LOADBINDER	STEEL	
4	SLEEPER	WOOD	2 X 6 X 36
3	CROSSMEMBER	WOOD	2 X 6 X 17
2	BACKUP CLEAT, CENTER	WOOD	2 X 6 X 36 MIN
1	BACKUP CLEAT, END	WOOD	2 X 6 X 24

LIST OF MATERIALS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:50Z
Check the source to verify that this is the current version before use.

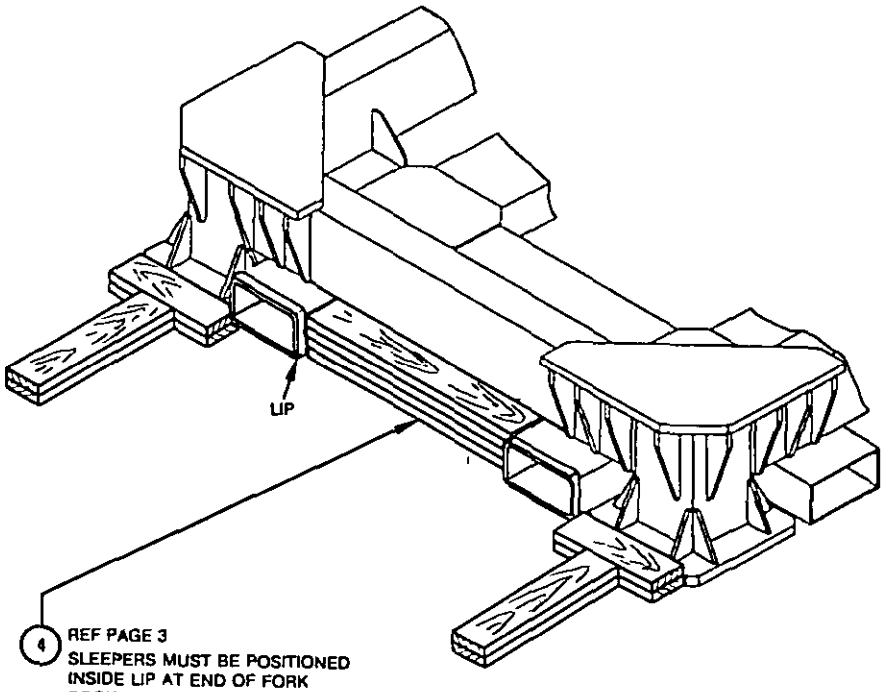

DETAIL A

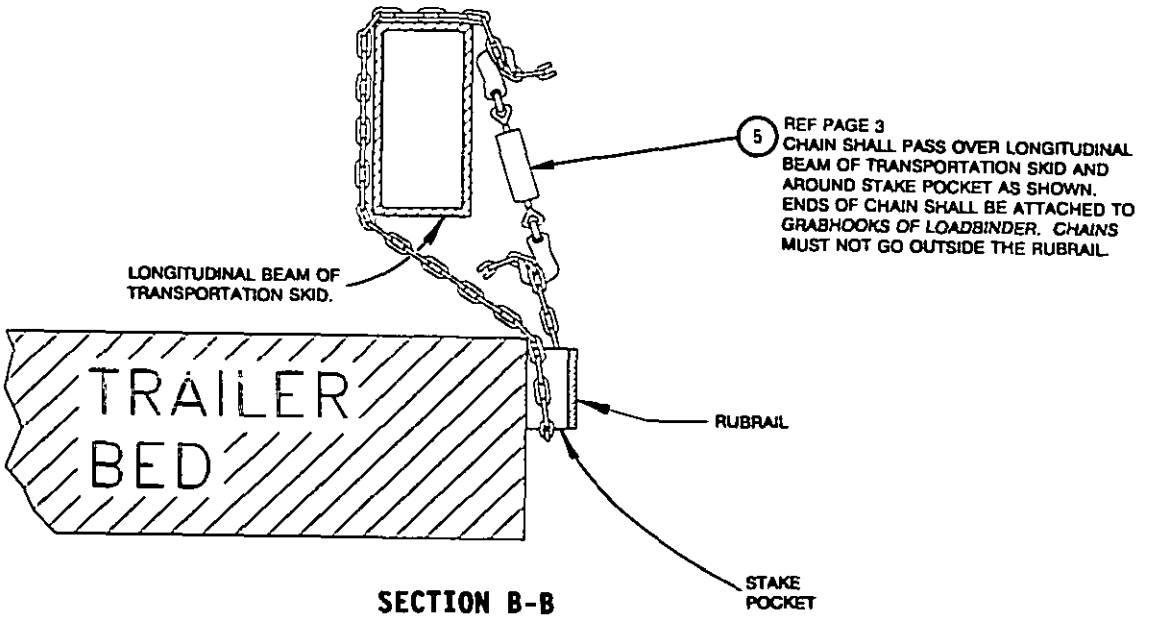

SECTION B-B

SHOWING ROUTE FOR TIEDOWN CHAINS. DETAIL OF LAUNCHER AND NON-RELEVANT PORTIONS OF TRANSPORTATION SKID OMITTED FOR CLARITY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:50Z
Check the source to verify that this is the current version before use.

PREPARING ACTIVITY:
NAVY - OS
(PROJECT NO. 8140-0088)