MILITARY STANDARD

MIL-STD-1320-280

(NAVY)

8 OCTOBER 1993

TRUCKLOADING


ALPHA CONFIGURED MINE, MK 56 MOD 0 (WITH FAIRING MK 21 MOD 0 AND PARACHUTE PACK WITH FINS) IN MINE CRATE MK 56 MOD 0


CRATED MINE DATA

LENGTH	138-1/8
WIDTH	27
HEIGHT	29-1/2
GROSS WEIGHT (APPROX.)	2,290 LBS ♦
CUBE	62.7 CUFT


♦ DO NOT USE FOR SHIPPING WEIGHT.

FOR HAZARD CLASSIFICATION SEE SW020-AC-SAF-010/020/030.

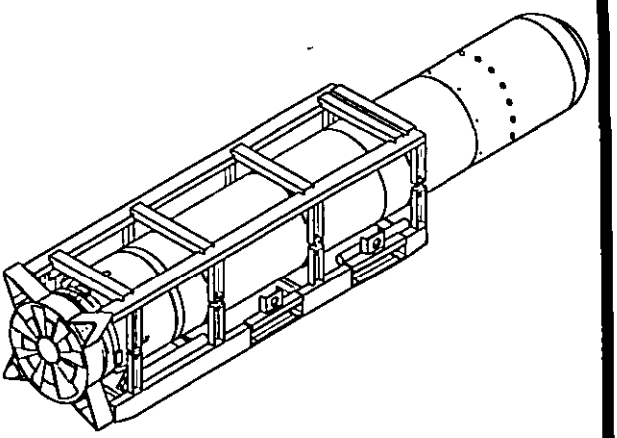

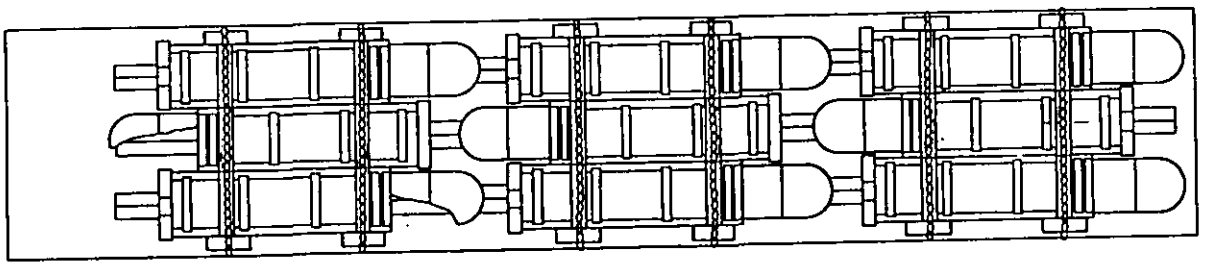

TOP VIEW

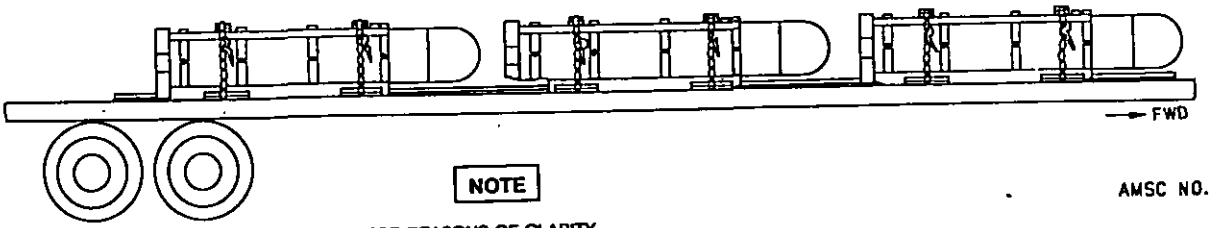

SIDE VIEW

NOTE

FOR REASONS OF CLARITY, NOSE ENDS OF MINES IN CENTER OF TRAILER ARE NOT SHOWN IN SIDE VIEW.

AMSC NO. - N/A

DISTRIBUTION STATEMENT A

APPROVED FOR PUBLIC RELEASE: DISTRIBUTION IS UNLIMITED.

NOTES:

1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

REV LTR	REVISION DESCRIPTION	DATE	TDA	SYSCOM
			APPROVAL	

FSC 8140

AUTHORIZED AND RELEASED FOR HIGHWAY SHIPMENT ONLY.

SIGNATURE TDA, WPNSTA EARLE DATE 10/8/93

SIGNATURE NAVSEASYSCOM BY DIRECTION DATE 10/8/93

ORIGINATOR DATE 93/10/5

WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2025-10-23 12:15:50
Check the source to verify that this is the current version before use.

GENERAL NOTES:


1. THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR TRUCKLOADING THE MK 56 MOD 0 ALPHA CONFIGURED MINE IN THE MK 56 MOD 0 MINE CRATE..
2. THE PROCEDURES DESCRIBED HEREIN ARE INTENDED FOR FLATBED TRAILERS OR TRUCKS. DO NOT USE TRAILERS OR TRUCKS WITH ALL METAL FLOORS.
3. CHAINS AND STEEL STRAPPING MAY BE USED INTERCHANGEABLY ON A ONE-TO-ONE BASIS FOR TIEDOWNS.
4. STEEL STRAPPING USED AS TIEDOWNS SHALL BE 2 X .050 AND SHALL CONFORM TO AND BE APPLIED AS SPECIFIED IN THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY).
5. CHAINS, FITTINGS, AND LOAD BINDERS SHALL CONFORM TO AND BE APPLIED AS SPECIFIED IN THE GENERAL TRUCK-LOADING DOCUMENT, MIL-STD-1320 (NAVY), EXCEPT THAT THE CHAIN/GRAB HOOKS SHALL BE ATTACHED TO THE STAKE POCKETS (NOT AROUND THE RUB RAIL).
6. PROTECTOR BOARDS (DOUBLED 2 X 6'S) SHALL BE USED UNDER THE TIEDOWNS. STEEL STRAPS SHALL BE SECURED TO THE PROTECTOR BOARDS USING 2-INCH STRAPPING STAPLES. WHEN USING CHAIN, THE CHAINS SHALL BE SECURED TO THE PROTECTOR BOARD BY DRIVING A 10d NAIL THROUGH THE CHAIN LINK AND CLINCHING THE NAIL OVER THE CHAIN. FIVE STAPLES/NAILS SHALL BE USED FOR EACH TIEDOWN.
7. THE MAXIMUM NUMBER OF MINES THAT CAN BE LOADED ONTO A TRAILER IS AS FOLLOWS.


42 FT AND LONGER TRAILERS	9 UNIT LOADS
29 THRU 41 FT TRAILERS	6 UNIT LOADS
16 THRU 28 FT TRAILERS	3 UNIT LOADS

8. *PRIOR TO LOADING THE TRAILER AND DURING PRELOADING INSPECTION REQUIRED BY NAVSEA OP 2165 AND REPORTED* ON DD FORM 626, THE CHAINS, FITTINGS, AND LOAD BINDERS SHALL BE INSPECTED FOR STRETCH, GOUGING, BENT LINKS, WEAR, AND ANY OTHER NOTICEABLE DEFECTS. THE INSPECTOR SHALL CONFIRM THAT THE CHAINS, FITTINGS, AND LOAD BINDERS HAVE BEEN INSPECTED AND SHALL SO NOTE IN ITEM NO. 22 OF DD FORM 626. ANY DEFICIENCY SHALL BE CAUSE FOR REJECTION OF A CHAIN OR LOAD BINDER.
9. UNLESS OTHERWISE SPECIFIED, DUNNAGE LUMBER, STEEL STRAPPING, STRAP SEALS, AND NAILS SHALL BE AS SPECIFIED IN THE GENERAL TRUCKLOADING DOCUMENT MIL-STD-1320 (NAVY).
10. THE MAXIMUM GROSS WEIGHT OF THE TRACTOR-TRAILER AND THE ALLOWABLE AXLE WEIGHTS ARE THE RESPONSIBILITY OF THE CARRIER. THE CARRIER WILL ADVISE THE SHIPPER OF THESE LIMITATIONS, AND THE SHIPPER SHALL LOAD THE TRAILER IN SUCH A MANNER THAT THE TRACTOR-TRAILER WILL NOT EXCEED THESE LIMITATIONS.
11. AFTER THE BLOCKING, BRACING, AND TIEDOWNS HAVE BEEN INSPECTED, THE LOAD SHALL BE COMPLETELY COVERED WITH FIRE RESISTANT, WATERPROOF TARPAULINS.
12. AFTER THE TARPAULINS ARE IN PLACE, ATTACH THE PROPER EXPLOSIVES PLACARDS TO BOTH SIDES, FRONT, AND BACK OF THE TRAILER, AND ATTACH THE SHIPPING DOCUMENTS TO AN ACCESSIBLE AREA ON THE BACK DECK OF THE TRAILER.
13. FOR GENERAL TRUCKLOADING PROCEDURES REFER TO THE GENERAL TRUCKLOADING DOCUMENT MIL-STD-1320 (NAVY).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:50Z
Check the source to verify that this is the current version before use.

FTL 42 FT AND LONGER TRAILERS (FLATBED)

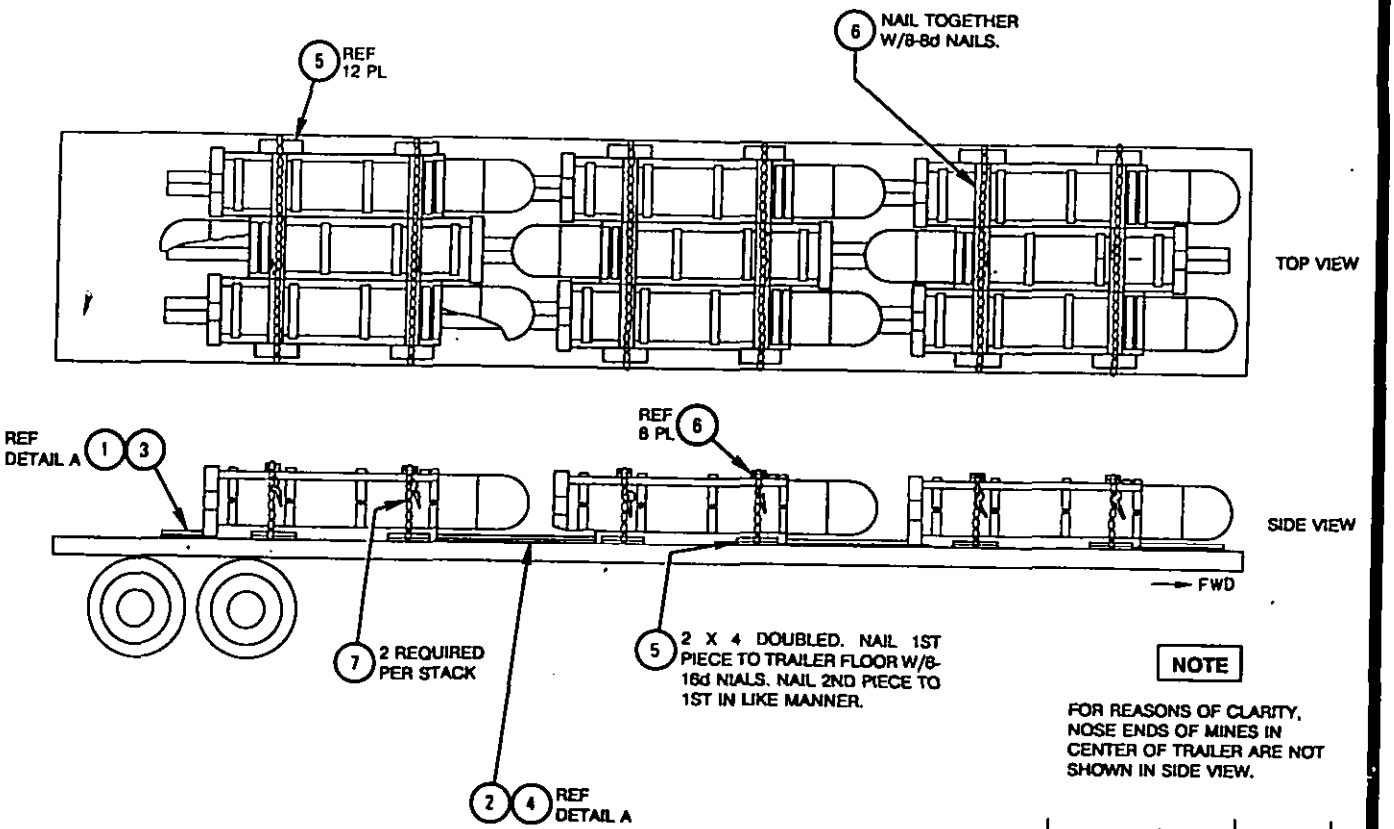

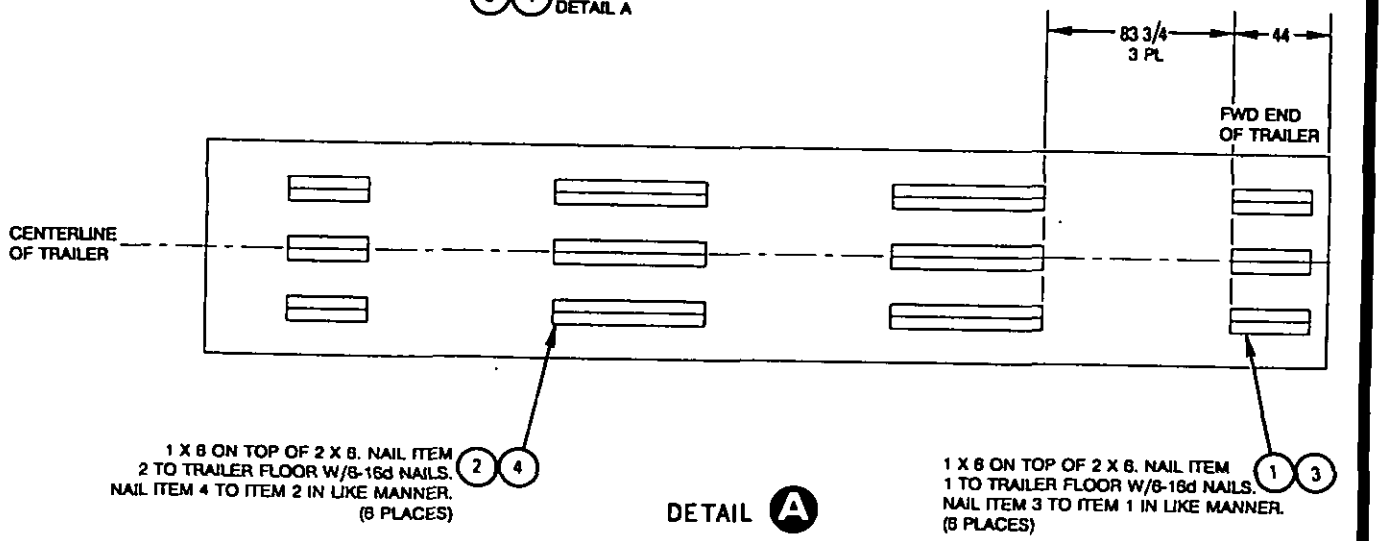

DETAIL A

PREPOSITION BLOCKING FOR 42 FT AND LONGER TRAILERS

ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
7	CHAIN & LOADBINDER	STEEL	
6	PROTECTOR BOARD	WOOD	2 X 6 X 81
5	SLEEPER	WOOD	2 X 4 X 24
4	CLEAT	WOOD	1 X 6 X 68
3	CLEAT	WOOD	1 X 6 X 36
2	CLEAT	WOOD	2 X 6 X 68
1	CLEAT	WOOD	2 X 6 X 36


LIST OF MATERIALS

Source: https://assist.dla.mil -- Downloaded: 2020-10-23T23:50Z
Check the source to verify that this is the current version before use.

BLOCKING AND BRACING FOR ONE AND TWO-WIDE STACKS

NOTE


IN TWO-WIDE STACKS, THE TWO MINES SHALL BE ORIENTED WITH THEIR NOSES FACING OPPOSITE DIRECTIONS.

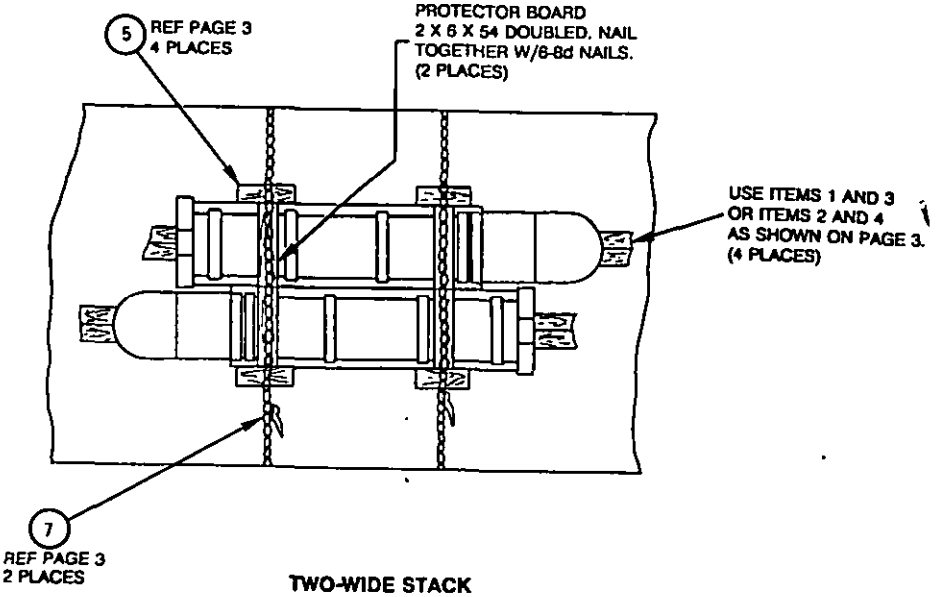

TWO-WIDE STACK

NOTE

IN ONE-WIDE STACKS, MINE MAY BE ORIENTED WITH NOSE FACING EITHER FORWARD OR AFT.

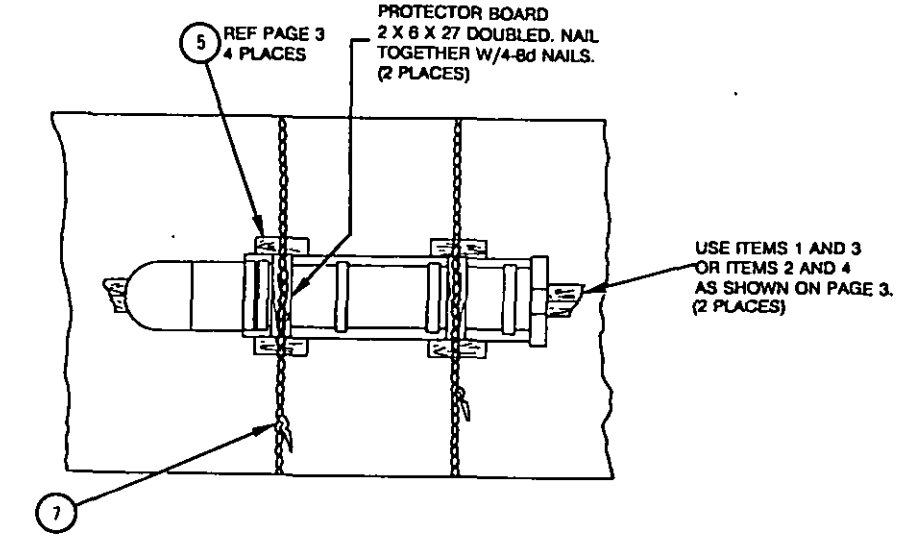

ONE-WIDE STACK

PREPARING ACTIVITY:
NAVY-OS
(PROJECT NO. 8140-0095)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:50Z
Check the source to verify that this is the current version before use.