MILITARY STANDARD

MIL-STD-1322-91
(NAVY)
11 JANUARY 1988

UNIT LOAD
FOR DOMESTIC AND OVERSEAS SHIPMENT


DOLLY, MISSILE TRANSFER, MK 30 MOD 0
ON SKID, TRANSPORT, DL6212586

UNIT LOAD DATA

WEIGHT OF DOLLY	2100	LBS
WEIGHT OF TWO SKIDS	160	LBS
WEIGHT OF STEEL STRAPPING	4	LBS
GROSS WEIGHT OF UNIT LOAD	2264	LBS △
CUBE	384.6	CU FT

△ DO NOT USE FOR SHIPPING WEIGHT

UNIT LOAD DIMENSIONS - 229L X 47W X 61 3/4H

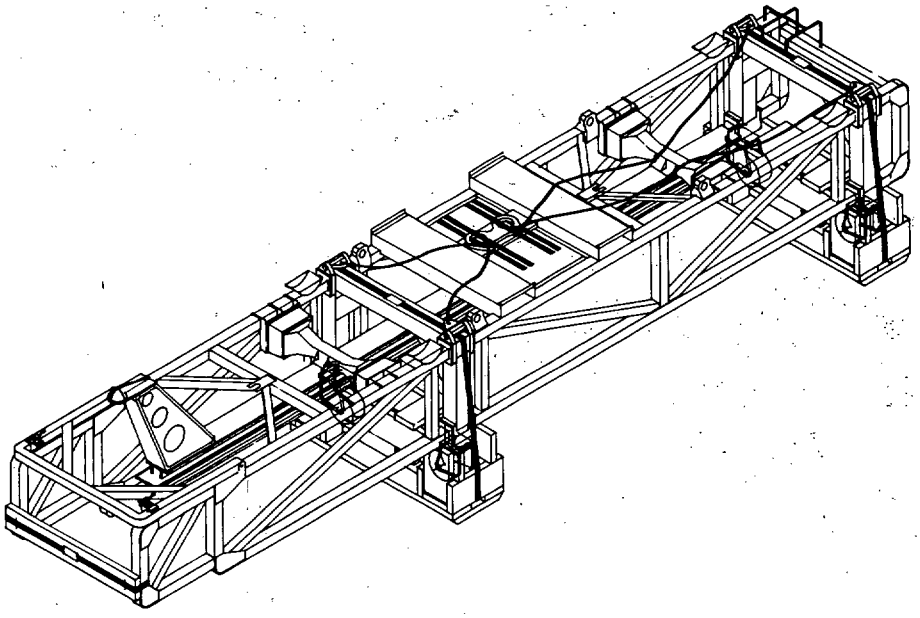

AMSC NO. - N/A

NOTES:

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED TRUCKLOADING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

DISTRIBUTION STATEMENT A
APPROVED FOR PUBLIC RELEASE: DISTRIBUTION IS UNLIMITED.

FSC 8140

THIS UNIT LOAD IS AUTHORIZED AND RELEASED FOR DEPOT HANDLING AND STORAGE AND IS MANDATORY FOR ALL OFF STATION SHIPMENTS.

REQUIREMENTS FOR CONSTRUCTION OF THIS UNIT LOAD SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF MIL-STD-1322 (NAVY).

C. Lincoln 1/5/88
SIGNATURE TECHNICAL DIRECTION AGENT (TDA) DATE

JE Kelly 1/4/88
SIGNATURE SEASYSCOM BY DIRECTION DATE

ORIGINATOR Alt Richards 1/5/88
DATE

NAVAL WEAPONS HANDLING CENTER
WPNSTA EARLE, NEW JERSEY


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:53Z
Check the source to verify that this is the current version before use.

UNITIZING PROCEDURE

(A) TAPE THE SLING LIFTING EYE TO THE ANTI-CHAFING BOARD, ITEM 6, WITH TAPE, ITEM 8, AND TAPE TO THE DOLLY BETWEEN THE FORK POCKETS WITH TAPE, ITEM 8, AS SHOWN.
(B) WRAP THE SLING CABLES WITH TAPE, ITEM 9, WHEREVER THEY CONTACT PAINTED SURFACES OF THE DOLLY.
(C) POSITION THE FORWARD GATES AND GUARD AS SHOWN AND SECURE THE GATE LOCKS.
(D) POSITION STRAPPING, ITEM 3, AROUND THE VERTICAL MEMBERS OF THE FORWARD GATES AND CENTER THE PROTECTOR BOARD, ITEM 7, UNDER THE STRAPING. TENSION AND DOUBLE NOTCH THE SEAL, ITEM 4.
(E) SECURE STRAPPING TO THE PROTECTOR BOARD WITH STAPLES, ITEM 5.
(F) POSITION AND LOCK THE DOLLY WHEELS INWARD AS SHOWN.
(G) POSITION THE DOLLY ON THE THE TWO SKIDS, ITEM 1, AS SHOWN.
(H) THREAD STRAPPING, ITEM 2, UNDER THE SKID STRINGERS AND OVER THE DOLLY CROSS FRAME. TENSION AND DOUBLE NOTCH THE SEAL, ITEM 4. NOTE: THE STRAPS PASS UNDER THE SLING LEG SWIVELS WHICH MUST BE TILTED UP SLIGHTLY TO PERMIT THE STRAPS TO PASS UNDER THE SHACKLE BOLTS.

MARKING:

IN ADDITION TO ANY SPECIAL MARKING REQUIRED BY CONTRACT OR ORDER, THE UNIT LOAD SHALL BE MARKED IN ACCORDANCE WITH MIL-STD-1322 (NAVY).

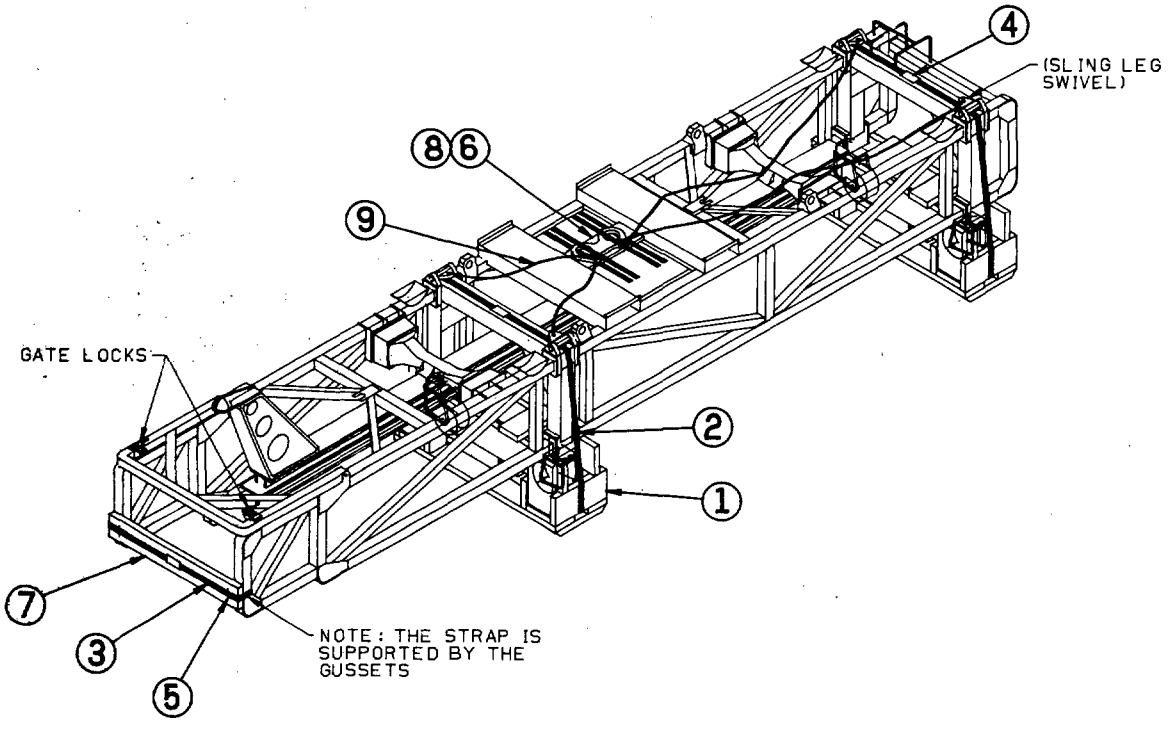

NOTES:
1. ALL MATERIALS SHALL BE IN ACCORDANCE WITH THE BASIC DOCUMENT, MIL-STD-1322 (NAVY).
2. DO NOT USE TYPE I STRAPPING WITH POWER MACHINES.

DEUNITIZING PROCEDURE

(A) CUT AND REMOVE STRAPPING, ITEM 2. NOTE: THE STRAPS MUST BE CUT ON BOTH SIDES OF THE SEAL.
(B) LIFT THE DOLLY OFF THE SKIDS.
(C) PLACE ANTI-CHAFING BOARD, ITEM 6, ON ONE OF THE SKIDS AND TAPE IN PLACE WITH ITEM 8.
(D) CUT AND REMOVE STRAPPING, ITEM 3.
(E) REMOVE THE PROTECTOR BOARD, ITEM 7.
(F) PLACE SKIDS IN STORAGE FOR FUTURE USE.

LIST OF MATERIALS

REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
AS REQ'D	9	TAPE, INSULATING	HH-I-510	(FRICTION TAPE)
AS REQ'D	8	TAPE	PPP-T-97, TYPE IV	1 WIDE
1	7	BOARD, PROTECTOR	SEE NOTE 1	2 X 6 X 37 1/2
1	6	BOARD, ANTI-CHAFING	SEE NOTE 1	1 X 8 X 18 1/2
2	5	STAPLE	SEE NOTE 1	1 1/4
3	4	SEAL	SEE NOTE 1	1 1/4
1	3	STEEL STRAPPING	SEE NOTES 1 & 2	1 1/4 X .035 X 8 FT
2	2	STEEL STRAPPING	SEE NOTES 1 & 2	1 1/4 X .035 X 15 FT
2	1	SKID, TRANSPORT	6212586	15 X 47 1/2 X 19

REVIEW ACTIVITY:
NAVY-OS

PREPARING ACTIVITY:
NAVY-OS
(PROJECT NO. 8140-N737)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:53Z
Check the source to verify that this is the current version before use.