MILITARY STANDARD

MIL-STD-1323-201 (NAVY)

2 NOVEMBER 1979

UNIT LOAD FOR UNDERWAY REPLENISHMENT

CARTRIDGE, 5.125 INCH, MK 186 (TORCH) IN PALLET ADAPTER, MK 144

UNIT LOAD DATA

DODIC/NALC NO.	EW75
NUMBER OF CARTRIDGES PER CONTAINER	1
NUMBER OF CONTAINERS PER ADAPTER UNIT	12
NUMBER OF ADAPTER UNITS PER UNIT LOAD	2
NUMBER OF CARTRIDGES PER UNIT LOAD	24
GROSS WEIGHT OF ONE CONTAINER (APPROX)	58 LBS
GROSS WEIGHT OF ONE ADAPTER UNIT (APPROX)	758 LBS
WEIGHT OF ADAPTERS (APPROX) 2 @ 58 LBS	116 LBS
WEIGHT OF STEEL STRAPPING (APPROX)	12 LBS
WEIGHT OF PALLET (APPROX)	94 LBS
GROSS WEIGHT OF UNIT LOAD (APPROX)	1614 LBS △
CUBE	42.1 CU. FT.
HAZARD CLASSIFICATION	
DOT	CLASS B
CG	CLASS II - G

△ DO NOT USE FOR SHIPPING PURPOSES

DO NOT STACK MORE THAN
5 UNIT LOADS HIGH IN STORAGE

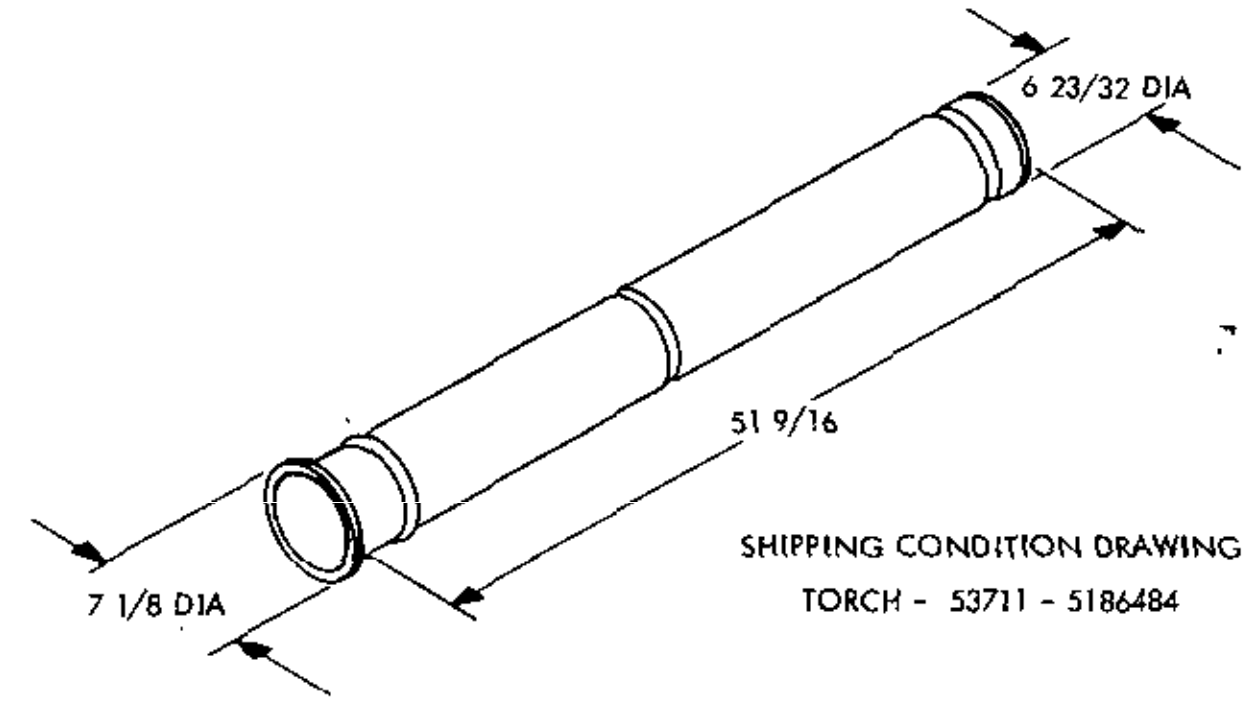

SHIPPING CONDITION DRAWING
TORCH - 53711 - 5186484

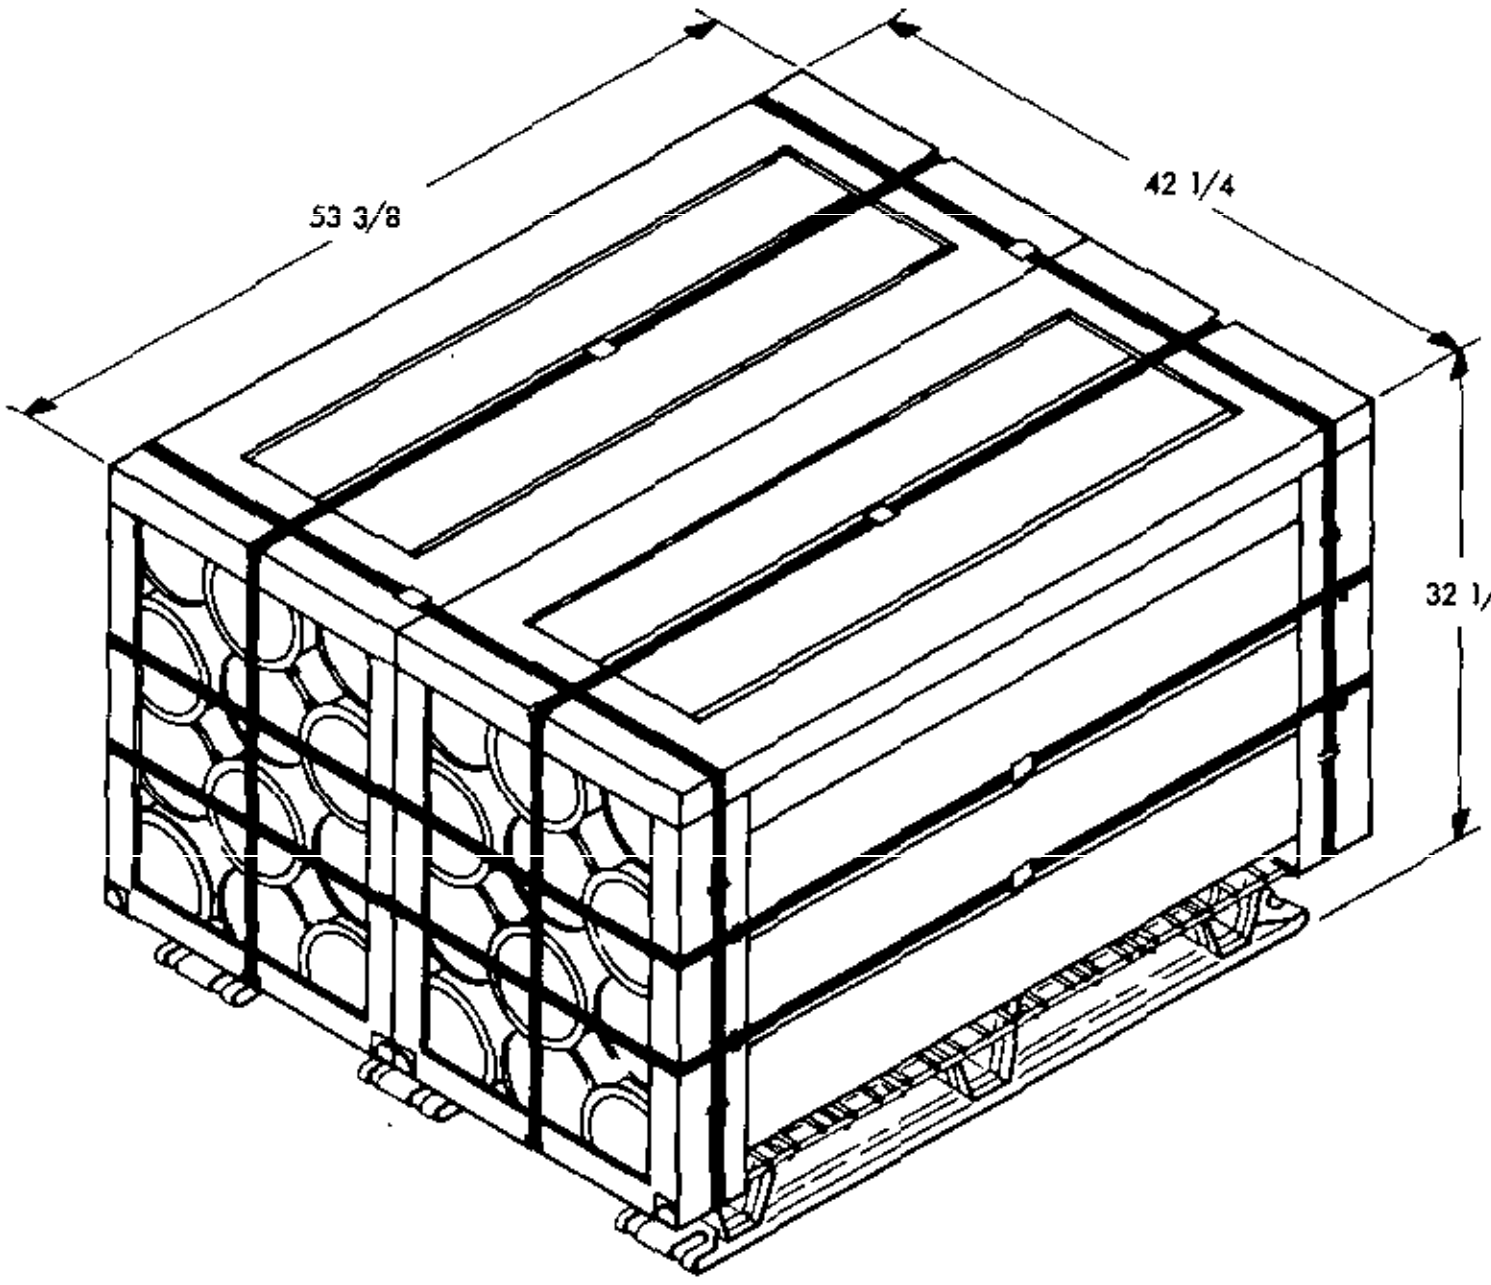

NOTES:

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED TRUCKLOADING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY)

FSC 8140

THIS UNIT LOAD IS AUTHORIZED AND RELEASED FOR SHIPPING, HANDLING STORAGE AND TRANSFER-AT-SEA. IT MAY ALSO BE USED FOR DOMESTIC SHIPMENT IN COMPLIANCE WITH DOT REGULATIONS.

M.S. Gray NWHC 11/1/79
SIGNATURE TECHNICAL DIRECTION AGENT (TDA) DATE

J. E. Kell 11/1/79
SIGNATURE SEASYSCOM BY DIRECTION DATE

REQUIREMENTS FOR CONSTRUCTION OF THIS UNIT LOAD SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF MIL-STD-1323 (NAVY)

ORIGINATOR S.R. Petrie 8025 10/31/79
DATE

NAVAL WEAPONS HANDLING CENTER
WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: [illegible]
Check the source to verify that this is the current version before use.

PALLETIZING PROCEDURE

(a) THREAD STRAPPING, ITEM 7, BETWEEN THE DECK WIRES OF THE PALLET, ITEM 1, AS SHOWN IN DETAIL A.

(b) THREAD STRAPPING, ITEM 8, THROUGH THE SQUARE OPENINGS IN THE PALLET DECK AS SHOWN IN DETAIL A.

(c) POSITION STRAPPING, ITEM 5, USED TO UNITIZE MODULE, ON PALLET ABOVE STRAPPING, ITEM 7, AS SHOWN IN DETAIL B.

(d) THREAD STRAPPING, ITEM 6, THROUGH THE STRAP LOOPS OF THE FRONT AND REAR FRAMES, ITEMS 2 AND 3, AND POSITION THE FRAMES ON THE PALLET AS SHOWN IN DETAIL B.

(e) POSITION TWO CONTAINERS IN THE CORNERS OF THE FRAMES WITH THEIR COVER ENDS AGAINST THE FLANGE OF THE FRONT FRAME, ITEM 2, AND THEIR BOTTOM ENDS ON THE SPACER BLOCKS OF THE REAR FRAME, ITEM 3, AS SHOWN IN DETAILS B AND C.

(f) POSITION A THIRD CONTAINER BETWEEN THE TWO CONTAINERS WITH THE COVER END AGAINST THE FLANGE OF THE REAR FRAME.

(g) POSITION THE REMAINING THREE ROWS OF CONTAINERS, ALTERNATING THE DIRECTION OF THE CONTAINERS BETWEEN ROWS, AS SHOWN IN DETAIL B.

(h) POSITION THE TOP FRAME, ITEM 4, OVER THE FRAMES AND CONTAINERS WITH THE TWO SPACER BLOCK END OVER THE FRONT FRAME.

(i) POSITION STRAPPING, ITEM 5, IN THE CORNER NOTCHES AND OVER THE TOP FRAME. TENSION AND DOUBLE NOTCH THE SEAL, ITEM 9.

(j) THREAD STRAPPING, ITEM 6, THROUGH THE OUTBOARD STRAP LOOPS OF THE FRONT AND REAR FRAMES. TENSION AND DOUBLE NOTCH THE SEAL, ITEM 9.

(k) REPEAT STEPS (c) THROUGH (j) FOR THE SECOND ADAPTER UNIT.

(l) THREAD STRAPPING, ITEM 8, UP THROUGH THE STRAP LOOPS OF THE FRONT AND REAR FRAMES AND OVER THE TOP FRAMES. TENSION AND DOUBLE NOTCH THE SEAL, ITEM 9.

(m) POSITION STRAPPING, ITEM 7, TO SECURE LOAD TO PALLET, OVER THE ADAPTER UNIT STRAPPING, ITEM 5. TENSION AND DOUBLE NOTCH THE SEAL, ITEM 9.

MARKING:

THE UNIT LOAD SHALL BE MARKED IN ACCORDANCE WITH MIL-STD-1323 (NAVY).

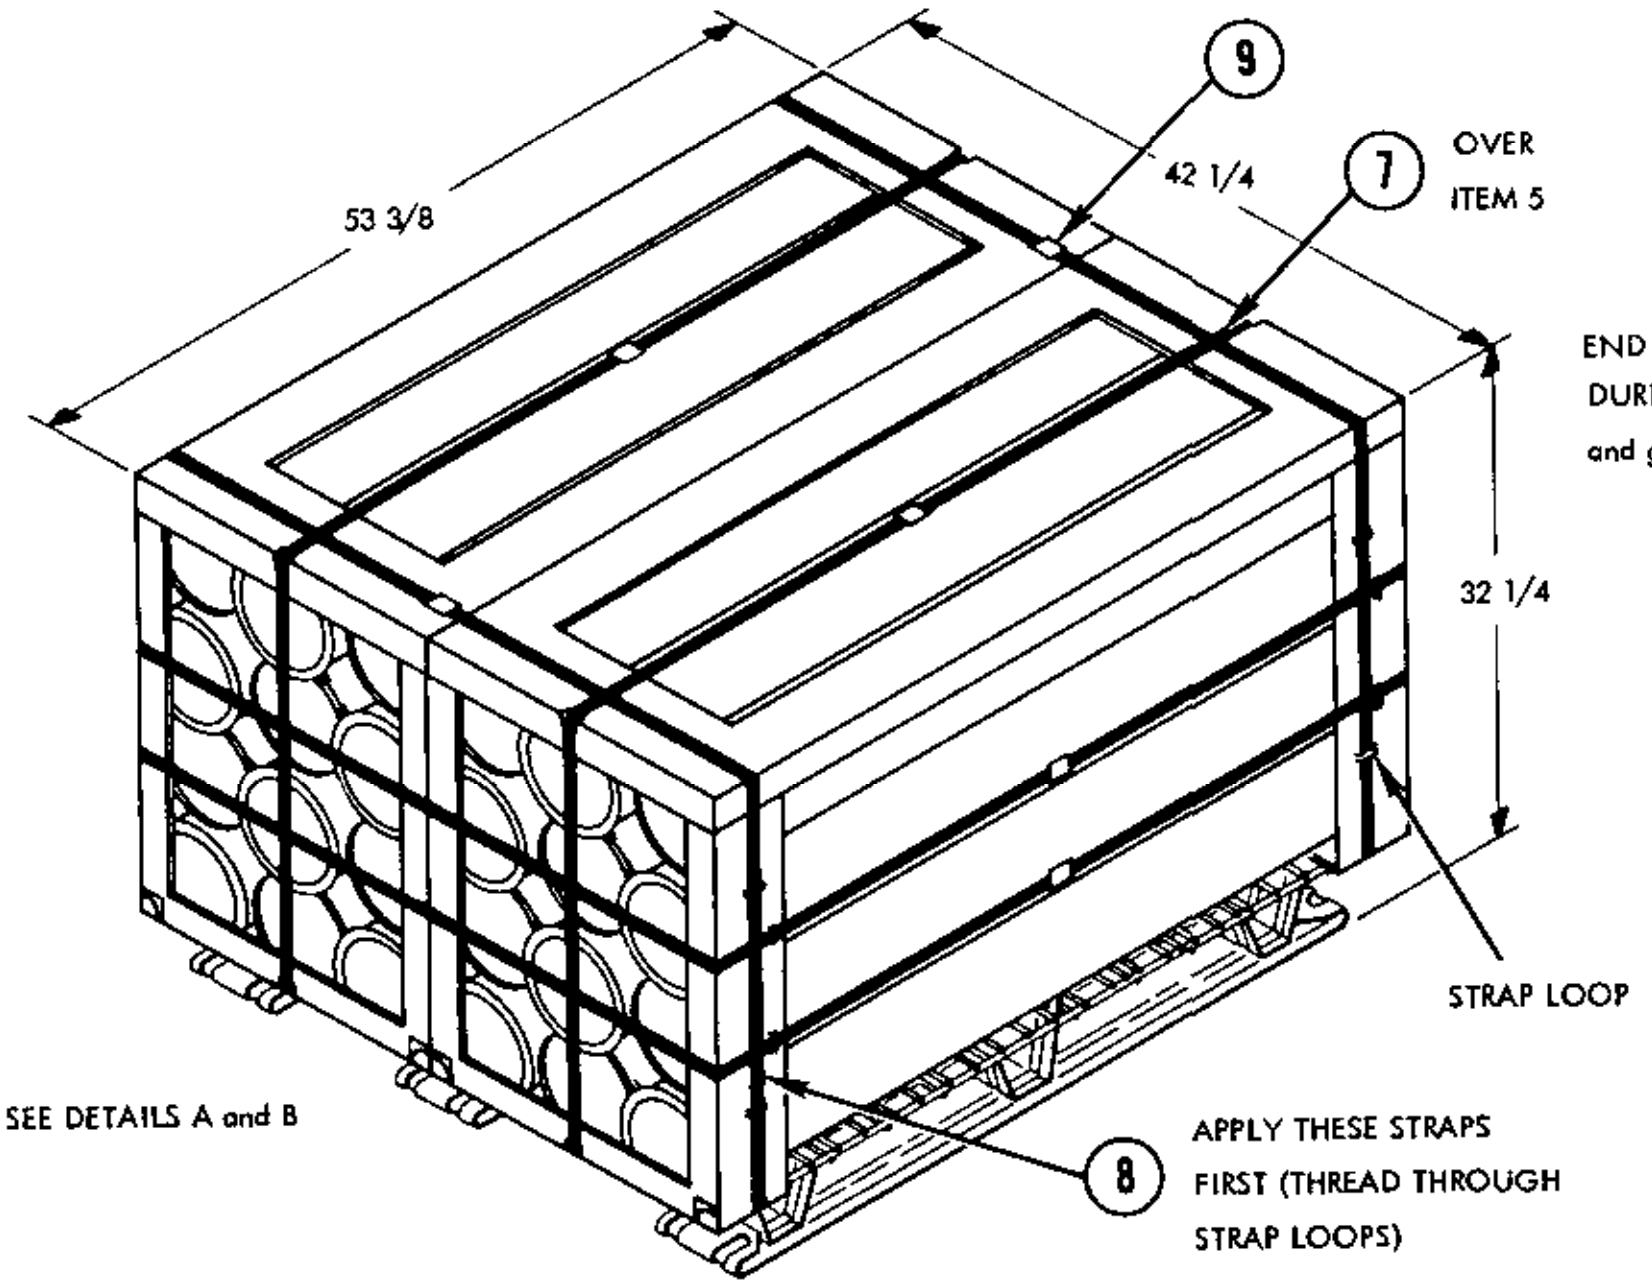

NOTE

END FRAMES MAY NEED SUPPORT DURING LOADING (SEE STEPS e, f and g) TO PREVENT TOPPLING.

DEPALLETIZING PROCEDURE

(a) CUT AND REMOVE THE PALLETIZING STRAPPING, ITEMS 7 AND 8.

CAUTION

DO NOT CUT ADAPTER UNIT STRAPPING, ITEMS 5 AND 6, IF THE ADAPTER UNITS ARE TO BE HANDLED/TRANSFERRED BEFORE REMOVING THE CONTAINERS.

(b) CUT AND REMOVE THE ADAPTER UNIT STRAPPING, ITEMS 5 AND 6.

(c) REMOVE TOP FRAME.

(d) REMOVE CONTAINERS.

(e) REMOVE FRONT AND REAR FRAMES.

NOTES: 1. .031 COLD ROLLED, HEAT TREATED, MAY BE SUBSTITUTED.
2. DO NOT USE TYPE I STRAPPING WITH POWER TOOLS.

REQ.	ITEM	DESCRIPTION	MAT'L.	MAT'L. SPEC.	DIMENSIONS
10	9	SEAL	STEEL	QQ-S-781, TY D, CL H, FIN A OR B	3/4
2	8	STRAPPING SEE NOTES 1 & 2	STEEL HEAVY DUTY	QQ-S-781, TY I OR IV, FIN B	3/4 X .035 X 13 FT.
2	7	STRAPPING SEE NOTES 1 & 2	STEEL HEAVY DUTY	QQ-S-781, TY I OR IV, FIN B	3/4 X .035 X 15 FT.
4	6	STRAPPING SEE NOTES 1 & 2	STEEL HEAVY DUTY	QQ-S-781, TY I OR IV, FIN B	3/4 X .035 X 14 FT.
2	5	STRAPPING SEE NOTES 1 & 2	STEEL HEAVY DUTY	QQ-S-781, TY I OR IV, FIN B	3/4 X .035 X 15 FT.
1	4	FRAME, TOP (ADAPTER MK 144)	STEEL	53711 - 5166444	53 3/8 X 21 1/8 X 2
2	3	FRAME, REAR (ADAPTER MK 144)	STEEL	53711 - 5166446	20 5/8 X 6 1/2 X 27
2	2	FRAME, FRONT (ADAPTER MK 144)	STEEL	53711 - 5166445	20 5/8 X 6 1/2 X 27
1	1	PALLET, MK 3 MOD 0	STEEL	10001 - 564200	40 X 48 X 4 3/4

LIST OF MATERIALS

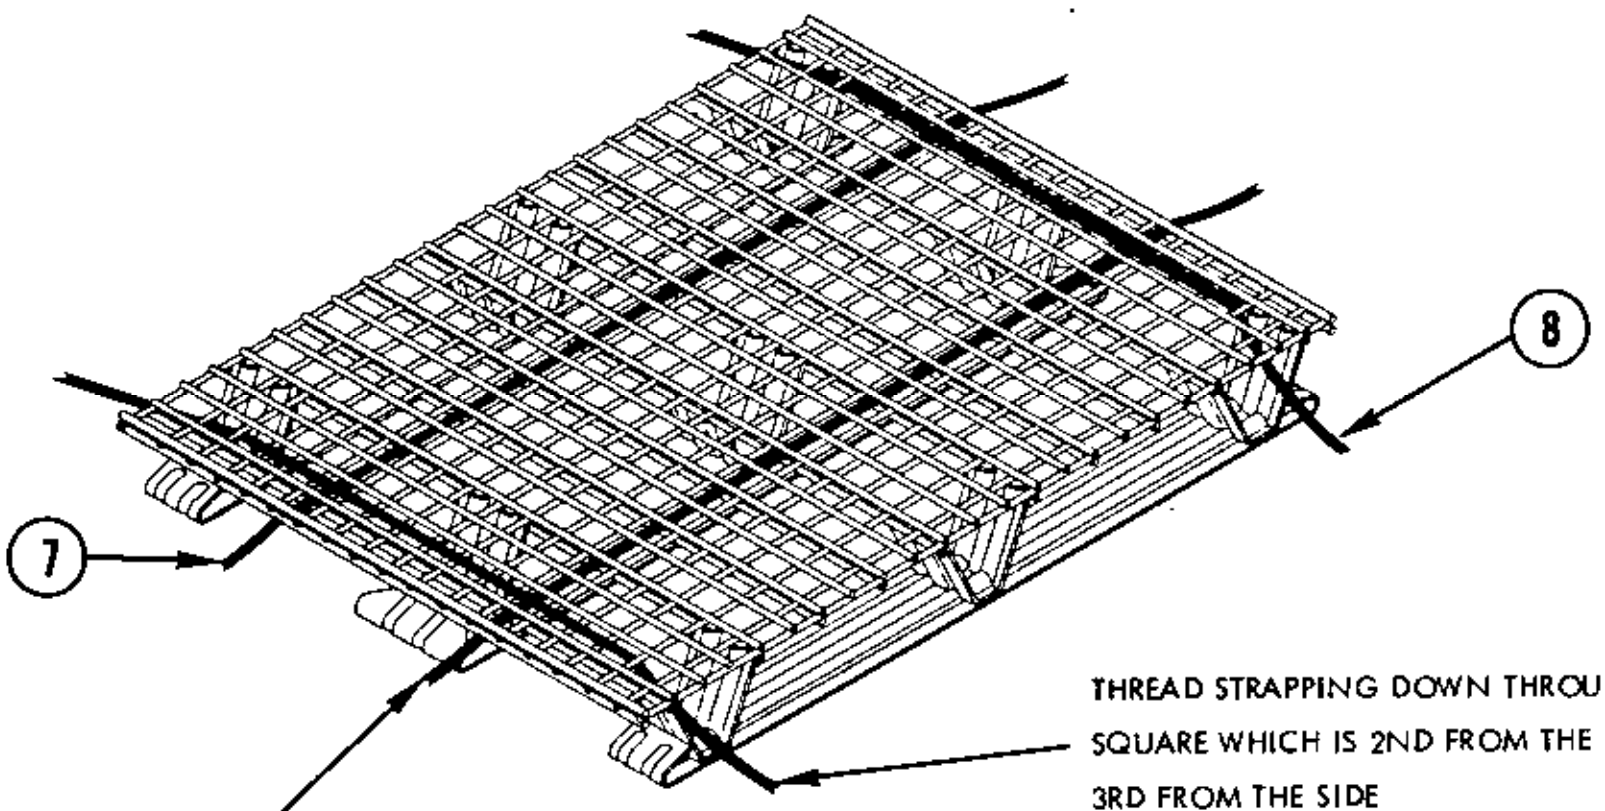

THREAD STRAPPING DOWN THROUGH THE SQUARE WHICH IS 2ND FROM THE END AND 3RD FROM THE SIDE

THREAD STRAPPING BETWEEN THE 6TH AND 7TH WIRE

DETAIL Ⓐ

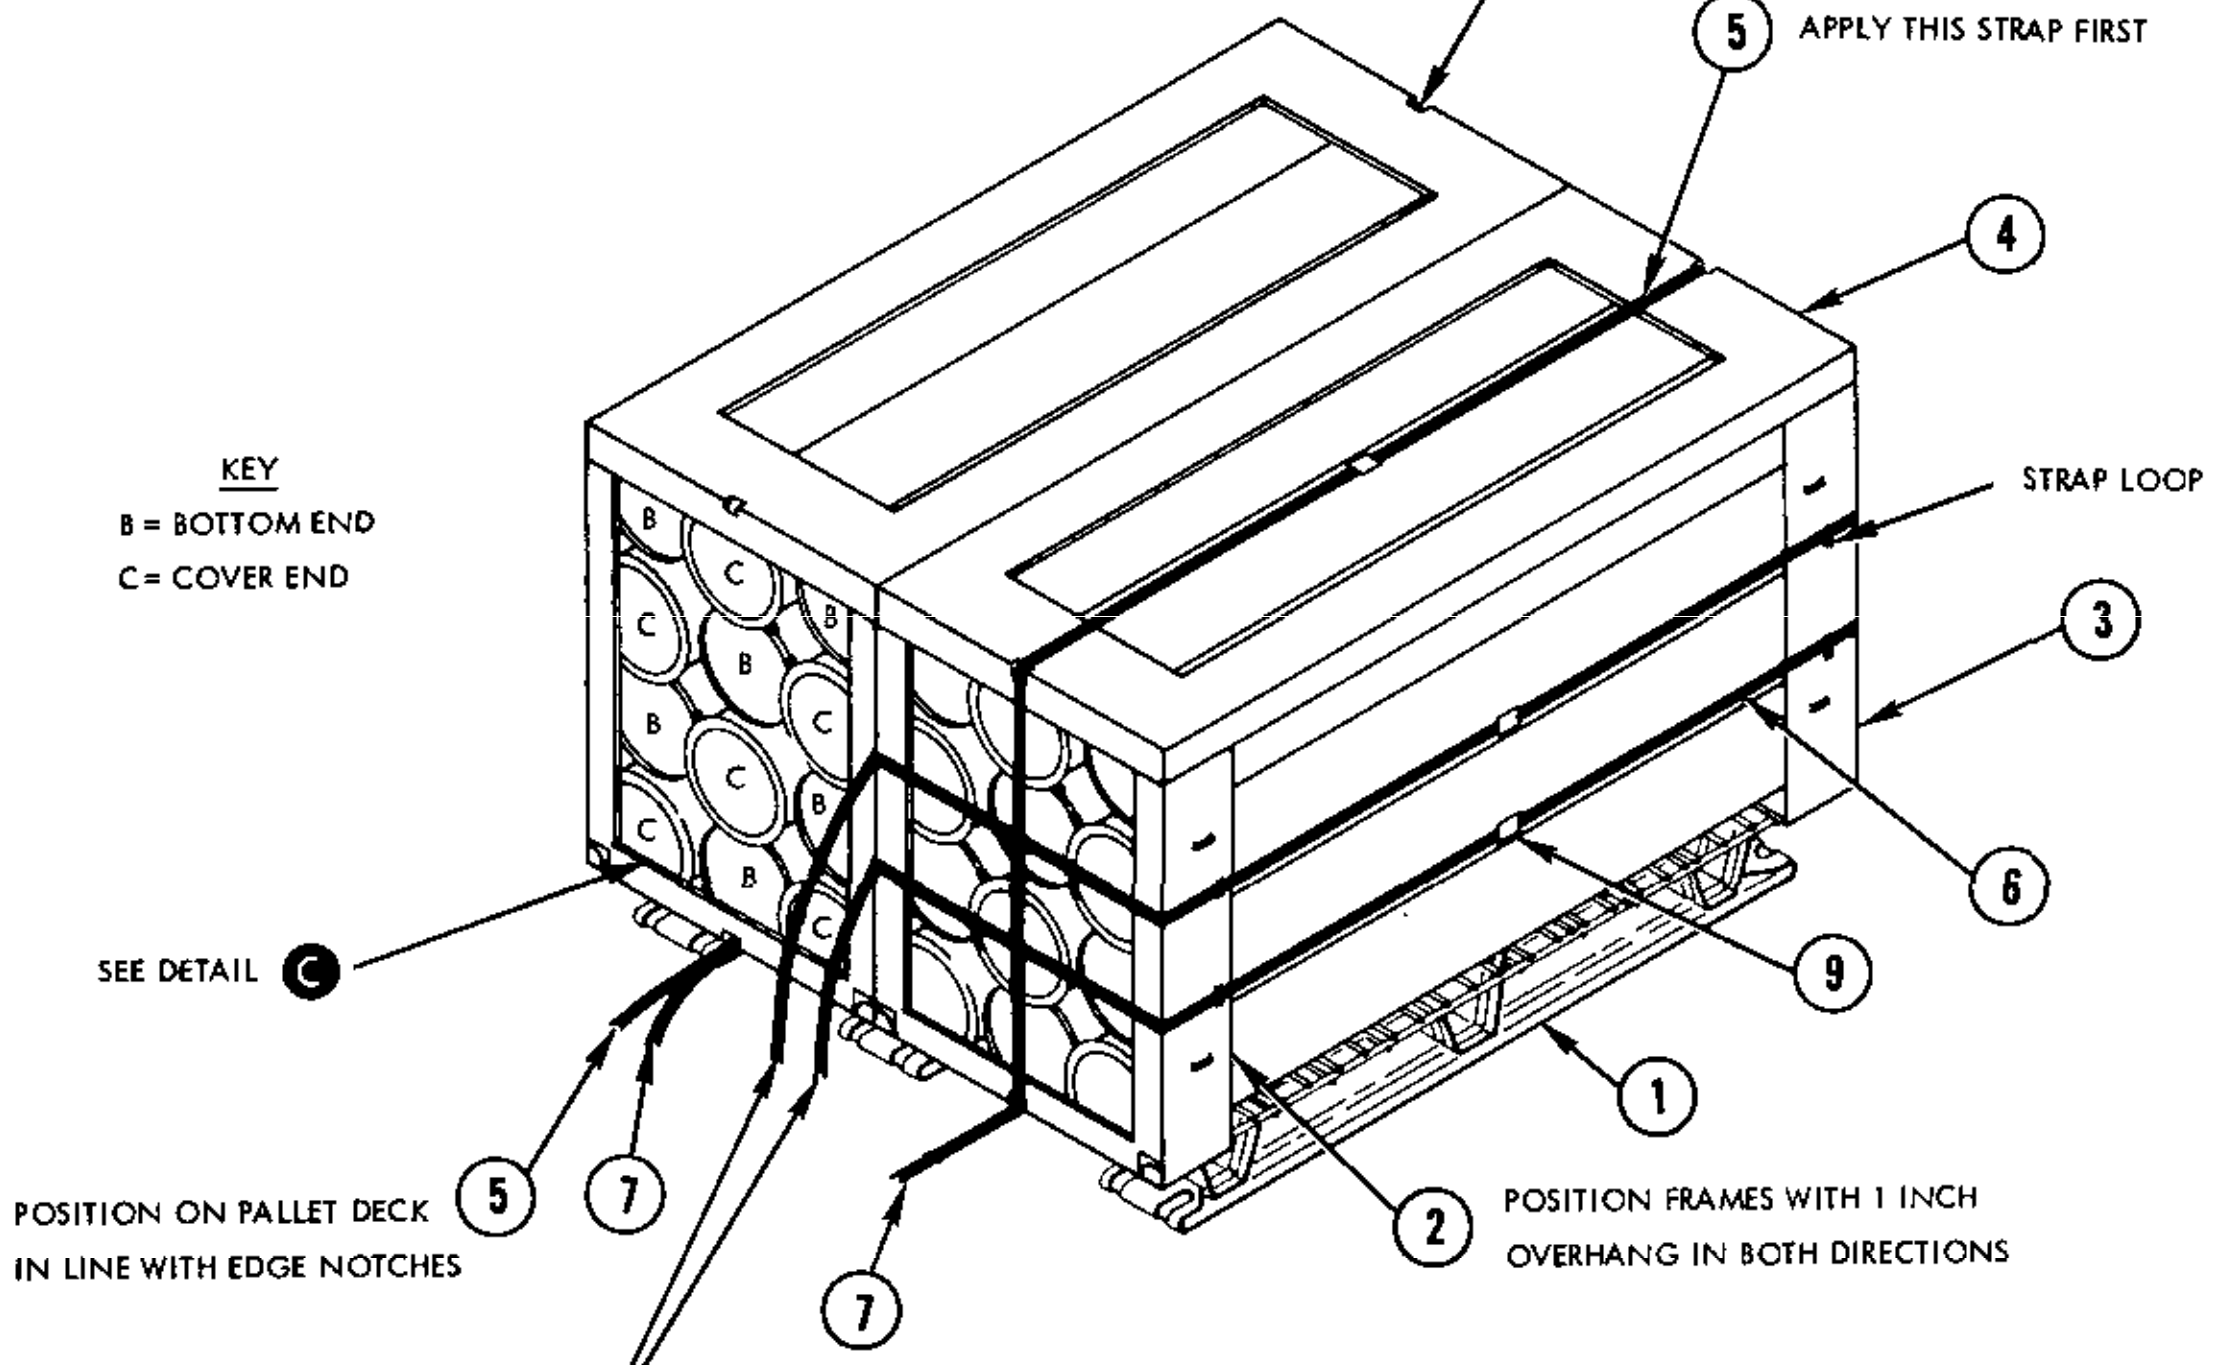

EDGE NOTCH

APPLY THIS STRAP FIRST

STRAP LOOP

KEY
B = BOTTOM END
C = COVER END

SEE DETAIL Ⓒ

POSITION ON PALLET DECK IN LINE WITH EDGE NOTCHES

POSITION FRAMES WITH 1 INCH OVERHANG IN BOTH DIRECTIONS

THREAD THROUGH STRAP LOOPS ON INBOARD SIDE BEFORE PLACING ADAPTER FRAMES ON PALLET

DETAIL Ⓑ

ADAPTER UNIT ASSEMBLY



DETAIL Ⓒ

POSITIONING OF END FRAMES

REVIEW ACTIVITY:
NAVY - OS

PREPARING ACTIVITY:
NAVY - OS
(PROJECT NO. 8140-N467)