MILITARY STANDARD

MIL-STD-1323-283A
(NAVY)
20 FEBRUARY 1997
SUPERSEDING
MIL-STD-283
2 NOVEMBER 1983

UNIT LOAD
FOR UNDERWAY REPLENISHMENT
FIN ASSEMBLY, BOMB, FOR 1000 LB G.P. BOMB MK 83
IN ADAPTER, PALLET, ADU-425/E


UNIT LOAD DATA DODIC/NALC NO. F642

NUMBER OF FIN ASSEMBLIES PER UNIT LOAD	12
WEIGHT OF ONE FIN ASSEMBLY	56.8 LBS
WEIGHT OF WOOD BATTENS	11 LBS
WEIGHT OF STEEL STRAPPING	7.4 LBS
WEIGHT OF PALLET	94 LBS
WEIGHT OF ADAPTER (2 FRAMES @ 45.50 LBS)	91 LBS
GROSS WEIGHT OF UNIT LOAD	885 LBS *
CUBE	43.7 CUFT


* DO NOT USE FOR SHIPPING WEIGHT

DO NOT STACK MORE THAN 4 UNIT LOADS HIGH
IN STORAGE

FOR UNIT LOAD QUALIFICATION
SEE NWHL REPORT 7557

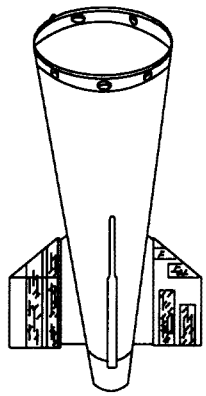

FIN ASSEMBLY
DWG. NO. 1380505
(WITH PROTECTORS ATTACHED)

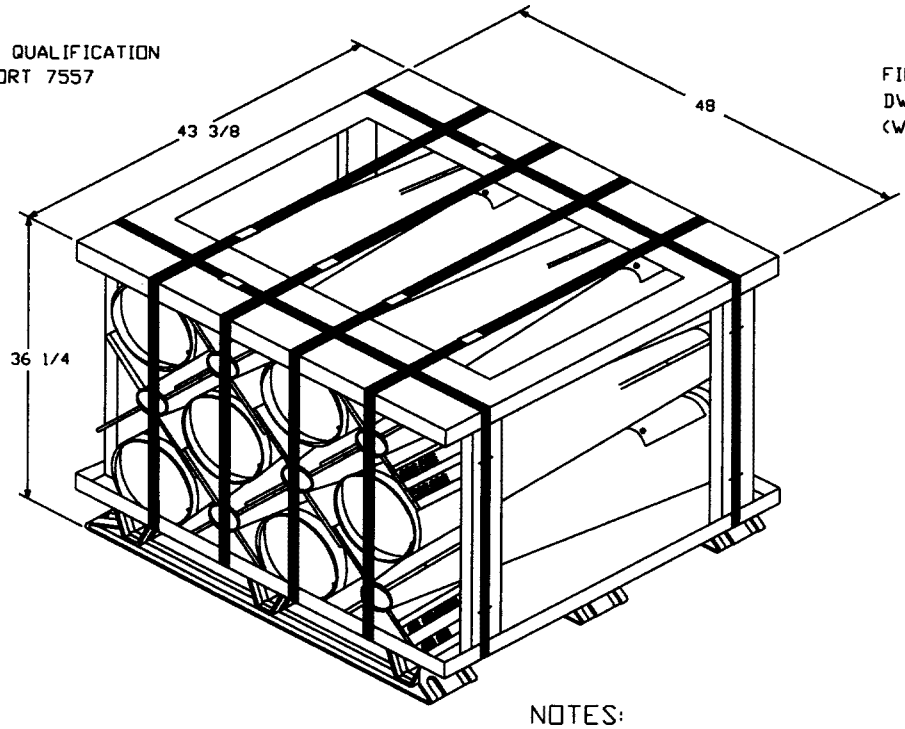

NOTES:
1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED TRUCKLOADING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY)

REV.	REVISION DESCRIPTION	DATE	TDA	SYSCOM
A	UPDATED MAT'L/DWG COLUMN & PROCEDURE (G)	2/20/97	4/7/97	4/7/97

FSC 8140

THIS UNIT LOAD IS AUTHORIZED AND RELEASED FOR SHIPPING, HANDLING STORAGE AND TRANSFER-AT-SEA. IT MAY ALSO BE USED FOR DOMESTIC SHIPMENT IN COMPLIANCE WITH DOT REGULATIONS.

S / M. S. GRAY NWHC — 10/21/83
SIGNATURE — TECHNICAL DIRECTION AGENT (TDA) — DATE

S / J. E. KELLY — 11/2/83
SIGNATURE — AIRSYSCOM BY DIRECTION — DATE

REQUIREMENTS FOR CONSTRUCTION OF THIS UNIT LOAD SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF MIL-STD-1323 (NAVY).

ORIGINATOR — S / CHARLES MCBRIDE — 11/2/83 DATE
NAVAL WEAPONS HANDLING CENTER
WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:58Z
Check the source to verify that this is the current version before use.

PALLETIZING PROCEDURE


(a) APPLY PROTECTORS, ITEM 6, TO FIN ASSEMBLIES AS SHOWN IN DETAIL ON PAGE 3.
(b) THREAD STRAPPING, ITEM 3, BETWEEN 4th & 5th DECK WIRES ON BOTH SIDES OF PALLET, ITEM 1, AS SHOWN IN DETAIL A ON PAGE 3.
(c) POSITION BOTTOM FRAME OF ADAPTER, ITEM 2, ON THE PALLET WITH THE FLANGES UP AND EQUAL OVERHANG ON BOTH SIDES.

NOTE

TOP & BOTTOM FRAMES OF ADAPTER ARE ALIKE.
ALL FIN ASSEMBLIES SHALL BE POSITIONED WITH THE ACCESS PORT UP.

(d) POSITION THE 1st LAYER OF FIN ASSEMBLIES AS SHOWN IN DETAIL B ON PAGE 3.
(e) POSITION THE 2nd & 3rd LAYERS OF FIN ASSEMBLIES, ALTERNATING END FOR END AND INTERLOCKING FINS AS SHOWN IN SECTION B-B ON PAGE 3.
(f) POSITION THE TOP FRAME OF ADAPTER, ITEM 2, ON THE FIN ASSEMBLIES WITH THE FLANGES DOWN.
(g) POSITION BATTENS, ITEM 8, INSIDE THE ADAPTER FLANGES AS SHOWN. ADVISORY: INSERT BATTEN IN BOTTOM FRAME AND LIFT CORNER OF TOP FRAME TO INSERT TOP END OF BATTEN. SHIM BEHIND BATTENS WHERE NECESSARY TO KEEP BATTENS FLUSH AGAINST TOP & BOTTOM FLANGES.
(h) POSITION STRAPPING, ITEM 3, OVER TOP FRAME OF ADAPTER. TENSION AND SECURE WITH DOUBLE NOTCHED SEAL, ITEM 5.
(i) POSITION STRAPPING, ITEM 4, UNDER PALLET DECK, AND OVER TOP FRAME OF ADAPTER. TENSION AND SECURE WITH DOUBLE NOTCHED SEAL, ITEM 5.
(j) SECURE STRAPPING TO BATTENS WITH STAPLES, ITEM 9, AS SHOWN.

MARKING:
IN ADDITION TO ANY SPECIAL MARKING REQUIRED BY CONTRACT OR ORDER, THE UNIT LOAD SHALL BE MARKED IN ACCORDANCE WITH MIL-STD-129.

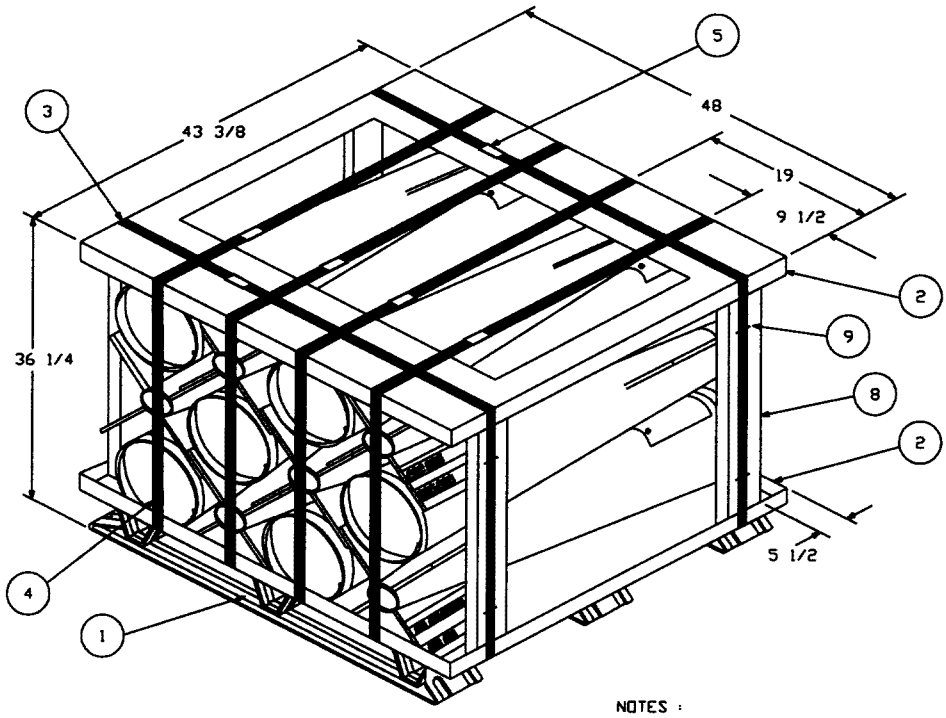

DEPALLETIZING PROCEDURE


(a) REMOVE STAPLES.
(b) CUT AND REMOVE STRAPPING.
(c) REMOVE TOP FRAME.
(d) REMOVE BATTENS.
(e) REMOVE FINS.
(f) REMOVE BOTTOM FRAME.

NOTES :
1. ALL MATERIALS SHALL BE AS SPECIFIED IN MIL-STD-1323.

REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
8	9	STAPLE	STEEL-SEE NOTE 1	3/4
4	8	BATTEN	WOOD-SEE NOTE 1	2 X 4 X 29 3/4
AS REQ'D	7	TAPE	FILM BACKED ASTM D 5486	
48	6	PROTECTOR	BARRIER MATERIAL MIL-B-22191	10 X 12
6	5	SEAL	SEE NOTE 1	3/4
4	4	STRAPPING, LONGITUDINAL	SEE NOTES 1 & 2	3/4 X .035 X 13 FT 6
2	3	STRAPPING, LATERAL	SEE NOTES 1 & 2	3/4 X .035 X 14 FT 6
1	2	ADAPTER, PALLET, ADU-425/E (TOP & BOTTOM FRAMES)	30003-1103AS100	43 3/8 X 48
1	1	PALLET, MK 3 MOD 0	564200	40 X 48 X 4 3/4


LIST OF MATERIALS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:58Z
Check the source to verify that this is the current version before use.

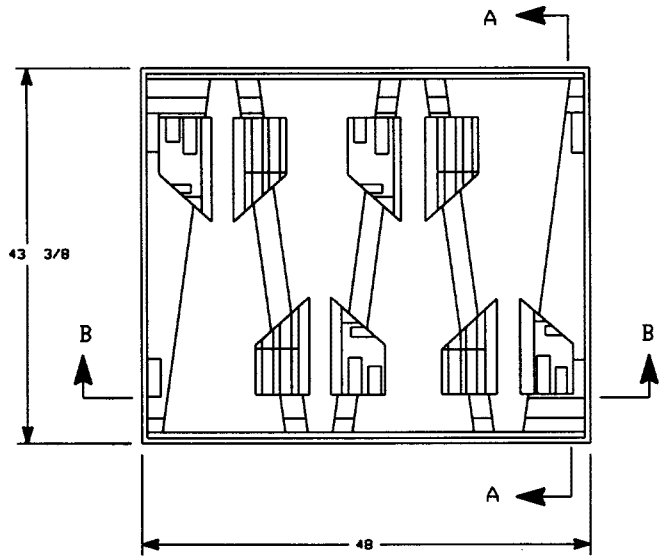


DETAIL B


(FIRST LAYER OF FINS IN BOTTOM FRAME)

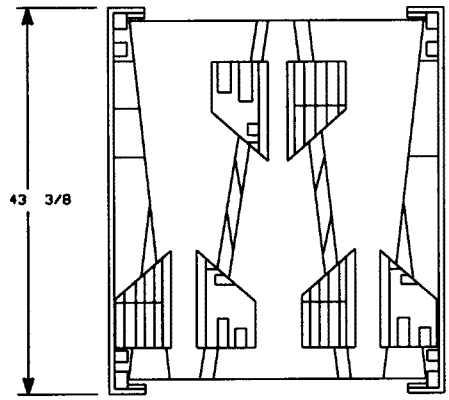


SECTION A-A

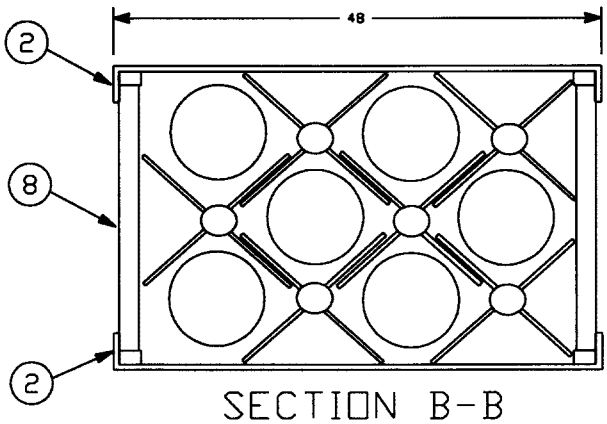

SECTION B-B

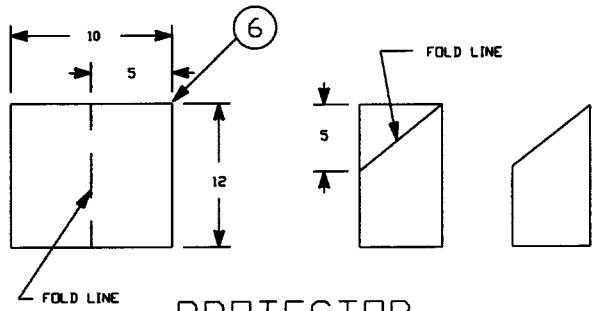


PROTECTOR

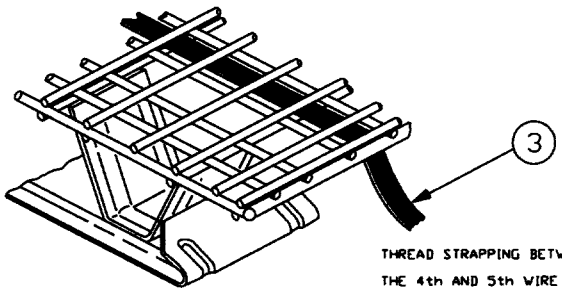

THREAD STRAPPING BETWEEN THE 4th AND 5th WIRE

DETAIL A

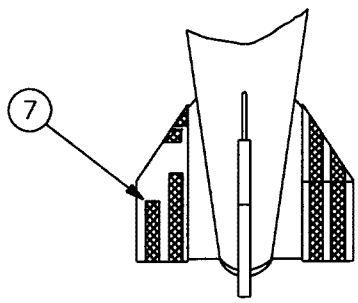

POSITION A FOLDED BARRIER MATERIAL PROTECTOR, ITEM 6, OVER EACH FIN ASSEMBLY AND SECURE IT WITH TAPE, ITEM 7, AS SHOWN.

REVIEW ACTIVITY:
NAVY-AS, OS

PREPARING ACTIVITY:
NAVY-OS
(PROJECT NO-8140-N534)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:58Z
Check the source to verify that this is the current version before use.