
MILITARY SPECIFICATION SHEET

CIRCULATOR, RADIO FREQUENCY, COAXIAL,
(4 PORTS, FREQUENCY RANGE - .60 TO .80 GHz)

This specification sheet is approved for use by Naval Electronic Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the circulator described herein shall consist of this document and the latest issue of Specification MIL-C-28790.

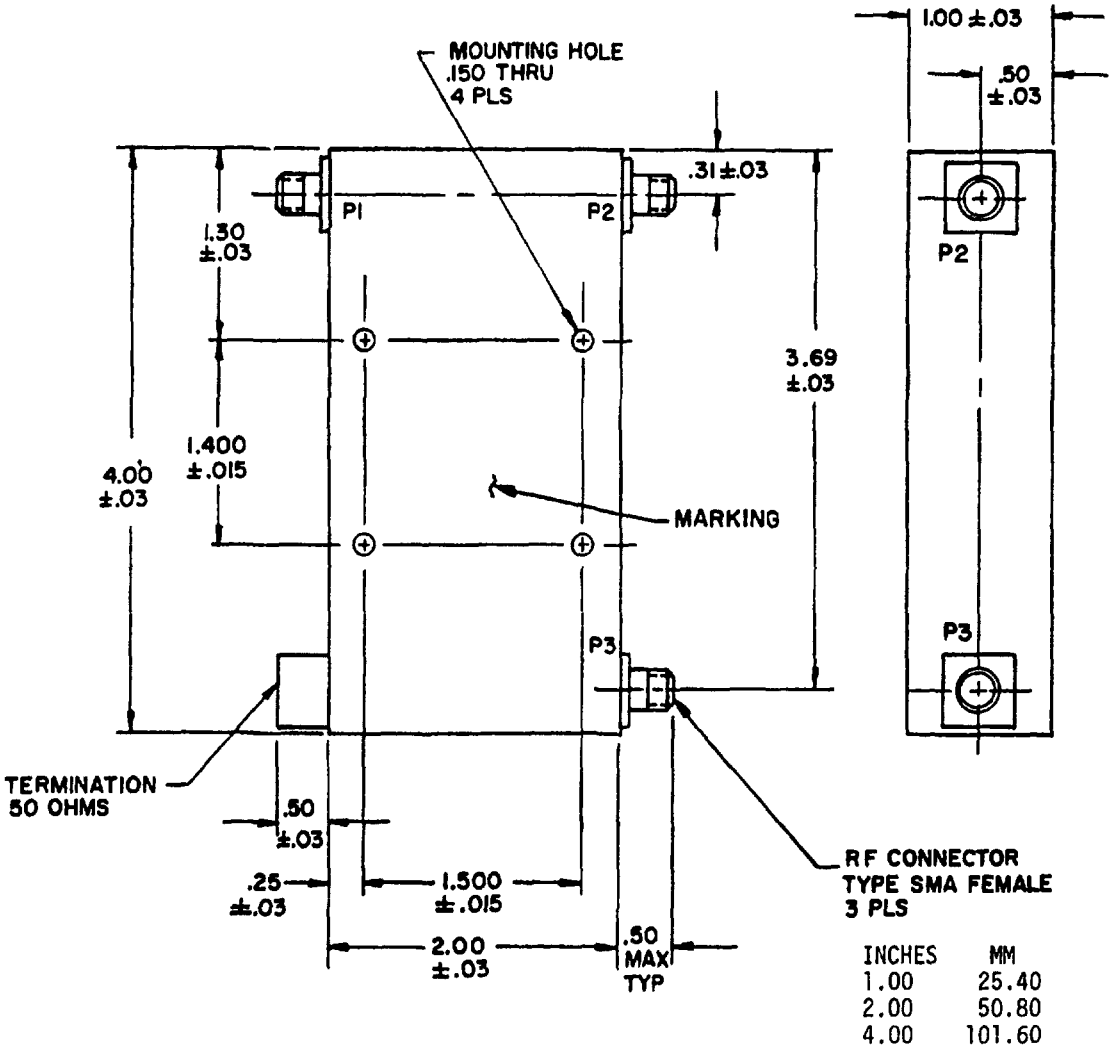

INCHES	MM
1.00	25.40
2.00	50.80
4.00	101.60

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 1. RF coaxial circulator.

FSC 5985

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:48Z
Check the source to verify that this is the current version before use.

ENGINEERING DATA:

Frequency range: .60 to .80 GHz.
Nominal impedance: 50 ohms.
Operating temperature range: -50°C to +100°C.
Power rating:
  Average - 20 watts.
  Peak - 10 kilowatts.
Circulation: 1 ⟶ 2 ⟶ 3 ⟶ 1.
RF connectors: Shall be stainless steel and shall mate with SMA male in accordance with MIL-C-39012.
Maximum altitude: 10,000 feet.

REQUIREMENTS:

Dimensions and configuration: See figure 1.
Dielectric withstanding voltage: 1,000 volts rms minimum.
Isolation:
  P2 to P1 - 18 dB minimum.
  P3 to P2 - 35 dB minimum.
Insertion loss:
  P1 to P2 - 0.5 dB maximum.
  P2 to P3 - 1.0 dB maximum.
VSWR: 1.3:1.
Shock (specified pulse): In accordance with MIL-C-28790, except test condition H.
Part number: M28790/3-01.

NOTE The circulator covered by this specification sheet is substitutable for the following commercial types:

Part number	Manufacturer's code	Commercial type
M28790/3-01	37695	36871-1
M28790/3-01	27338	100201273

Custodian:
  Navy - EC

Review activities:
  Navy -
  DSA - ES

User activity:
  Navy - OS, AS

Preparing activity:
  Navy - EC

Agent.
  DSA - ES

(Project 5985-N454)

Source: https://assist.dla.mil -- Downloaded: 20261O-20T18:48Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No 22-R255

INSTRUCTIONS. The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3 IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4 REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 202640-20T18:48Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL ELECTRONICS SYSTEMS COMMAND
WASHINGTON, D.C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT
DOD 316

OFFICAL BUSINESS

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-20T18:48Z
Check the source to verify that this is the currentversion before use.