

MILITARY SPECIFICATION SHEET

SWITCHES, LIQUID FLOW, SINGLE POLE, DOUBLE THROW (SPDT), 3 AMPERES, OPERATING TEMPERATURE (32°F to 185°F)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the switches described herein shall consist of this specification and the latest issue of MIL-S-28788.

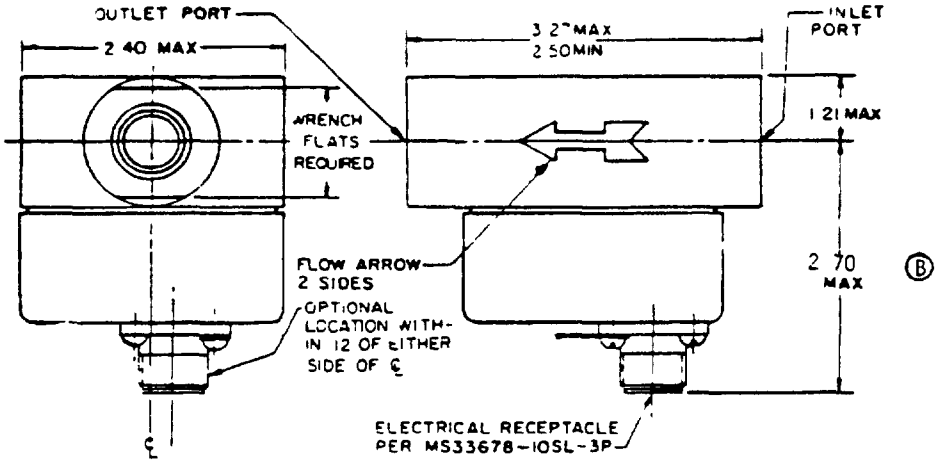



WIRING DIAGRAM
(SHOWN WITH ZERO FLOW)

INCHES	MM
.12	3.1
1.21	30.7
2.70	68.6
2.40	61.0
2.50	63.5
3.27	83.1

NOTES
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.02 (0.5 mm) for two place decimals and ±.005 (0.13 mm) for three place decimals.

Ⓑ FIGURE 1 Configuration and dimensions.

Ⓑ denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:47Z
Check the source to verify that this is the current version before use.

TABLE I Operating characteristics.

Military part number	Port size per MS16142 (B)		Switch flow rates		Pressure drop during flow	
	Inlet	Outlet	Actuation increasing GPM (max) at 104°F ±9°F	Deactuation decreasing GPM (min) at 104°F ±9°F	PSIG (max)	Rated flow GPM
M26788/1-1	-6	-6	.85	.60	5	1.00
-2	-6	-6	.42	27	5	.50
-3	-6	-6	.60	40	4 5	66
-4	-6	-6	.65	45	5	.75
-5	-8	8	3.70	2 90	5	4.0
-6	-6	-6	1.30	1 00	5	1.50
-7	-6	-6	1 80	1 50	5	2 00
8	-6	-6	2.30	2 00	5	2.50
9	-8	-8	2.70	2.40	5	3.00
-10	-8	-8	3.70	3.20	7	4.00
11	-8	8	4.50	4 00	7	5 00
-12	-8	-8	5.40	4 80	7	6.00
(B) -13	-8	-8	85	.75	5	1.00

REQUIREMENTS

Mounting See figure 1

Termination Connector MS33678-10SL-3P

Weight 1 6 pounds (725.76 grams) approximate.

Calibration See table I
Media Water

Ports See table I

Proof flow 225 percent of rated flow

Differential pressure See table I

Working pressure 25 to 5 PSIG

Proof pressure 150 PSIG

Burst pressure 300 PSIG

Temperature range
Working 32°F to 185°F
Nonworking -65°F to +200°F

Seal Electrical chamber only - hermetic.

Endurance 20 000 cycles.

Electrical rating 3 amperes inductive at 28 volts dc

Connector torque Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:47Z
Check the source to verify that this is the current version before use.

Vibration Grade 2.

Dielectric withstanding voltage
At atmospheric pressure. 1050 test voltage.
At reduced pressure Test condition C, 1 minute time duration.

QUALIFICATION

Group submission See table II.

TABLE II. Extent of qualification.

Switches for testing	Number of sample units	Examination or test	Extent of approval
M28788/1-2	All sample units	Qualification inspection of MIL-S-28788	All
M28788/1-9 -12	2 each	Visual and mechanical examination.	
		Operating characteristics	
		Vibration, Shock, and Electrical endurance.	

Custodians
Army - ER
Navy - EC
Air Force - 85

Review activities
Army - MI
Navy - AS, OS
Air Force - 17, 80
DLA - ES

User activities
Army - AT, AV, ME
Air Force - 19

Agent
DLA - ES

Preparing activity
Navy - EC

(Project 5930-1269)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:47Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY
Naval Electronic Systems Command
Washington, DC 20363

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20363
ATTN: ELEX 8111

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:47Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-S-28788/1B	

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)* ____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c. Reason/Rationale for Recommendation

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:47Z
Check the source to verify that this is the current version before use.