|INCH-POUND|

MIL-M-28787/536
AMENDMENT 1
29 September 1993

MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

MEMORY INTERFACE II MODULE, KEY CODE EWD

This amendment forms a part of Military Specification MIL-M-28787/536, dated 15 September 1989, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 4

TABLE I, Test conditions A1 and A2-A4: Add End-of-life limits below each line with a minimum limit of 1 MOhm (all temperatures) and a maximum limit of INF MOhm (all temperatures).

PAGE 5

TABLE I, Test condition F7, Min column (all temperatures): Delete "-1.8" (three places) and substitute "-3.8" (three places).

TABLE I, Test condition F7, Max column (all temperatures): Delete "0.06" (three places) and substitute "0.11" (three places).

TABLE I, Test condition F22, Min column (all temperatures): Delete "-0.6" (three places) and substitute "-2.6" (three places).

TABLE I, Test condition F22, Max column (all temperatures): Delete "0.06" (three places) and substitute "0.11" (three places).

AMSC N/A FSC 5963
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:39Z
Check the source to verify that this is the current version before use.

PAGE 6

TABLE I, Test condition N, Min column (all temperatures): Delete "590" (three places) and substitute "500" (three places).

TABLE I, Test condition N, Max column (all temperatures): Delete "1416" (three places) and substitute "1410" (three places).

PAGE 10

FIGURE 1: Delete and substitute new figure 1 as printed on page 5 of this amendment.

PAGE 17

6.3, fourth line: Delete "7.79 W (max); 5.22 W (typical)" and substitute "7.76 W (max); 5.00 W (typical)".

PAGE 18

6.3.1, Signal DTR HLD OFF, Iih column: Delete "0.06" and substitute "0.11".

PAGE 19

6.3.1, Signal INTRNL ATR, Iih column: Delete "0.06" and substitute "0.11".

PAGE 33

6.3.3, Ref num 10: Delete "MODULE EN A" and substitute "MODULE CD A".

6.3.3, Ref num 10: Delete "MODULE EN B" and substitute "MODULE CD B".

6.3.3, Ref num 10: Delete "MODULE EN C" and substitute "MODULE CD C".

PAGE 40

6.4.18, second line: Delete "(BWH)" and substitute "(BWAH)".

PAGE 47

TABLE II, Test condition A2, Connect B to pin column: Delete "Frame" and substitute "48,49,99".

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:39Z
Check the source to verify that this is the current version before use.

PAGE 63

TABLE VII, Test condition F7, Min column: Delete "-1.8" and substitute "-3.8".

TABLE VII, Test condition F7, Max column: Delete "0.06" and substitute "0.11".

PAGE 64

TABLE VII, Test condition F22, Min column: Delete "-0.06" and substitute "-2.6".

TABLE VII, Test condition F22, Max column: Delete "0.06" and substitute "0.11".

PAGE 66

TABLE VII, NOTES, Test condition F7, Input current measurement accuracy: Delete "93" and substitute "196".

TABLE VII, NOTES, Test condition F22, Input current measurement accuracy: Delete "33" and substitute "136".

PAGE 92

TABLE XIV, Test condition N, Min column: Delete "590" and substitute "500".

TABLE XIV, Test condition N, Max column: Delete "1416" and substitute "1410".

TABLE XIV, Test tolerance table, Power supply current measurement accuracy: Delete "41.3" and substitute "45.5".

PAGE 95

FIGURE 11: Delete and substitute new figure 11 as printed on page 6 of this amendment.

PAGE 107

TABLE XVII, Ref num 10: Delete "MODULE EN A" and substitute "MODULE CD A".

TABLE XVII, Ref num 10: Delete "MODULE EN B" and substitute "MODULE CD B".

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:39Z
Check the source to verify that this is the current version before use.

TABLE XVII, Ref num 10: Delete "MODULE EN C" and substitute "MODULE CD C".

PAGE 110

FIGURE 12c: Delete and substitute new figure 12c as printed on page 7 of this amendment.

PAGE 116

TABLE XIX, NOTE 2: Append the following:
"(d) Apply pulse to the module for a duration of 500 ± 20 nS."

Custodians:
Army - ER
Navy - NW
Air Force - 85

Review activities:
Army - AT
Navy - AS, MC
Air Force - 13, 19
DLA - ES

Preparing activity:
Navy - NW

(Project 5963-0288)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:39Z
Check the source to verify that this is the current version before use.

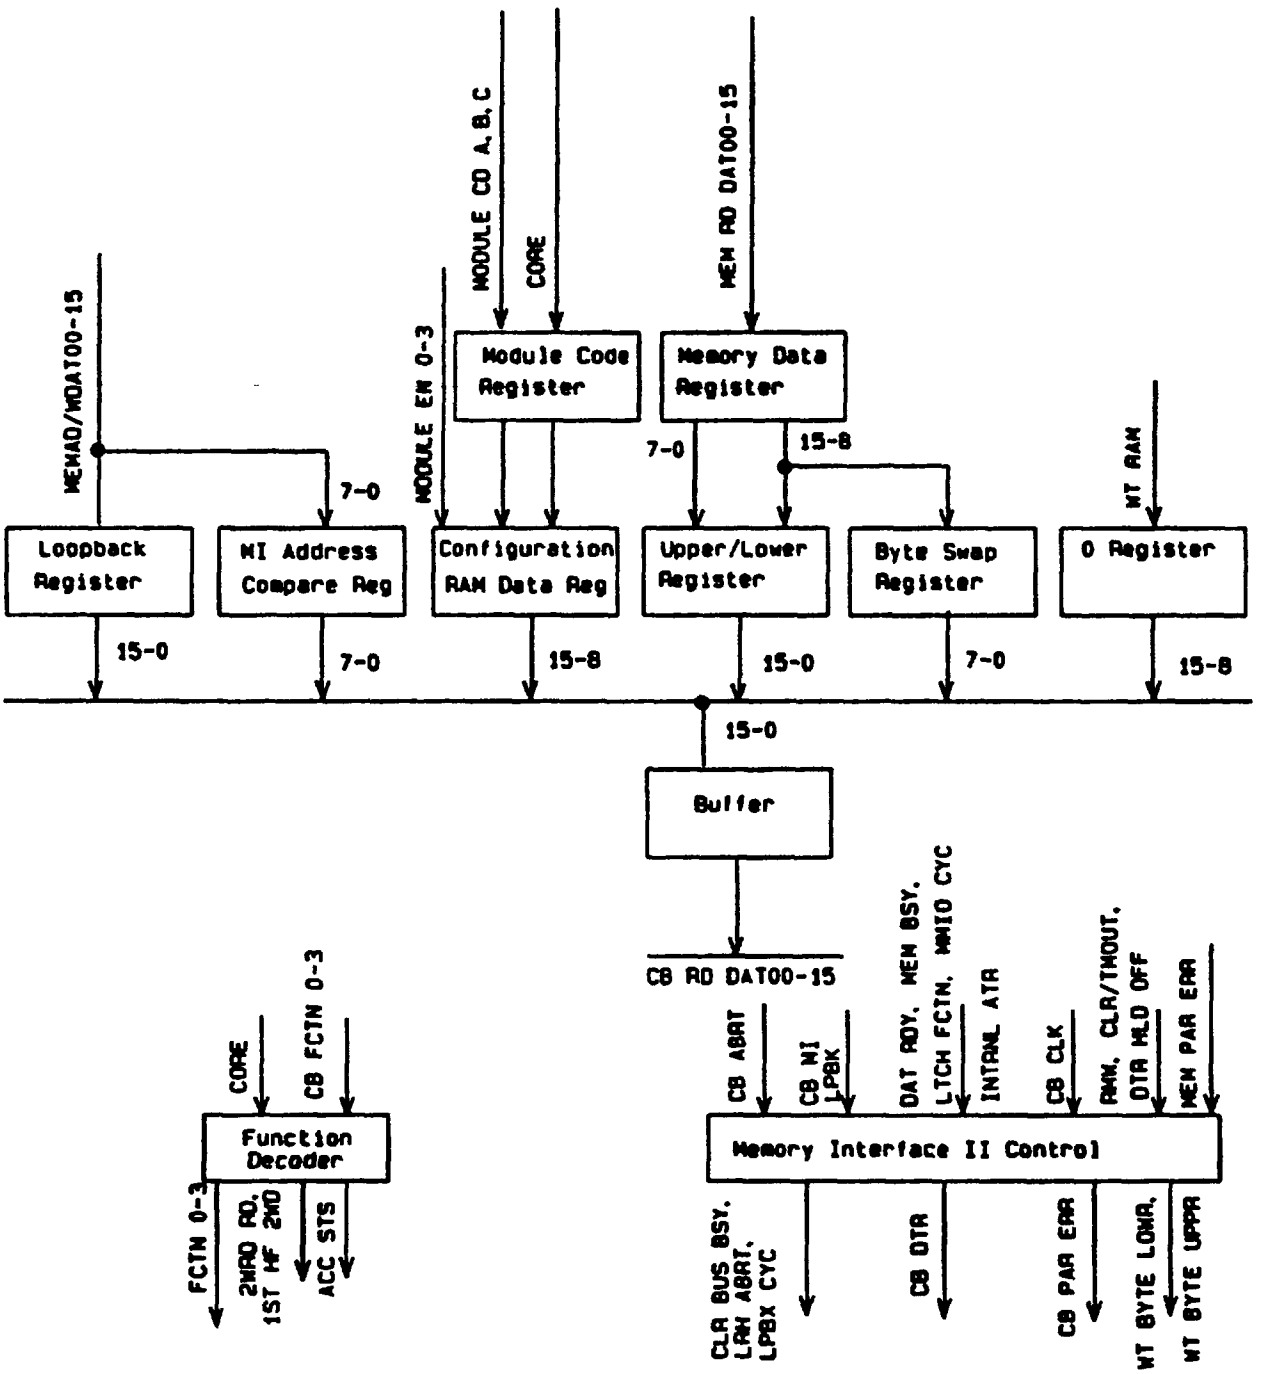


FIGURE 1. EWD functional block diagram.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:39Z
Check the source to verify that this is the current version before use.

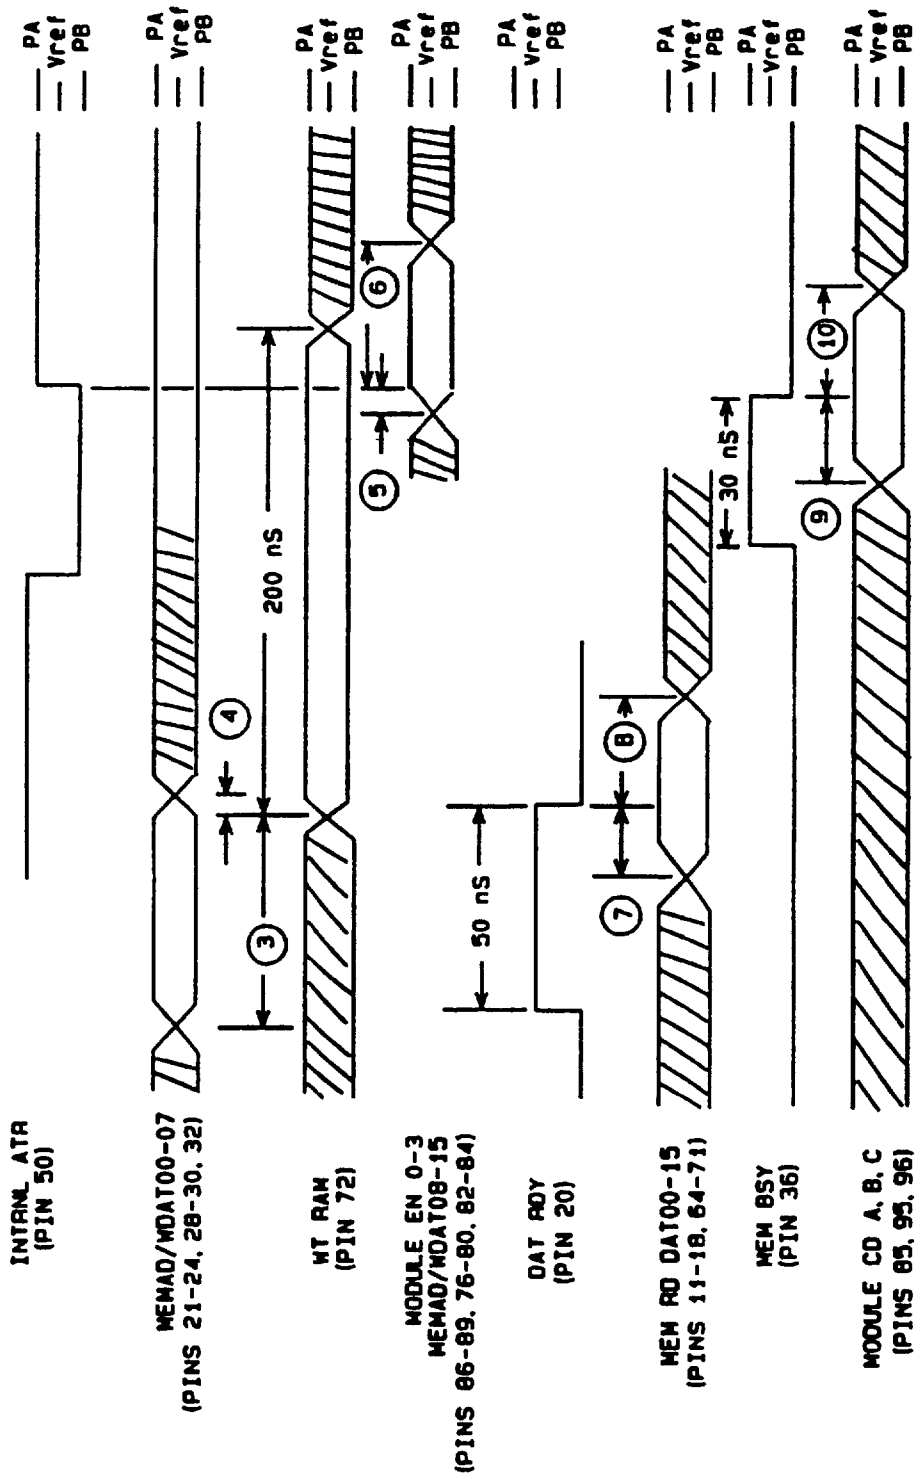


FIGURE 11. Input timing parameters for table XV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:39Z
Check the source to verify that this is the current version before use.

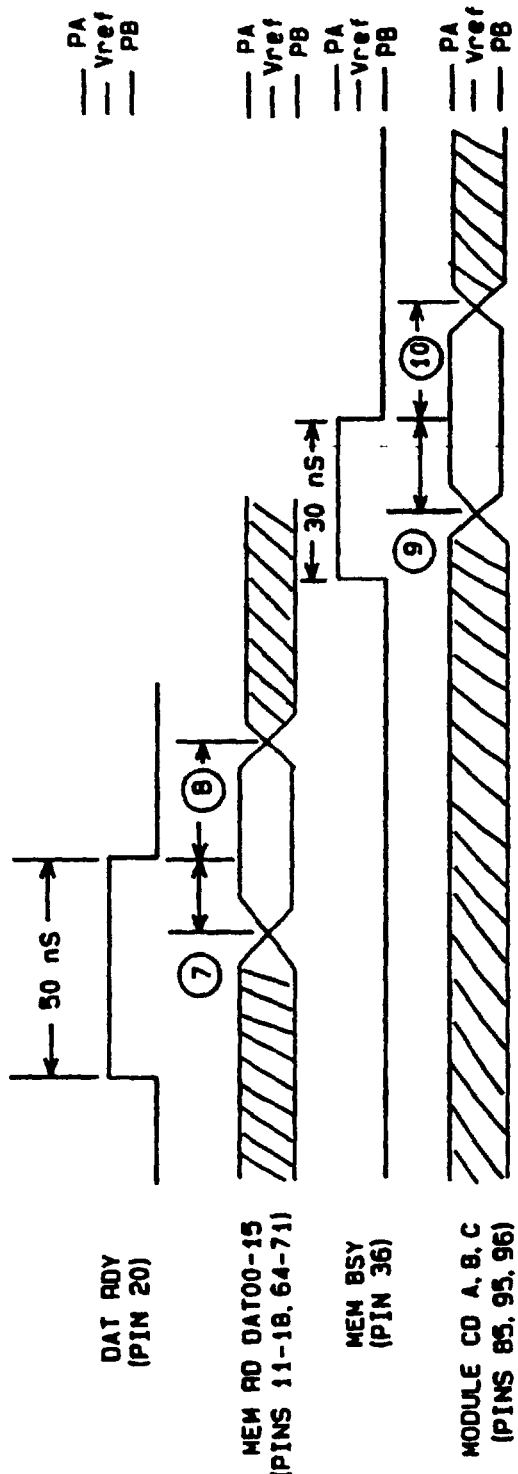


FIGURE 12c. Dynamic waveforms for table XVII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:39Z
Check the source to verify that this is the current version before use.