INCH-POUND


MIL-C-28731/23E
27 November 1990
SUPERSEDING
MIL-C-28731/23D
4 June 1985

MILITARY SPECIFICATION SHEET


CONNECTOR, ELECTRICAL, CONTACT, FORK TYPE, REMOVABLE, DOUBLE WIRE CRIMP

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-28731.

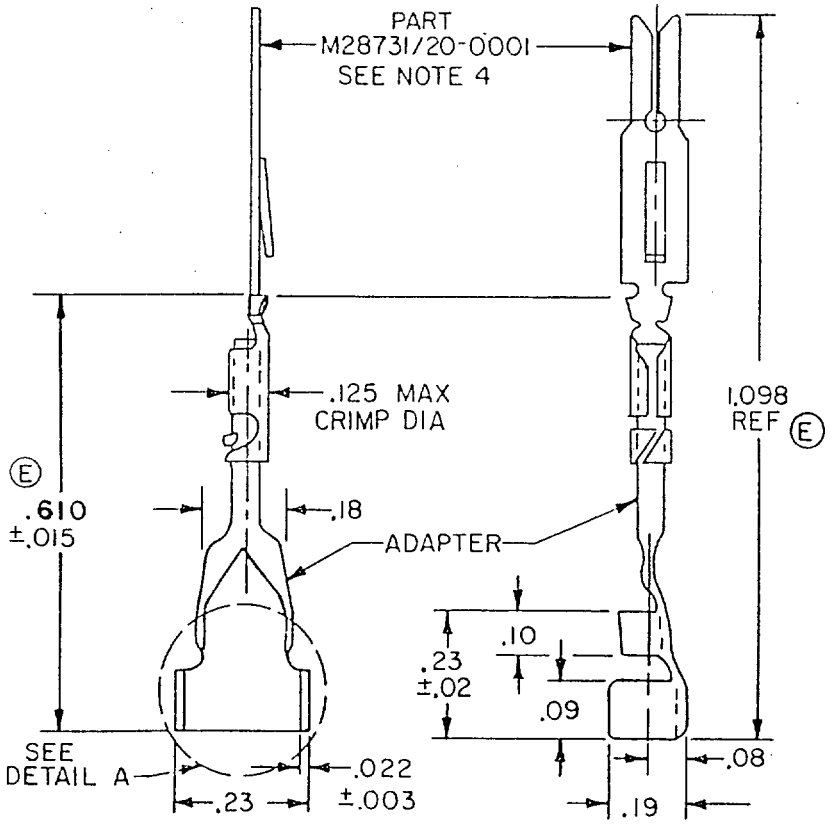

Inches	mm	
.003	0.08	
.015	0.38	
.020	0.51	
.022	0.56	
.080	2.03	
.090	2.29	
.100	2.54	
.125	3.18	
.180	4.57	
.190	4.83	
.230	5.84	
.610	15.49	(E)
1.098	27.89	



DETAIL A

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.010 (0.25 mm).
4. The adapter shall be crimped as shown to a contact in accordance with MIL-C-28731/20.

FIGURE 1. Contact, fork type, double wire crimp.

(E) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:59Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Material (adapter): Brass per QQ-B-626.

Plating: Adapter shall be gold plated in accordance with MIL-G-45204, type II, grade D, class 1 (50 microinches minimum) over nickel plating per QQ-N-290 class 2, 50 to 150 microinches.

Crimp diameter: .125 inch (3.18 mm) maximum.

Adapter crimp tensile strength: 35 pounds, minimum.

Wire crimp tensile strength: During crimp tensile strength testing of wires, only one wire shall be tested for each barrel and the required value shall be as shown in table I.

TABLE I. Minimum tensile strength versus wire size (per MIL-W-16878/4, 7 or 9 strands).

Wire size (AWG)	Minimum tensile strength (lbs)
16	35.0
18	25.0
20	20.0

Application: Crimp shall accept wires of the following AWG sizes and combinations: Two AWG 16 wires, two AWG 18 wires, two AWG 20 wires, one AWG 20 and one AWG 16, and two AWG 20 wires.

Crimping tools (Elco CAGE 91662):

a. Part number 06774801 or equivalent shall be used for:

(1) 2-16 AWG wires
(2) 1-16 and 1-20 AWG wires

b. Part number 06774901 or equivalent shall be used for:

(1) 1-16 and 1-20 AWG wires
(2) 2-18 AWG wires
(3) 2-20 AWG wires

Contact resistance: Dependent upon wire size. See value specified in table II.

Part number: M28731/23-0001.

NOTE: This unit shall be preassembled by manufacturer and supplied loose for hand crimping and installation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:59Z
Check the source to verify that this is the current version before use.

TABLE II. Wire size versus contact resistance and low level circuit resistance.

Wire size (AWG)	Contact resistance			Low level circuit resistance		
	Test current (amp)	Max. potential drop (mV)	Max. contact resistance (mΩ)	Test current (amp)	Max. potential drop (mV)	Max. contact resistance (mΩ)
16	8.5	59.5	7.0	.001	7.0	7.0
18	8.5	59.5	7.0	.001	8.0	8.0
20	7.5	52.5	7.0	.001	10.0	10.0

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - AR, AT, MI
Navy - AS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AL, AV, ME
Navy - MC, OS
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5935-3793-04)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:59Z
Check the source to verify that this is the current version before use.