INCH-POUND


MIL-C-28731/23F
29 OCTOBER 1992
SUPERSEDING
MIL-C-28731/23E
27 November 1990

MILITARY SPECIFICATION SHEET


CONNECTOR ELECTRICIAL, CONTACT, FORK TYPE, REMOVEABLE, DOUBLE WIRE CRIMP

This specification is approved for use by all Departments and Agencies of the department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation· MIL-C-28731F

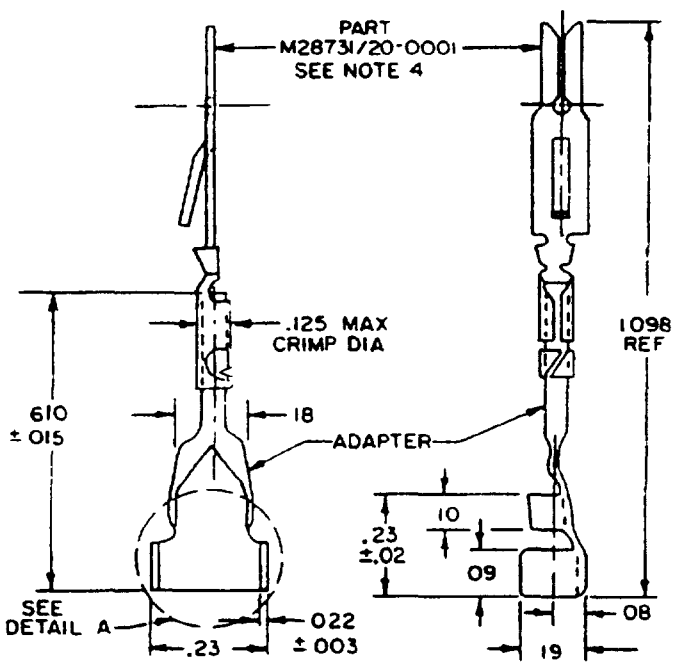

Inches	mm
003	0.08
015	0.38
.020	0.51
022	0 56
.080	2.03
.090	2.29
.100	2.54
125	3 18
.180	4.57
190	4.38
.230	5.94
610	15.49
1.098	27.89



DETAIL A

NOTES.
1. Dimensions are in inches
2. Metric equivalents are given for general information only.
3. Unless otherwise specified the tolerance for three place decimals is ± 010 (0.25 mm)
4. The adapter shall be crimped as shown to a contact in accordance with MIL-C-28731

F Figure 1. Contact, fork type, double wire crimp

F denotes changes

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:59Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration See figure 1

Material (adapter) Brass per QQ-B-626

(F) Plating Adapter shall be gold plated in accordance with MIL-G-45204, type II, grade C, class 1 (50 microinches minimum) over nickel plating in accordance with QQ-N-290, class 2, 50 to 150 microinches.

Crimp diameter .125 inch (3.18 mm) maximum

Adapter crimp tensile strength 35 pounds, minimum

Wire crimp tensile strength: During crimp tensile strength testing of wires, only one wire shall be tested for each barrel and the required value shall be as shown in table I.

TABLE I. Minimum tensile strength vs wire size (in accordance with MIL-W-16878/4, /7, or /19 strands)

Wire size (AWG)	Minimum tensile strength (lbs)
16	35.0
18	25.0
20	20.0

Application Crimp shall accept wires of the following AWG sizes and combinations Two AWG 16 wires, two AWG 18 wires, two AWG 20 wires, one AWG 20 and one AWG 16 and two AWG 20 wires

(F) Crimping tools (Elco CAGE 91662)

a Part number 06774801 or equivalent shall be used for

(1) 2-16 AWG wires
(2) 1-16 and 1-20 AWG wires

b Part number 06774901 or equivalent shall be used for

(1) 1-16 and 1-20 AWG sires
(2) 2-18 AWG wires
(3) 2-20 AWG wires

(F) Contact resistance. Dependent upon wire size See value specified in table II

Military part number M28731/23-0001

Note This unit shall be preassembled by the manufacturer and supplied loose for hand crimping and installation

TABLE II. Wire size vs contact resistance and low level circuit resistance

Wire size (AWG)	Contact resistance			Low level circuit resistance		
	Test current (amperes)	Maximum potential drop (mV)	Maximum contact resistance (mΩ)	Test current (amperes)	Maximum potential drop (mV)	Maximum contact resistance (mΩ)
16	8.5	59.5	7.0	.001	7.0	7.0
18	8.5	59.5	7.0	.001	8.0	8.0
20	7.5	52.5	7.0	.001	10.0	10.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:59Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review Activities:
Army - AR, AT, MI
Navy - AS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AL, AV, ME
Navy - MC, OS
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5935-3886)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:59Z
Check the source to verify that this is the current version before use.