
MILITARY SPECIFICATION SHEET

CONNECTOR, ELECTRICAL, RECTANGULAR SHIELD, FOR 120 REMOVABLE CONTACTS

This specification is approved for use by all Departments and Agencies of the Department of Defense

The complete requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-28731.

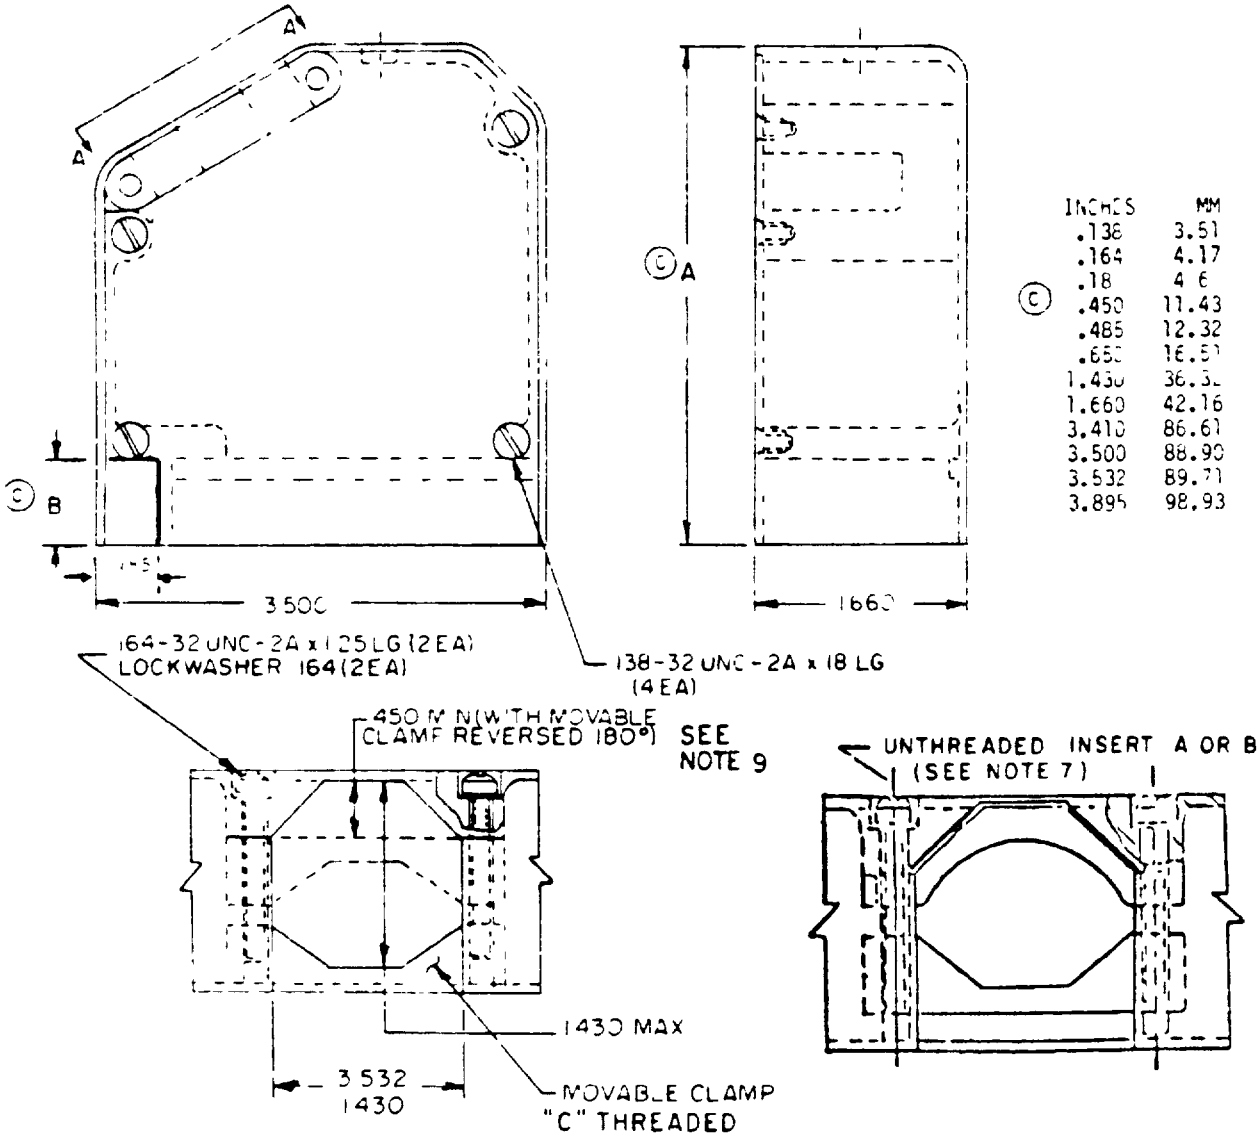


©	INCHES	MM
	.138	3.51
	.164	4.17
	.18	4.6
©	.450	11.43
	.485	12.32
	.650	16.51
	1.430	36.32
	1.660	42.16
	3.410	86.61
	3.500	88.90
	3.532	89.71
	3.895	98.93

VIEW A-A

FIG. 1. Shield, rectangular.


© denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:59Z
Check the source to verify that this is the current version before use.

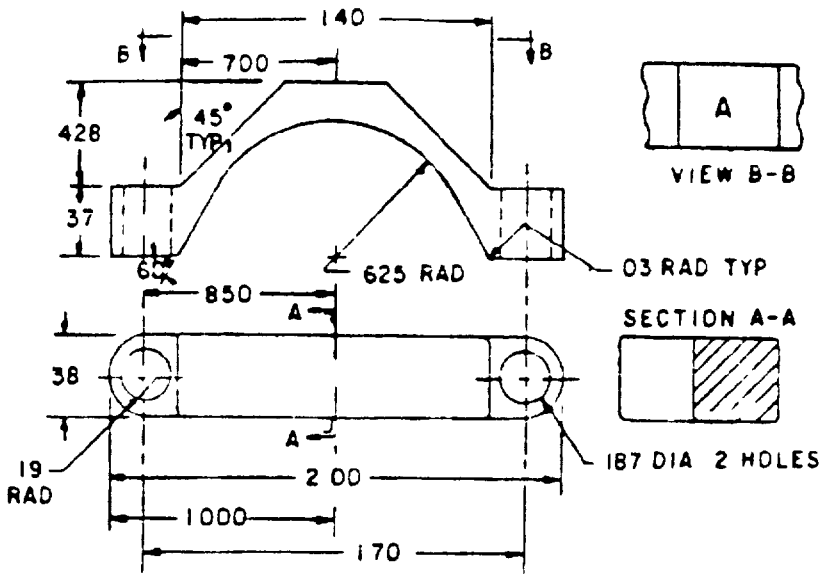

INCHES	MM
.03	8
.156	4 [illegible]
.19	4.8
.37	9.4
.38	9.7
.428	10.87
.625	15.88
.700	17.78
.850	21.59
1.000	25.40
1.40	35.6
1.70	43.2
2.00	50.8

Configuration A — Insert A

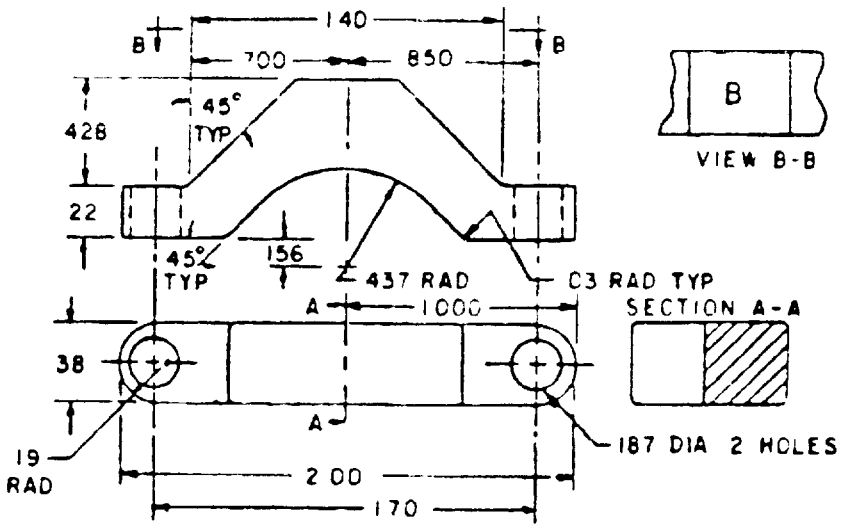


INCHES	MM
.03	8
.156	3.96
.187	4.75
.19	4.8
.22	5.6
.38	9.7
.428	10.87
.437	11.1
.700	17.78
.850	21.59
1.000	25.40
1.40	35.6
1.70	43.2
2.00	50.8

Configuration B — Insert B

FIGURE 1. Shield, rectangular - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:59Z
Check the source to verify that this is the current version before use.

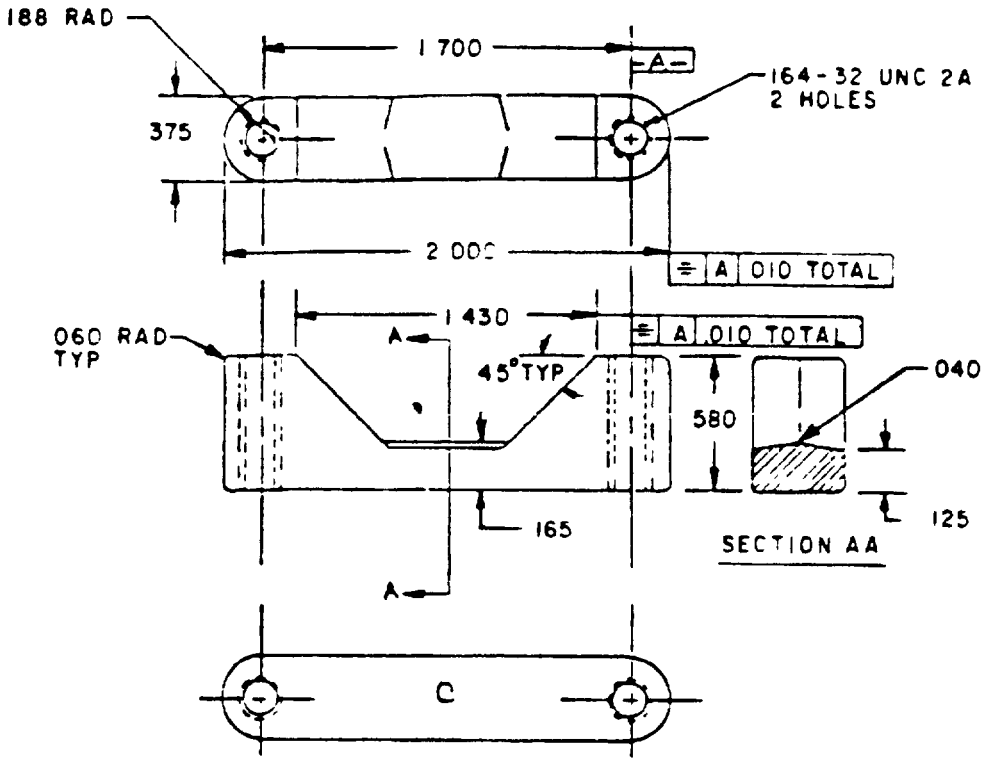

Configuration C — Clamp

INCHES	MM
010	25
.040	1 02
.060	1.52
.125	3 18
.164	4 17
.165	4.19
.188	4 78
.375	9.52
580	14.73
1 430	36.32
1.700	43 18
2.000	50.80

Inserts A	Inserts B	Movable clamp	Typical cable size Cables	C D
		Yes	2SW.-24	1 590 max (40 39)
		Yes	2AU4[illegible]	1 380/1 325 (30 05/33 66)
Yes		Yes	3SU14	1 290/1 200 (32 77/30 48)
	Yes	Yes	MHDF-44	1 000/ 925 (25 40/23 50)
	Yes	Yes	2U-45	870/ 830 (22 10/21 08)

NOTES
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Tolerance shall be ± 005 (0 13 mm) unless otherwise specified All dimensions are for parts after plating
4. Shield assembly (MIL-C-28731/24-0001 or -0002) can be used with connector assemblies M28731/18-0111 and M28731/18-0114.
5. Shield assemblies are supplied with four 138-32, screws for mounting shield to insulator, and a rubber grommet No MS-35489-4 per MIL-G-3036 for placement in clearance hole for actuating hardware shaft Complete unit to be packaged in accordance with MIL-P-116, method 111.
6. Tolerances shall be ± 015 (0.38 mm) unless otherwise specified.
7. Patent Notice Patent No 3,248,686 owned by Elco corporation. The government has a royalty-free license under the above patent for the benefit of manufacturers of the items called for in this specification, either for the government or for use in equipment to be delivered to the government
8. Unthreaded cable inserts are marked with letters "A" or "B", a threaded movable clamp is marked with the letter "C". All three items ("A", "B", "C") are supplied with the shield (unless otherwise specified)
9. For cables less than 750 inch (19 05 mm) O D , use inverted clamp "C" as shown in view A-A.

FIGURE 1. Shield, rectangular - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:59Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration: See figure 1

© Part number M28731/24- (and dash number from table I).

© TABLE I. Dash numbers and dimensions.

Dash number M28731/24	"A" dimension	"B" dimension
-0001	3.895 (98.93)	.650 (16.51)
-0002	3.410 (86.61)	.165 (4.19)

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities
Army - AR, AT, MI
Navy - AS
Air Force - 11, 17, 99
DLA - ES

User activities
Army - AL, AV, ME
Navy - MC, OS
Air Force - 19

Agent
DLA - ES

Preparing activity
Navy - EC

(Project 5935-3345-20)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:59Z
Check the source to verify that this is the current version before use.