
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CONTACT, FORK TYPE, WRAPPOST, REMOVABLE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-28731.

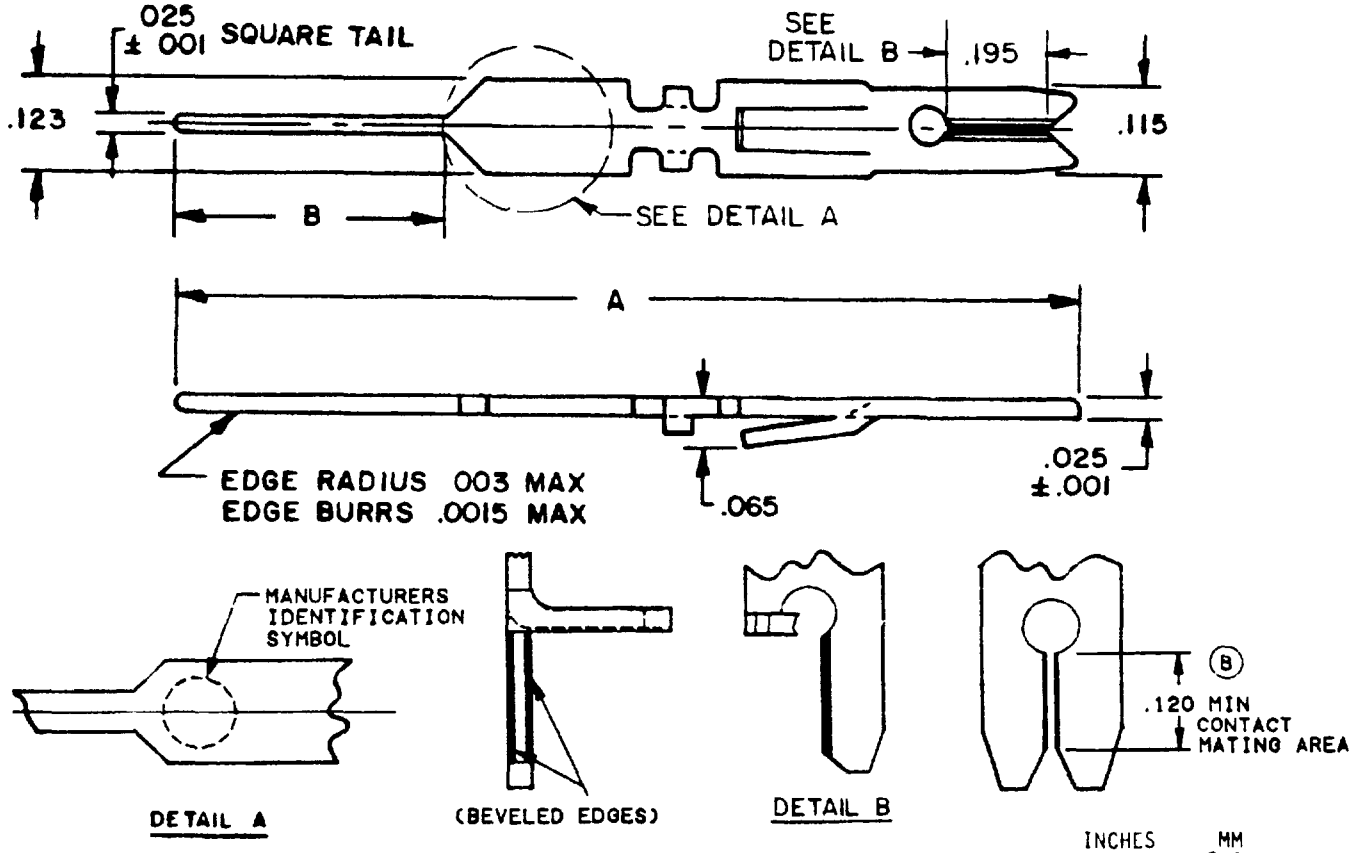

MANUFACTURERS IDENTIFICATION SYMBOL SHALL BE IMPRINTED APPROXIMATELY AS SHOWN.

INCHES	MM
.001	0.03
.0015	0.038
.003	0.08
.025	0.64
.065	1.65
.115	2.92
.120	3.05
.123	3.12
.195	4.95


NOTES
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.010 (0.25 mm).
4. Contact insertion and removal tools MIL-I-81969/13-01 and MIL-I-81969/11-01.
5. Contacts shall be permanently imprinted with manufacturers symbol for purpose of identifying manufacturers product. (See detail A).

FIGURE 1. Contact.

(B) denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:59Z
Check the source to verify that this is the current version before use.

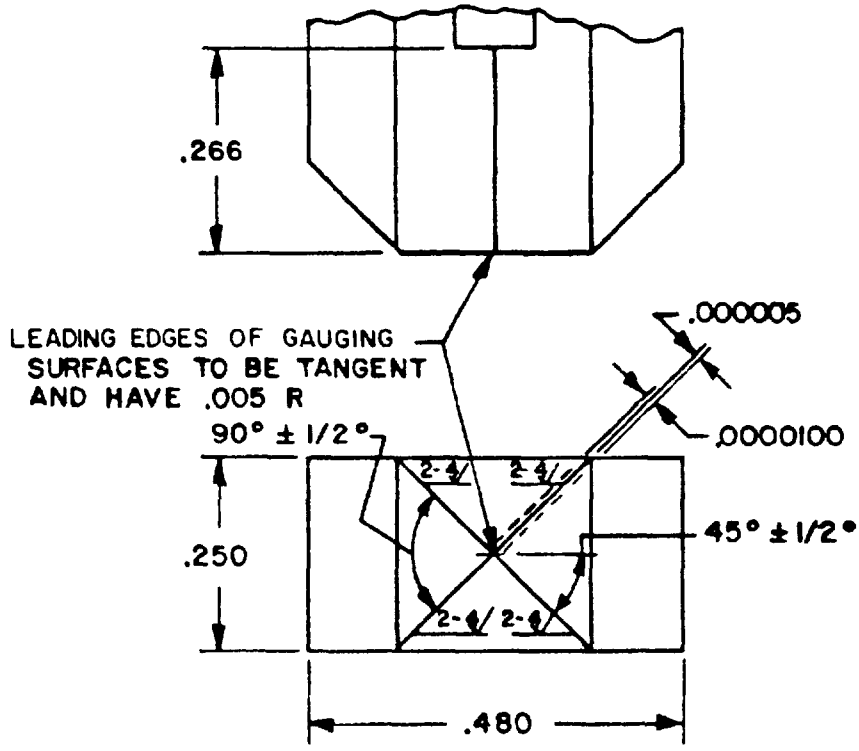

INCHES	MM
.000005	0.00012
.0000100	0.000254
.005	0.13
.250	6.35
.266	6.76
.480	12.19

FIGURE 2. Gauge tip, test fixture, contact separation force.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:59Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration See figure 1.

Application Contacts are used with mounted connectors having fixed actuating hardware, connectors MIL-C-28731/1 through MIL-C-28731/6 and MIL-C-28731/9 through MIL-C-28731/18. Contacts are not recommended for use on automatic wire wrap application.

Wire size For .025 square wrappost, wire sizes 24, 26, 28 and 30 are recommended (see MIL-STD-1130).

Current rating 3 amperes, 24 AWG wire.

Contact separation forces (see figure 2):

Polished steel gauge from unplated contacts	2 to 10 ounces.
Plated gold over nickel contacts	2 to 16 ounces.

Contact mating area Contacts may be supplied with either overall plating or localized finish. For localized finish contacts the contact mating area shall be in accordance with detail B and MIL-C-28731 and the tail area (dimension B of figure 1) shall be in accordance with MIL-C-28731.

Part number MIL-M-28731/26- (dash number from table I).

TABLE I. Dash numbers and dimensions.

Dash number	Dimensions	
	"A" ±.015 (0.380)	"B" ±.008 (0.200)
0001	1.400 (35.56)	0.580 (14.73)
0002	0.990 (25.14)	0.170 (4.32)

Custodians
Army - CR
Navy - EC
Air Force - 85

Review activities
Army - AR, AT, MI
Navy - AS
Air Force - 11, 17, 99
DLA - ES

Preparing activity
Navy - EC

(Project 5935-3488-18)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:59Z
Check the source to verify that this is the current version before use.