INCH-POUND


MIL-DTL-28731/26C
w/AMENDMENT 1
29 October 2018
SUPERSEDING
MIL-DTL-28731/26C
15 March 2004

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CONTACT, FORK TYPE, WRAPPOST, REMOVABLE

This specification is approved for use by all Departments
and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-28731.

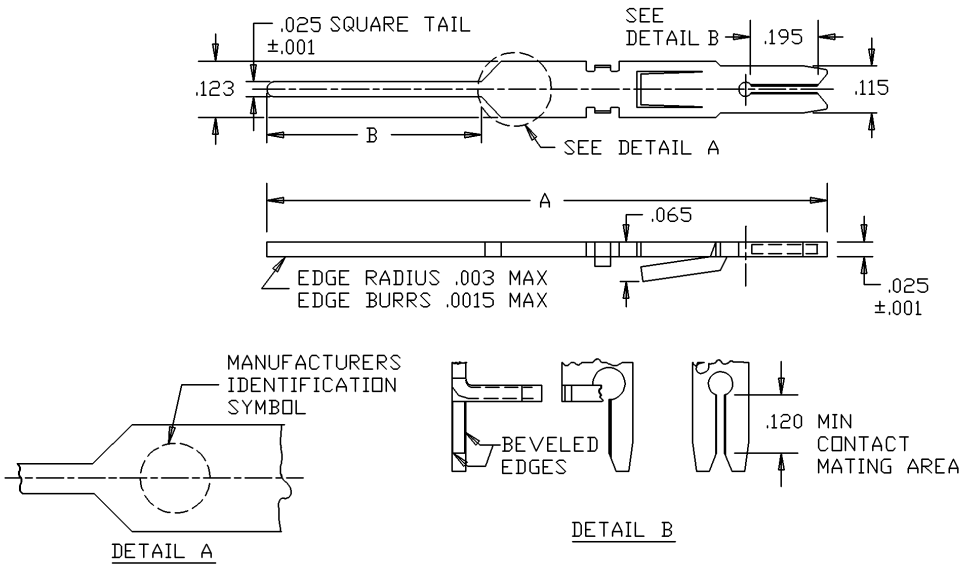

MANUFACTURES IDENTIFICATION SYMBOL SHELL BE IMPRINTED APROXIMATELY AS SHOWN

Inches	mm
.001	0.03
.0015	0.038
.003	0.08
.025	0.64
.065	1.65
.115	2.92
.120	3.05
.123	3.12
.195	4.95


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ± .010 (0.25 mm).
4. Contact insertion and removal tools SAE-AS81969/13-01 and SAE-AS81969/11-01.
5. Contacts shall be permanently imprinted with manufacturers symbol for purpose of identifying manufacturers product (see detail A).

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:59Z
Check the source to verify that this is the current version before use.

FIGURE 1. Contact.

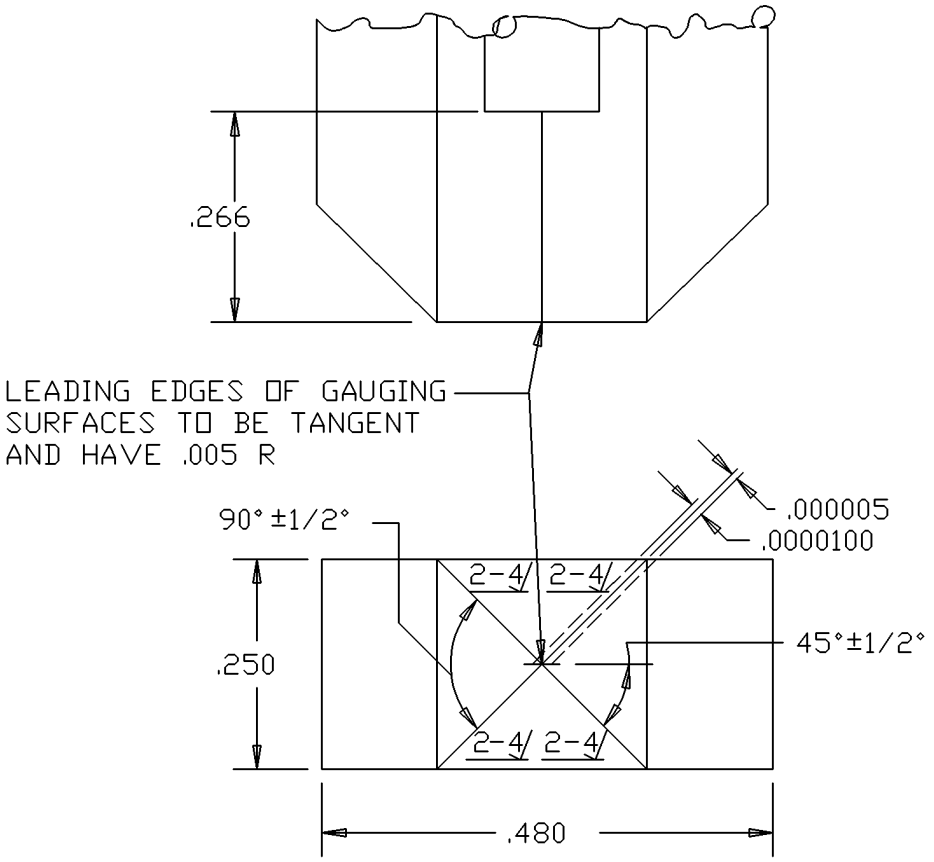

Inches	mm
.000005	0.00012
.0000100	0.000254
.005	0.13
.250	6.35
.266	6.76
.480	12.19

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:59Z
Check the source to verify that this is the current version before use.

FIGURE 2. Gauge tip, test fixture, contact separation force.

REQUIREMENTS

Dimensions and configurations: See figure 1and 2.

Application: Contacts are used with mounted connectors having fixed actuating hardware, connectors MIL-DTL-28731/3 and MIL-DTL-28731/4 and MIL-DTL-28731/9 through MIL-DTL-28731/18. Contacts are not recommended for use on automatic wire wrap application.

Wire size: For .025 square wrappost, wire sizes 24, 26, 28 and 30 are recommended for wrappost geometry (see MIL-DTL-28731).

Current rating: 3 amperes, 24 AWG wire.

Contact separation forces: See figure 2.

Polished steel gauge from unplated contacts: 2 to 10 ounces.
Plated gold over nickel contacts: 2 to 16 ounces.

Contact mating area: Contacts may be supplied with either overall plating or localized finish. For localized finish contacts the contact mating area shall be in accordance with detail B and MIL-DTL-28731 and the tail area (dimension B on figure 1) shall be in accordance with MIL-DTL-28731.

Part or Identifying Number (PIN): M28731 – (dash number from table I).

TABLE I. Dash numbers and dimension.

Dash number	Dimension	
	"A" ± .015 (0.380)	"B" ± .008 (0.200)
0001	1.400 (35.56)	0.580 (14.73)
0002	0.990 (25.14)	0.179 (4.32)

Amendment Notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:59Z
Check the source to verify that this is the current version before use.

Reference documents. In addition to MIL-DTL-28731, this document references the following:

MIL-DTL-28731/3	MIL-DTL-28731/10	MIL-DTL-28731/15
MIL-DTL-28731/4	MIL-DTL-28731/11	MIL-DTL-28731/16
MIL-DTL-28731/9	MIL-DTL-28731/12	MIL-DTL-28731/17
	MIL-DTL-28731/13	MIL-DTL-28731/18
	MIL-DTL-28731/14	

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2018-149)

Review activities:
Army - AR, AT, AV, CR4, MI
Navy - AS, MC, OS
Air Force -19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:59Z
Check the source to verify that this is the current version before use.