INCH - POUNDS

MIL-DTL-28731/32C
25 May 2012
SUPERSEDING
MIL-C-28731/32B
4 June 1985

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, INSERT (INSULATOR), FEMALE RECTANGULAR, POLARIZED, CENTER SCREW LOCK, FOR 117 REMOVABLE TYPE CONTACTS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-28731.


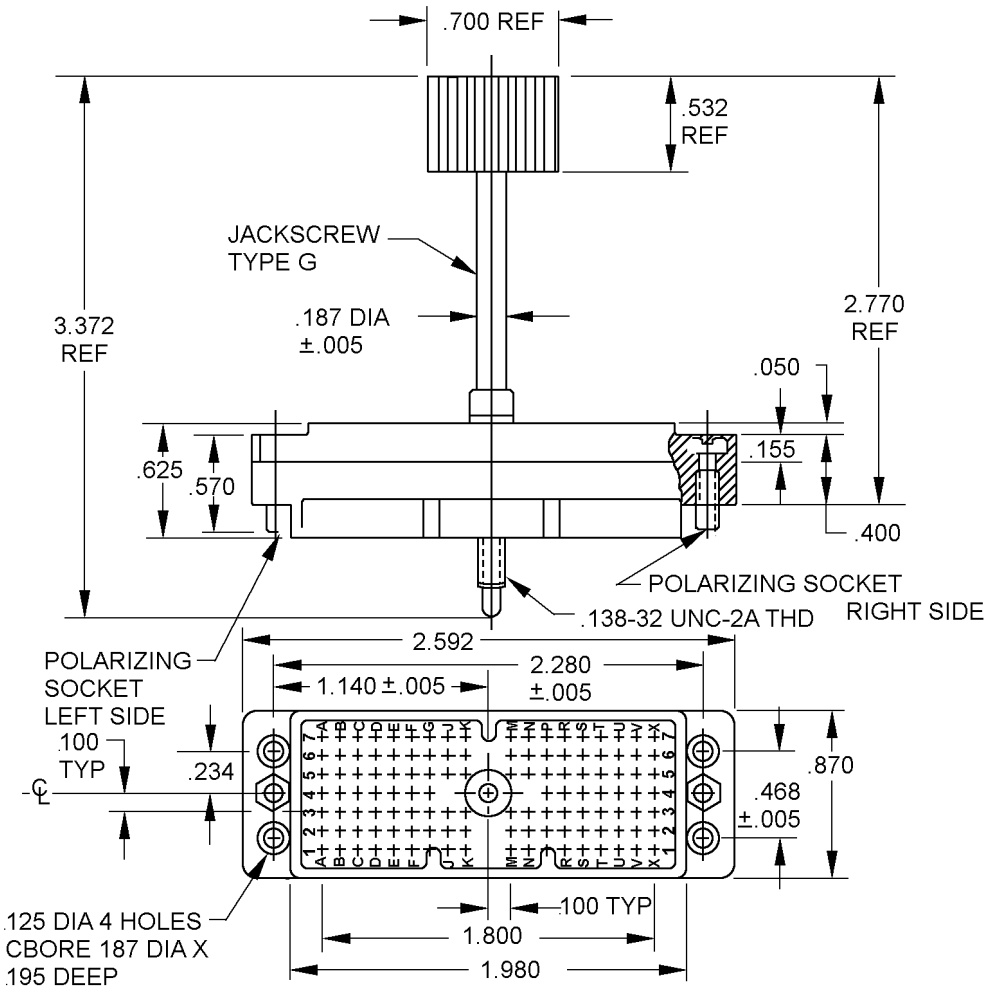


FIGURE 1. Connector, female rectangular.


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:01Z
Check the source to verify that this is the current version before use.

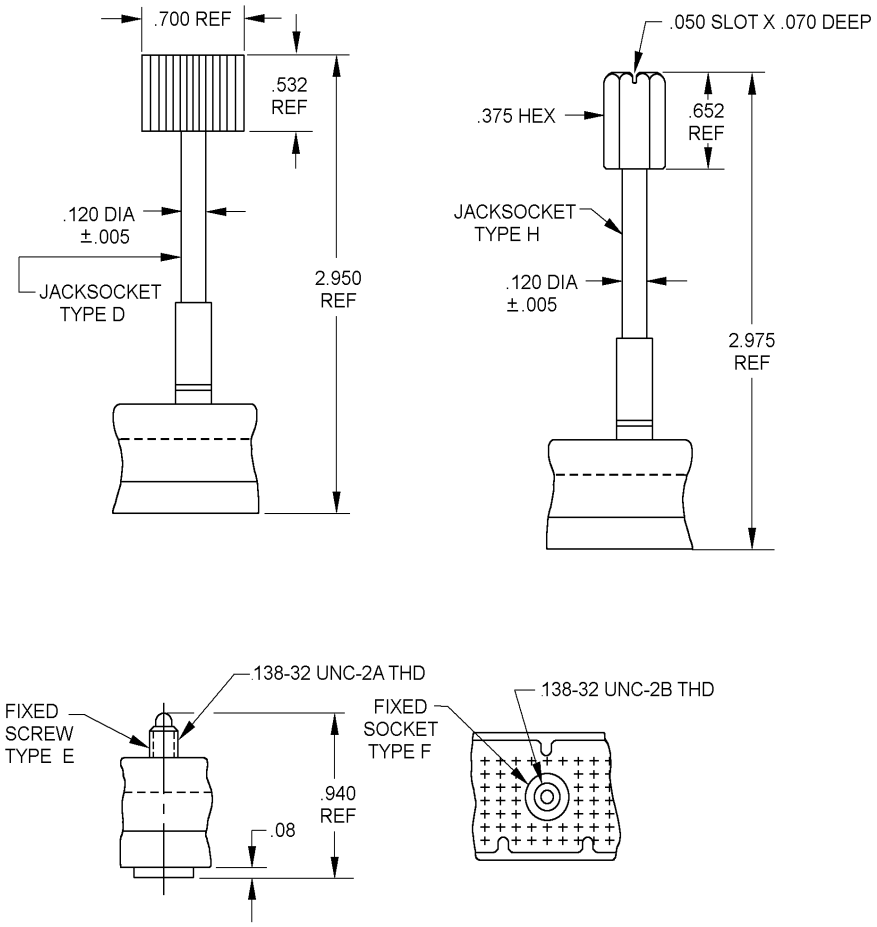

Inches	mm	Inches	mm
.005	0.13	.625	15.88
.050	1.27	.652	16.56
.07	1.8	.700	17.78
.100	2.54	.870	22.10
.120	3.05	.940	23.88
.138	3.51	1.140	28.96
.155	3.94	1.800	45.72
.187	4.75	1.980	50.29
.195	4.95	2.280	57.91
.234	5.94	2.592	65.84
.375	9.52	2.950	74.93
.400	10.16	2.975	75.56
.468	11.89	3.372	85.65
.532	13.51		

FIGURE 1. Connector, female rectangular – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:01Z
Check the source to verify that this is the current version before use.

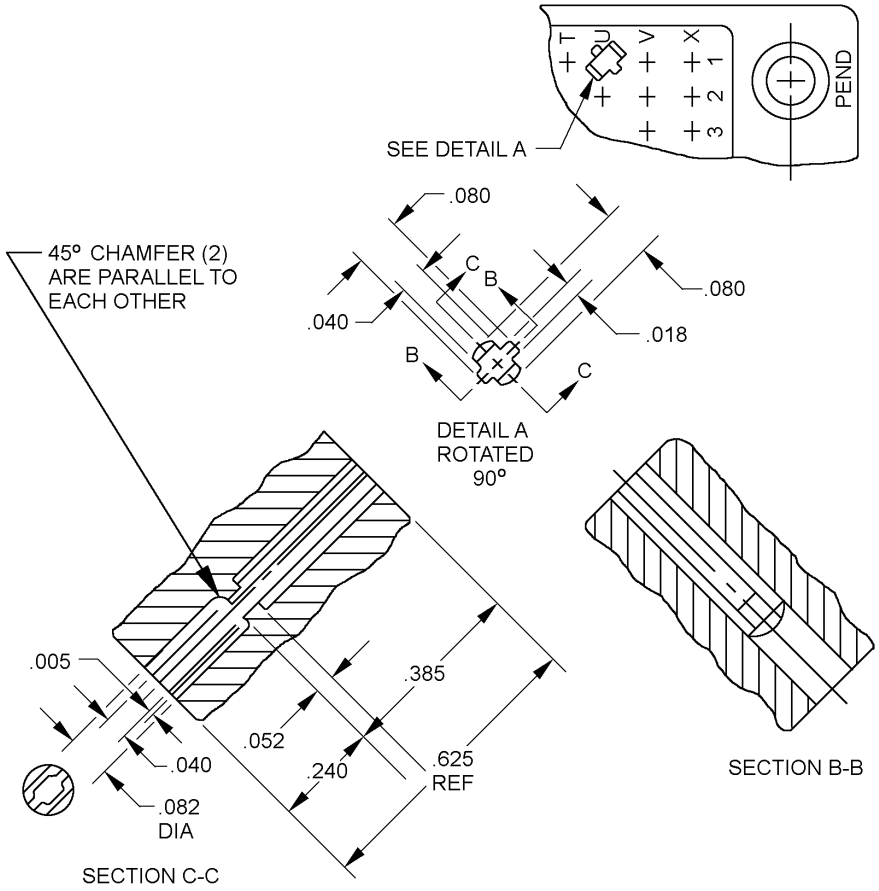



Configuration A - Contact hole detail

Inches	mm
.005	0.13
.018	0.46
.040	1.02
.052	1.32
.080	2.03
.082	2.08
.240	6.10
.385	9.78
.625	15.88

FIGURE 1. Connector, female rectangular – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:01Z
Check the source to verify that this is the current version before use.

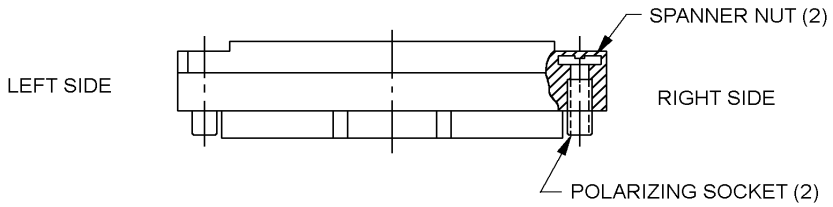

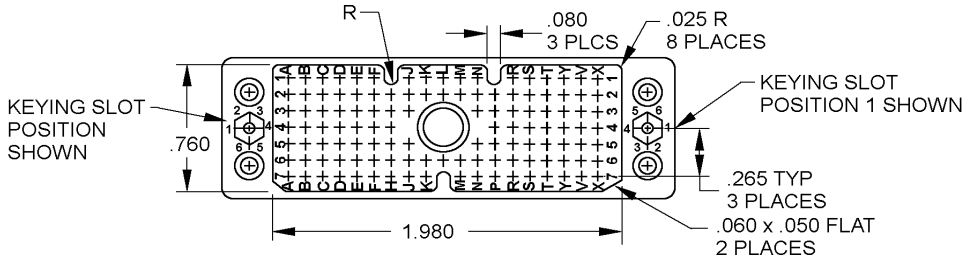


POLARIZING KEY MATING CODE	
R (FEMALE) Position	P (MALE) Position
1	4
2	5
3	6
4	1
5	2
6	3

POLARIZING POSITION CHANGE

Keying position on both polarizing sockets can be rotated to desired position by loosening spanner nut (counter-clockwise), resetting socket in one of six positions then retightening spanner nut (clockwise).

NOTE: Overtightening of spanner nut can fracture connector. Spanner keying wrench shown below.

Inches	mm
.025	0.63
.03	0.8
.050	1.27
.055	1.40
.060	1.52
.080	2.05
.140	3.56
.250	6.35
.265	6.73
.760	19.30
1.00	25.4
1.37	34.8
1.980	50.49

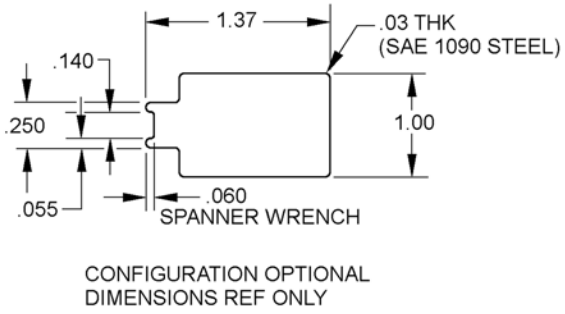

Configuration B – Connector polarization guide (layout)

FIGURE 1. Connector, female, rectangular – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:01Z
Check the source to verify that this is the current version before use.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Tolerances between any two contact centers shall be ± .004 (0.10 mm).
4. Flatness, squareness, and parallelism shall be within dimensional tolerances.
5. Contact hole details shall be in accordance with configuration B.
6. Mating connector information:
   M28731/32-0001 mate with M28731/31-0003 and M28731/31-0005.
   M28731/32-0002 mate with M28731/31-0004 and M28731/31-0006.
   M28731/32-0003 and M28731/32-0005 mate with M28731/31-0001.
   M28731/32-0004 and M28731/32-0006 mate with M28731/31-0002.
7. Polarization information: Polarization sockets are provided for indexing to preclude intermixing of adjacent connectors. By using a standard type spanner wrench, polarization sockets can be rotated to desired position. For parts supplied directly to the government, polarization will be in the 1-1 position. For other polarization positions, see connector polarization guide configuration A (see marking, note 13d). For direct government acquisition a tool is supplied in the unit package for polarization socket adjustment.
8. Contact and terminal designations: Contacts and terminals shall be designated on the insulator using letters in the location shown on figure 1.
9. Tolerance shall be ± .010 (0.25 mm) unless otherwise specified.
10. For direct government acquisition crimp contacts M28731/35-0001 (see table I) are furnished in a plastic bag in each unit package (see marking, note 13a).
11. For direct government acquisition wrappost contacts are M28731/36-0001 (see table I) and are factory installed in connector body (see marking, note 13a).
12. Marking:
    a. Connectors supplied directly to the government shall be marked with the military Part or Identifying Number (PIN) (see table I). Example: M28731/32-0001.
    b. Connectors supplied with contacts to government end users shall be marked with the military PIN (see table I). Example: M28731/31-0001.
    c. Connectors supplied without contacts to government end users shall be marked as follows: Example: M28731/31E (screw type or socket type from table I). The user shall complete the remaining portion of the military PIN as shown in table I based upon contact type he assembles. Example: M28731/32E-0004.
    d. Polarization position marking is not required unless otherwise specified. When required, polarization marking shall be in accordance with the connector polarization guide (see configuration B). The marking shall appear following the PIN.
13. Applicable contact insertion and removal tools:
    Insertion - MIL-I-81969/5-01
    Removal - MIL-I-81969/4-02
14. Rectangular shields: Shall conform to MIL-DTL-28731/19, PIN M28731/19-0007 through M28731/19-0010, M28731/19-0017, and M28731/19-0018 for type A and B hardware.
15. Recommended hardware (not furnish) for panel mounting: (Four) .112-40-UNC-2A (length to suit) bolts with No. 4 washer and mating nut.
16. Rectangular shield for connector M28731/32-007 shall conform to MIL-DTL-28731.
    PIN: M28731/38-001 must be ordered separately.

FIGURE 1. Connector, female rectangular – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:01Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Mating and unmating forces (torque): 120 inch-ounces, maximum.

Dielectric withstanding voltage: 1,000 volts rms (sea level).

Mechanical shock (specified pulse): Applicable.

Contact retention: 6 pounds.

Contact separation force: 1 ounce, minimum.

Contact current rating: 5 amperes, 22 AWG wire.

PIN: See table I.

TABLE I. PIN information.

Military PIN	Actuating hardware	Polarizing socket position		Contact type
		Left side	Right side	
M28731/32-0001	Jackscrew type G	1	1	Crimp, MIL-DTL-28731/35
M28731/32-0002	Jack socket type D	1	1	Crimp, MIL-DTL-28731/35
M28731/32-0003	Fixed socket type F	1	1	Crimp, MIL-DTL-28731/35
M28731/32-0004	Fixed screw type E	1	1	Crimp, MIL-DTL-28731/35
M28731/32-0005	Fixed socket type F	1	1	Wrappost, MIL-DTL-28731/36
M28731/32-0006	Fixed screw type E	1	1	Wrappost, MIL-DTL-28731/36
M28731/32-000	Jack socket type H	1	1	Crimp, MIL-DTL-28731/35

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue, due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-28731, this document references the following:

MIL-DTL-28731/19
MIL DTL-28731/35
MIL-DTL-28731/36

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:01Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy – EC
Air Force – 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2012-068)

Review activities:
Army – AR, AT, AV, CR4, MI
Navy – AS, MC, OS
Air Force – 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:01Z
Check the source to verify that this is the current version before use.