[INCH-POUND]
A-A-2952
December 29, 1995
SUPERSEDING
W-C-421H
November 2, 1987

COMMERCIAL ITEM DESCRIPTION

# CLEANER, VACUUM, ELECTRIC (HOUSEHOLD/COMMERCIAL)

The General Services Administration has authorized the use of this Commercial Item Description (CID) for all federal agencies.

## 1. SCOPE

1.1 Scope. This CID covers electric motor-powered canister, upright, and combination vacuum cleaners for household and commercial use for dry pickup only. The cleaners shall be designed to operate on a single phase power source of either 120 volts ac, 60 Hz, or 220 volts ac, 50 Hz as specified (see 7.2).

## 2. CLASSIFICATION

2.1 Classification. The vacuum cleaners shall be of the following types, classes, and sizes (see 7.2).

Type I - Canister.
  Class A - Household.
  Class B - Commercial.

Type II - Upright.
  Class A - Household.
  Class B - Small Commercial.
  Class C - Large Commercial.
    Size 1 - 12-inch (304 mm) minimum width agitator.
    Size 2 - 16-inch (406 mm) minimum width agitator.

Type III - Combination.
  Class A - Household.

## 3. SALIENT CHARACTERISTICS

3.1 Standard Commercial Product. The vacuum cleaner shall be the manufacturer's standard commercial product except for any changes necessary for compliance with this CID.

3.2 UL conformance. Vacuum cleaners shall meet the applicable requirements of UL 1017. Evidence of conformance with UL standards shall be a UL label or listing mark, or a certified test report (based on tests conducted within the past two years) from an independent testing laboratory acceptable to the Government, indicating the vacuum cleaner has passed all applicable tests.

3.3 General. Each cleaner shall be complete, lubricated, and ready to operate (minor assembly is permitted). The design shall be simple in construction, shall permit easy accessibility to component parts for cleaning, inspection, adjustment, or replacement, and shall provide reliable operation. Similar component parts and assemblies of identical model number cleaners shall be fully interchangeable. Interchangeability shall not require alteration or modification.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: General Services Administration, Engineering Group (7FXEE), 819 Taylor St., Fort Worth, TX 76102.

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

FSC 7910

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:27Z
Check the source to verify that this is the current version before use.

3.3.1 Type I (Canister). Each type I cleaner shall consist of a housing, handle or grip, vacuum producer assembly, filter assembly, switch, cord assembly, and tools and attachments as specified.

3.3.2 Type II (Upright). Each type II cleaner shall consist of a housing and handle assembly, vacuum producer assembly, nozzle and agitator assembly, filter assembly, switch, cord assembly, and tools and attachments as specified.

3.3.3 Type III (Combination). Each type III cleaner shall consist of the type I components plus a powered agitator assembly to be affixed to the end of the hose and wand assembly. The cleaner shall conform to the requirements for type I, class A, and the agitator shall conform to the applicable requirements of type II, class A.

3.4 Power switch. The cleaner shall be provided with a quick make-and-break type power switch.

3.5 Power cord. The power cord assembly shall have three conductors and a three-prong attachment plug except in double-insulated cleaners, wherein a power cord assembly having two conductors and a two-prong attachment plug shall be permitted. For class A cleaners the power cord shall have a minimum length of 20 feet (6.10 m). For class B and C cleaners, the power cord shall have a minimum length of 30 feet (9.15 m). The cord length shall be measured from the point of exit from the machine to the point of entry into the attachment plug.

3.6 Power cord storage. Each cleaner shall be provided with a means for coiling, wrapping, or otherwise storing the power cord when the cleaner is not in use.

3.7 Filter Assembly. The filter assembly shall filter particulate matter 1 µm and larger and shall retain this matter for easy disposal. No ingested unfiltered air shall be exhausted from the cleaner. Cleaners using disposable dust bags shall be furnished with a minimum of two (2) dust bags. Types I and III cleaners shall have a minimum filter capacity of 200 cubic inches (3.28 L), employing disposable dust bags for class A cleaners, and either disposable or nondisposable dust bags for class B cleaners. The dust bag shall be secured to the cleaner outlet in such a manner that is dust tight and can be expected to hold the bag in place during normal use with the bag empty and with the bag filled. There shall be no sharp projections or edges in the area of dust bag expansion. Type II, class A cleaners shall employ disposable dust bags having a minimum capacity of 200 cubic inches (3.28 L), and type II classes B and C cleaners shall employ either disposable or nondisposable dust bags having a minimum capacity of 500 cubic inches (8.19 L). All connections between the nozzle and the bag shall be dust tight. The bag may be enclosed in a shroud of plastic or other suitable synthetic material.

3.8 Housing. The housing of type I and III cleaners shall contain all components of the cleaner except for the accessories. The housing shall be equipped with wheels or casters. A dolly with provisions for attachment to the cleaner may be acceptable if the housing is not wheeled. The housing shall be designed such that the cleaner will operate satisfactorily when placed on a stair tread. Hand portability shall be provided by a handle or handles that are an integral part of, or are securely fastened to, the housing. The housing of type II cleaners shall be of durable construction and shall contain the running gear to provide the mobility, the vacuum producer assembly, and an agitator. The frame shall be of rugged construction and shall be enclosed in a shroud of metal or impact resistant synthetic material. Wheels for type II classes B and C cleaners shall be either bearing-supported and permanently lubricated or polymeric self-lubricating. All wheels shall be nonmarking.

3.9 Nozzle and agitator assembly. For type II cleaners, the nozzle shall be of rugged metal or polymeric construction, and shall effectively funnel litter from the surface being cleaned to the suction channel. The nozzle shall automatically



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:27Z
Check the source to verify that this is the current version before use.

adjust or shall be adjustable in height to compensate for varying pile depths. The agitator shall be provided with high quality bristles and may employ beaters. The bristles or the entire agitator shall be easily replaceable on class B and C cleaners. When tools and attachments are employed with the type II cleaners, a means shall be provided to automatically or manually uncouple the agitator. Manual uncoupling shall not require disassembly. Type III cleaners shall include an agitator, powered by an independent motor contained in the nozzle housing. The motor shall be rated a minimum of 1/10 hp (74.6 W) and shall operate from the same power source provided by the power connection for the cleaner. The power cord for the agitator shall be securely clamped to or molded into the hose and wand assembly. The power switch for the agitator may be located on the grip.

3.10 Handle. The handles of type II cleaners shall be of adequate strength and rigidity to permit elevating and rotating the agitator assembly about the rear wheels without detectable flexure. The handle shall pivot smoothly from the vertical to a near-horizontal position. A detent or "park" position shall be provided to hold the handle in the vertical position for storage. Other detents or "work" positions are permitted. Provision for cord storage shall be provided on the handle. The power switch may be located on the handle.

3.11 Attachments.

3.11.1 General. All cleaners shall be furnished with one bare floor tool, one crevice tool, one upholstery nozzle, and one brush. Type I and III cleaners shall also be furnished with one carpet tool. All cleaners shall be furnished with one 42-inch (1067 mm) minimum length wand assembly, and one 1-1/4-inch (31.7 mm) minimum inside diameter, 120-inch (3050 mm) minimum length hose assembly.

3.11.2 Tool construction. The attachments for all cleaners shall be fabricated from a nonferrous alloy or an impact-resistant synthetic material. Metal tools shall be suitably plated or finished to resist corrosion and prevent marking. All edges shall be rounded and smooth.

3.11.3 Hose construction. The hose shall be fabricated from nonmarking materials impervious to attack from common cleaning solutions. A swivel coupling shall be provided on the hose end attaching to the cleaner. The hose shall be able to withstand a minimum compressive load of 150 lb (667 N) applied to any portion of the hose no closer than 12 inches (305 mm) from any fitting by means of parallel flat surfaces having lengths of not more than 3 inches (76.2 mm) parallel to the axis of the hose for not less than 2 minutes. The compressive load shall cause no rupture of any portion of the hose and the resulting hose diameter shall not differ more than 1/4 inch (6.35 mm) from the diameter prior to the compressive load.

3.11.4 Couplings. The engaged wand, hose, and tools shall be able to withstand a tensile force of 25 lb (111 N) for 2 minutes at each coupling without separation. Couplings shall engage and release satisfactorily before and after being subjected to the 25-lb (111 N) tensile force.

3.12 Performance.

3.12.1 Noise. The maximum noise generated by the cleaners shall be 85 dbA when tested in accordance with ASTM F1334.

3.12.2 Continuous duty. The motors for class A and C cleaners shall be rated for 1 hour, varying duty. The motors for class B cleaners shall be rated for continuous duty. Continuous duty is defined as constant operation for an 8-hour work day. As evidence of the continuous duty capability, class B cleaners shall be capable of withstanding a continuous 10-hour run with the orifice wide open. All lubrication points except sealed bearings shall be visually checked after this run. The lubricant shall be visually examined and shall not contain any metallic particles and lubricant quantity shall be ample. Evidence of galling or



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:27Z
Check the source to verify that this is the current version before use.

similar deficiency or lack of lubrication shall be cause for rejection. The commutator(s) shall be visually examined. There shall be no evidence of burning or pitting.

3.12.3 Vacuum producer water lift. When tested in accordance with ASTM F558, the vacuum producer shall perform according to values listed in table 1.

TABLE 1

VACUUM PRODUCER WATER LIFT

| Vacuum Cleaner Type | Sealed Water Lift through a 3/4 inch (19.0 mm) Orifice (inches) | Sealed Water Lift through a 1-1/4 inch (31.7 mm) Orifice (inches) |
|---|---|---|
| Type I, Class A | 25 (635 mm) | 5 (127 mm) |
| Type I, Class B | 35 (889 mm) | 9 (229 mm) |
| Type II | 10 (254 mm) | 4 (102 mm) |
| Type III | 25 (635 mm) | 5 (127 mm) |

3.13 Manuals. Each cleaner shall be furnished with a manual of operating instructions. The class B and C cleaners shall also be furnished with a handbook of maintenance instructions with an Illustrated Parts Breakdown (IPB). The IPB shall identify all components by part number to the lowest repair level.

3.14 Workmanship. The cleaner and all accessories shall be constructed, assembled, and finished in a manner to assure good quality equipment of a neat general appearance and free from imperfections which may affect durability, serviceability, and appearance.

3.15 Measurement system. The values stated in inch-pound units are to be regarded as the standard. The metric values stated in parentheses are provided to an accuracy of three significant digits and are for informational purposes only.

3.16 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, providing they fall within the tolerances specified and all other requirements of this document are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable.

3.17 Commercial item. The use of the term "commercial item" in this document does not imply that any item or items offered are not required to conform with all requirements specified herein.

4. REGULATORY REQUIREMENTS

4.1 Regulatory requirements. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. QUALITY ASSURANCE PROVISIONS

5.1 Contractor Certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this CID, and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices, and is the same product offered for sale in the commercial marketplace. The government reserves the right to require proof of such conformance prior to first delivery



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:27Z
Check the source to verify that this is the current version before use.

and thereafter as may be otherwise provided for under the provisions of the contract.

6. PACKAGING

6.1 Packaging. Preservation, packing, and marking shall be as specified in the contract or order.

7. NOTES

7.1 Referenced Documents. The documents referenced in this CID shall be the issues in effect on the date of issuance of the invitation for bids or request for proposals unless otherwise specified. The documents form a part of this CID to the extent specified. In the event of a conflict between this CID and the documents referenced herein, this CID shall take precedence.

American Society for Testing and Materials Standards:

ASTM F1334 - Standard Test Method for Determining Sound Power Level of Vacuum Cleaners.

Application for copies of ASTM standards should be addressed to the American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.

Underwriters Laboratories Inc., Standards:


UL 1017 - Safety Vacuum Cleaners and Blower Cleaners.

Application for copies of UL standards should be addressed to Underwriters Laboratories Inc., Publication Stock, 333 Pfingsten Road, Northbrook, IL 60062.

7.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents (if applicable).

a. Title, number, and date of this CID.
b. Voltage (see 1.1).
c. Type, class, and size (see 2.1).
d. Preservation, packing, and marking desired.

7.3 Part Numbering. The following part identification numbering procedure is for government purposes and does not constitute a requirement for the contractor.

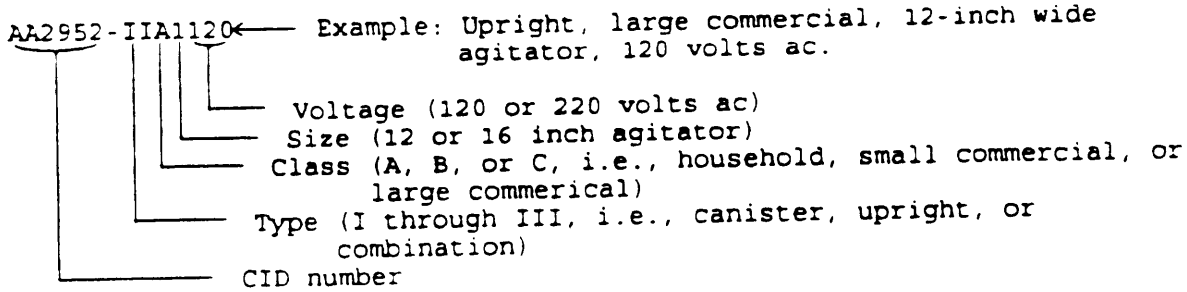




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:27Z
Check the source to verify that this is the current version before use.

7.4 National Stock Numbers (NSNs). The following is a list of NSNs assigned which correspond to this CID. The list may not be indicative of all possible NSNs associated with the CID.

| NSN | Type | Class | Size | Voltage | |
|---|---|---|---|---|---|
| 7910-00-550-9123 | I | A | N/A | 120 | |
| 7910-00-479-6684 | I | B | N/A | 120 | |
| 7910-00-550-9124 | II | A | N/A | 120 | w/accessories |
| 7910-00-550-9125 | II | A | N/A | 120 | |
| 7910-00-720-5536 | II | B | N/A | 120 | |
| 7910-00-468-4197 | II | C | 1 | 120 | |
| 7910-01-154-1151 | II | C | 2 | 120 | |
| 7910-01-158-6628 | III | A | N/A | 220 | |

MILITARY INTERESTS:

Preparing Activity:
GSA-FSS

Custodians
Air Force - 99

Review Activities
Air Force - 84



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:27Z
Check the source to verify that this is the current version before use.