[Metric]
A-A-3005A
April 29, 1997
Superseding
A-A-3005
February 28, 1997

COMMERCIAL ITEM DESCRIPTION
FRAME, PICTURE
(WOOD)

The General Services Administration has authorized the use of this commercial item description by all Federal Agencies.

1. **Scope:** This Commercial Item Description covers requirements for wood picture frames.

2. **Classification:**

Type:	I.	Wall Mounted
	II.	Free Standing with Easel Support
Style:	A.	Back Finish
	B	Walnut Vinyl Covering
	C.	Walnut Stain Finish
	D.	Stain or Paint Finish
	E.	Ribbed Gold
	F.	Oak (Red)
	G.	Custom

3. **Salient Characteristics.**

3.1 Materials. All materials used shall be, as specified. The frames shall be free from defects which may affect the serviceability or appearance of the finished product and shall be in a accordance with Table I as specified in the contract or ordering document.

3.1.2 Wood. Wood for the molding shall be any domestic (grown in the United States) species, dried to a moisture content from 5 to 9 percent. The wood shall be smooth and free from defects, except that discoloration that will not affect the finished appearance will be permitted.

3.1.3 Glass. The glass used shall be in accordance with ASTM C 1036-91, Type I, Class 1, Quality g1, g2, g4, or g5, with a thickness range of 2.16 to 2.65 mm (0.085 to 0.101 inch) single strength. The gap between the glass and the frame shall not be more than 3.8 mm (0.150 inch).

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to General Services Administration, Federal Supply Service, Engineering Branch, 26 Federal Plaza, New York, NY 10278.

FSC 7105

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:28Z
Check the source to verify that this is the current version before use.

3.1 4 **Adhesive.** The adhesive that is used for the finger joints shall be any adhesive that will develop an average block shear strength of not less the 19,000 kilopascals (2,800 pounds psi) when tested in accordance with ASTM D 905-94.

3.1.5 **Paperboard.**

3.1.5.1 **Mat Board.** Boards for mats in style B and C frames shall be .635 ± 0.051 mm ± (0.025 ± .002 inch) thick, with a white matte finish on one side. Boards for mats in style D, E, F and G frames shall have a thickness of 1.321 ± 0.076 mm (.052 ± .003 inch) thick and shall be white or cream colored unless otherwise specified in the contract or ordering document.

3.1.5.2 **Binder Board.**

3.1.5.2.1 **Type I.** Binder board that is used for the back shall have a thickness of 1.27 ± 0.076 mm (.050 ± .003 inch) for all styles.

3.1.5.2.2 **Type II.** Binder board that is used for the back shall have a minimum thickness of 1.42 mm (.056 inch).

3.2 **Construction.**

3.2.1 **Frame.** The frame shall have mitered butt joints at the corners. Any gap shall be less than 0.397 mm (1/64 inch) wide. The overlap at the miter shall not exceed 0.56 mm (0.022 inch). Glass as specified in paragraph 3.1.3 shall fit within the style A frame. The gap between the glass and frame shall be not more than 3.810 mm (0.150 inch).

3.2.1.1 Style A frame joints shall be secured with two 19.050 mm (3/4 inch) long leg staples, clamp nails, or similarly designed metal splines driven into the sides of each corner. Staples, nails, or splines shall be flush ± 0.40 mm.

3.2.1.2 Style B, C, D, E, F, and G frame joints shall be secured by two, 1 inch long staples, clamp nails, or similarly designed metal splines driven into the sides of each corner. Alternatively, style D, E, F, and G frame joints shall be secured with two V-nails or one corrugated staple driven into the back of each corner. The staples, nails or splines driven through the sides shall blend with the frame finish.

3.2.2 **Hangar Devices.** used shall securely hold the binder board, mat board, and easel back, if any. There shall be a minimum of one holding device per side for every a52.4 mm (6 inches) of length. When an easel back is used, there may be up to one less holding device used per side, as permitted by space.

3.2.2.1 **Sides 14 inches or less.** At least two hangars shall be provided for each frame. Saw tooth hangers shall be attached to the molding back and positioned to permit the frame to be hung level, with either the long or short side on top.

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:28Z
Check the source to verify that this is the currentversion before use.

3.2.2.2 Sides 14 inches or more. Frames with sides longer than 14 inches shall have four hangers provided, with two on one long side and two on the short side. Hangers shall not be visible from the front of the frame when in use. Alternately, four ring style hangers may be attached to the back. The ring style hangers shall be positioned not less than 11 mm from the edges, to permit the frame to be hung with either the long or short side on the top. Hanger wire or cord shall be provided with ring style hangers. Wire or cord shall not show when the frame is in use.

3.2.3 Easel Back. All Type II frames shall be provided with an easel back which will be designed to allow the frame to stand with either the long or short side on top, at the user's option. They will also be supplied with one hangar so that the hangar can be attached to permit either the long side or short side on the top. Four pieces of Velcro will also be supplied, for hanging on office panels. Neither the hangar or the velcro should be seen from the front of the frame, if properly attached.

3.2.4 Molding. The molding shall be constructed of wood as specified in paragraph 3.1.2 and shall be one piece or may be finger joined together with only one line of the joint showing on the face. The species of wood of the mating pieces shall be the same. The finger joints shall be equal in strength to one piece of solid wood. When the frame is finished as specified in paragraph 3.4, the finger joints shall not be visible. See figure 1 for the cross section outline and for descriptive purposes only. Other outlines are acceptable. The overall dimensions of the molding shall have a tolerance of ± 1.59 mm (± 1/16 inch). Styles A, C ,D, E, F and G moldings shall be sealed and coated with at least two coats of enamel or lacquer

3.2.4.1 Style A Molding. The face of style A molding shall be 19.050 mm (3/4 inch) wide by 12.7 mm (1/2 inch) thick minimum. It shall be shaped to receive the glass, display item and back. The face of the molding shall extend at least 4.763 mm (3/16 inch) from the glass and shall overlap the edge of the glass at least 4.763 mm (3/16 inch) but not more than 7.938 mm (5/16 inch).

3.2.4.2 Style B Molding. The face of the style B molding shall be concave and have a raised bead of a half-round bead along the inside edge. The bead shall be 6.350 mm (1/4 inch) in diameter. The width of the molding shall not be less than 34.925 mm (1 3/8 inches) and not more than 38.1 mm (1 1/2 inches). The molding shall be shaped to receive the glass, mat, display item, and back. The face of the molding shall extend not less than 4.763 mm (3/16 inches) from the glass and shall overlap the edge of the glass not less than 4.763 mm (3/16 inch) and not more than 9.525 mm (3/8 inch). The thickness of the molding shall be not less than 12.7 mm (1/2 inch).

3.2.4.3 Style C Molding. The face of the style C molding shall be concave and have a raised bead of a half-round bead along the inside edge. The raised bead shall be 1.588 mm (1/16 inch) in diameter. The width of the molding shall not be less than 34.925 mm (1 3/8 inches) and not more than 38.1 mm (1 1/2 inches). The molding shall be shaped to receive the glass, mat, display item, and back. The face of the molding shall extend not less than 4.763 mm (3/16 inches) from the glass and shall overlap the edge of the glass not less than 4.763 mm (3/16 inch) and not more than 9.525 mm (3/8 inch). The thickness of the molding shall be not less than 12.7 mm (1/2 inch).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:28Z
Check the source to verify that this is the current version before use.

3.2.4.4 Style D Molding. The face and sides of the style D molding shall be as shown in Figure 1. The bead on the inside edge shall be embossed. the width if the molding shall be 19.050 mm (3/4 inch). The thickness of the molding shall be 20.638 mm (13/16 inch). The molding shall be shaped to receive the glass, mat, display item, and back. The face of the molding shall extend not less than 4.763 mm (3/16 inch) from the glass and shall overlap the edge of the glass not less than 4.763 mm (3/16 inch) and not more than 9.525 mm (3/8 inch).

3.2.4.5 Style E Molding. The style E molding shall be approximately as shown in figure 1. The width of the molding shall be 19.050 mm (3/4 inch). The thickness of the molding shall be 20.638 mm (13/16 inch).

3.2.4.6 Style F Molding. The style F molding shall be approximately as shown in figure 1. The width of the molding shall be 19.050 mm (3/4 inch). The thickness of the molding shall be 19.050 mm (3/4 inch).

3.2.4.7 Style G Molding. The style G molding shall be a manufacturer's standard commercial molding profile provided it meets the requirements of paragraph 3.2.4.

3.3 Mats. Styles B, C, and D frames shall be furnished with mats. The material shall conform to the requirements as specified in paragraph 3.1.6.1. The mat sizes shall correspond in length and width to those of the glass. The display area (cut-outs) shall be centered and shall be the sizes as specified in table I. Mats for style D frames shall be bevel cut. When sizes other than those listed in table I are required, the display area (cutouts) shall be as specified in the contract or ordering document.

Table I.
Frame Size and Mat Display Area
(Metric/Inches)

	Frame Size	Display Area
1.	12.7 cm x 17.8 cm (5 in. x 7 in.)	7.6 cm x 12.7 cm (3 in. x 5 in.)
2.	20.3 cm x 25.4 cm (8 in. x 10 in.)	12. 7 cm x 17.8 cm (5 in. x 7 in.)
3.	21.6 cm x 27.9 cm (8 1/2 in. x 11 in.)	12.7 cm x 17.8 cm (5 in. x 7 in.)
4.	22.9 cm x 30.5 cm (9 in. x 12 in.)	17.8 cm x 22.9 cm (7 in. x 9 in.)
5.	25.4 cm x 30.5 cm (10 in. x 12 in.)	17.8 cm x 22.9 cm (7 in. x 9 in.)
6.	25.4 cm x 35.6 cm (10 in. x 14 in.)	20.3 cm x 25.4 cm (8 in. x 10 in.)
7.	27.9 cm x 35.6 cm (11 in. x 14 in.)	20.3 cm x 25.4 cm (8 in. x 10 in.)
8.	27.9 cm x 35.6 cm (11 in. x 14 in.)	25.4 cm x 30.5 cm (10 in. x 12 in.)
9.	35.6 cm x 45.7 cm (14 in. x 18 in.)	22.9 cm x 30.5 cm (9 in. x 12 in.)
10.	40.6 cm x 50.8 cm (16 in. x 20 in.)	30.5 cm x 40.6 cm (12 in. x 16 in.)
11.	45.7 cm x 61.0 cm (18 in. x 24 in.)	35.6 cm x 50.8 cm (14 in. x 20 in.)
12.	50.8 cm x 61.0 cm (20 in. x 24 in.)	40.6 cm x 50.8 cm (16 in. x 20 in.)

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:28Z
Check the source to verify that this is the current version before use.

3.4 Finishing. The style A, C, D, E, F, and G moldings shall be sealed and coated with at least two coats of enamel or lacquer. The color of the finish shall be as specified in paragraphs 3.5.1, 3.5.3, or 3.5.4. The finish shall produce a smooth uniform surface without blisters, wrinkles, pits, runs, tackiness, or orange peel.

3.5 Color.

3.5.1 Style A. The color of the finish shall be black No. 27040 in accordance with Federal Standard No. 595 or normal commercial practice.

3.5.2 Style B. The exposed surfaces of the style B molding, except for the inside bead which will be exposed when the frame is in use, shall have a simulated grain-walnut vinyl film coating permanently adhered thereto. The color of the inside bead shall be gold laminated paper with a polyester coating.

3.5.3 Style C. The color of the finish shall be walnut. The color of the inside bead shall be gold. The bead material shall be hot stamped gold foil.

3.5.4 Style D. The color of the finish shall be gold with foil or walnut, oak, mahogany, or black, as specified in the contract or ordering document.

3.5.5 Style E. The color of the frame shall be gold.

3.5.6 Style F. The frame color shall be the natural red oak color with a clear finish. The color of all oak used in a single frame shall reasonably match in color.

3.5.7 Style G. The frame color shall be as specified in the contract or ordering document.

3.6 Identification Marking. Each frame shall be marked in a plain, permanent and inconspicuous manner with the contractor's name or trademark, contract number, or order number, item stock number, and year of manufacture. This data shall be applied in such a manner as to resist feathering and smearing.

3.7 Frame Size. The frame sizes specified in paragraph 3.1.5 represent the lengths and width of the glass and the mat or item to be displayed. In the style A frame, the molding overlaps the glass by approximately 6.350 mm (1/4 inch). (Style D frame overlaps by approximately 7.1 mm (9/32 1 inch)) Therefore, the display area is 12.7 mm (1/2 inch) less in both length and width than the specified size for style A and 14.2 mm (9/16 inch)) for style D. The style A and D moldings are at least 19.050 mm (3/4 inch) wide so the overall outside size of the style A frames is approximately 1 inch more in length and width than the specified size, while the style D frame is approximately 15/16 inch (2.4 mm) more. The molding on the style B and C frames is at least 34.925 mm (1 3/8 inches) wide and has an overall outside dimension approximately 57.15 mm (1 13/16 inch) larger than the specified size. The sizes and display areas for the style B, C, and D mats are shown in table I.

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:28Z
Check the source to verify that this is the current version before use.

3.8 Workmanship. The workmanship shall be of a quality to produce a serviceable frame of good appearance. The molding shall be accurately shaped. The miter joints shall be strong and true. The finishing brads, nails, or staples shall be completely inserted and the hangars and holding devices securely attached. The edges of the mat cut-outs shall be straight and smooth.

4. Regulatory Requirements: The offerer/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. Quality Assurance Requirements:

5.1 Product Conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards and quality assurance practices and be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

5.2 Performance Testing.

5.2.1 Adhesion. This test shall be in accordance with ASTM D 905 and the sample unit shall be 1/2 pint. Because of the high variance in the test results, the following precautions should be followed. Whenever a specimen fails at a load less than 197 kg/cm2 (2,800 p.s.i.) and the failure occurs 50% or more in the wood, the specimen shall be disregarded in computing the average. In case the shearing strength of one or more specimens is 197 kg/cm2 (2,800 p.s.i.) or higher, and the variation among individual specimens is 10% or more (based on the strongest joint) the test shall be run again, provided the average is less than the required 197 kg/cm2 (2,800 p.s.i).

5.2.2 Holding Devices. The test shall be conducted with the correct number of picture holding devices attached properly to the frame. Each holding device on the frame shall be cycled five times. One cycle shall consist of the operation necessary for the insertion of items in the frame and the removal of items from the frame. At the completion of the five cycles all holding devices on the frame shall be operational. Failure to pass the test shall be cause for rejection.

6. Packaging: Packaging, packing, marking and palletization shall be as specified in the contract or order.

6.1 Marking. In addition to marking specified in the contract or order, each shipping container shall be marked with arrows indicating the position of the container so that the frames are upright. Both sides of each unit container and shipping container shall be stenciled or labeled with the following:

"GLASS - FRAGILE, HANDLE WITH CARE"

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:28Z
Check the source to verify that this is the current version before use.

7. **Notes:**

7.1 Part Identification Number (PIN). The following part identification numbering procedure is for government purposes and does not constitute a requirement for the contractor.

This example describes a part numbering system for CID A-A-3114:

A-A- II B Example of reference part number for Walnut Vinyl Covered, Free Standing frame with easel support.

Style:
- A. - Black Finish
- B. - Walnut Vinyl Covering
- C. - Walnut Stain Finish
- D. - Stain or Paint Finish
- E. - Ribbed Gold
- F. - Oak
- G. - Custom

Type:
- I. - Wall Mounted
- II. - Free Standing with Easel Support

7.2 Source of Documents. The following documents form a part of the Commercial Item Description to the extent specified herein. Unless otherwise indicated, the issue in effect on the date of invitation for bids or request for proposal shall apply:

7.2.1 Federal Acquisition Regulation (FAR) may be obtained from the Superintendent of Documents, Government Printing Office, Washington. DC 20402.

7.2.2 Federal Standards and Specifications may be obtained from the General Services Administration Specifications Section (3FBO-W) in Suite 8100 at 490 L'Enfant Plaza, SW Washington DC 20407.

7.2.3 Copies of the appropriate ASTM's may be obtained from the American Standards for Testing Materials at 1916 Race Street, Philadelphia, PA 19103.

7.3 Ordering Data: Purchasers should select the preferred options permitted herein, and include the following information in procurement documents:

A - Title, number and date of this commercial item description.
B - Type, Style and Size of frame required.
C. - Color of finished if required.
D. - If Mat is required.

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:28Z
Check the source to verify that this is the current version before use.

7.4 **National Stock Number (NSNs) Listing.** The following is a list of nsn's assigned which correspond to this CID. The list may not be indicative of all possible nsn's associated with the CID.

7105000511212	7105014246475	7105014195309	7105014246499
7105000528686	7105014246476	7105014195318	7105014246501
7105000528695	7105014246477	7105014195319	7105014246503
7105000528696	7105014246478	7105014195329	7105014246504
7105000528697	7105014246479	7105014195338	7105014246505
7105000528698	7105014246480	7105014195339	7105014406064
7105000530170	7105014246481	7105014195347	7105014406065
7105000615834	7105014246485	7105014195350	7105014406066
7105001491281	7105014246490	7105014195351	7105014406067
7105004656199	7105014246492	7105014195353	7105014406068
7105009031843	7105014247865	7105014195358	7105014406069
7105012820630	7105000528684	7105014195389	7105014406070
7105012820631	7105000528689	7105014195360	7105014406071
7105012820632	7105000528690	7105014246482	7105014406072
7105012820633	7105001491282	7105014246483	7105014406073
7105014089957	7105002973397	7105014246484	7105014406074
7105014195293	7105002973398	7105014246486	7105014406075
7105014195322	7105004724026	7105014246487	7105014406076
7105014195332	7105006414385	7105014246488	7105014406077
7105014195344	7105009031842	7105014246491	7105014406078
7105014195355	7105014195289	7105014246493	7105014406079
7105014246471	7105014195296	7105014246494	7105014406080
7105014246472	7105014195298	7105014246495	7105014406081
7105014246473	7105014195302	7105014246497	7105014406082
7105014246474	7105014195305	7105014246498	7105014406083


MILITARY INTERESTS:

NONE: DoD has no registered interest in revisions and amendments to this Commercial Item Description until further notice.


Preparing Activity
GSA FSS/2FYEE

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:28Z
Check the source to verify that this is the current version before use.


Style A

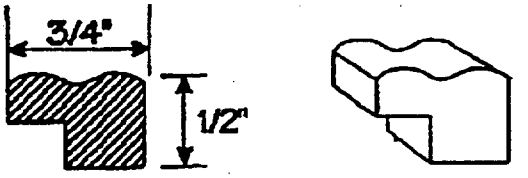

Style B

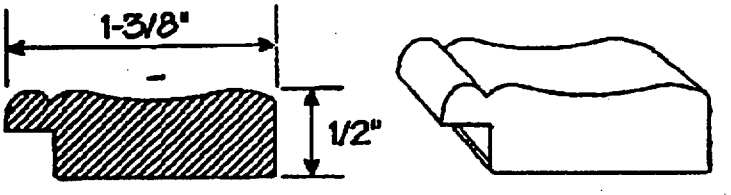

Style C

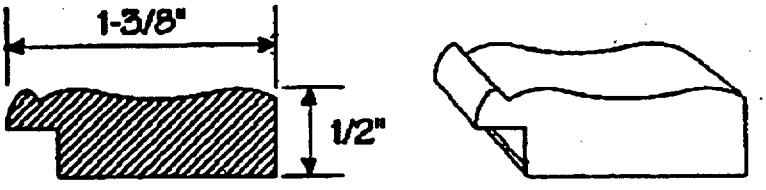

Style D

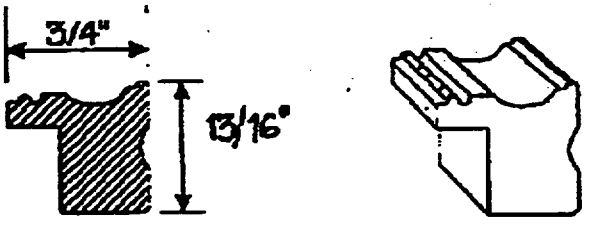


Figure 1

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:28Z
Check the source to verify that this is the current version before use.