INCH-POUND

A-A-55203

03 MAY 1993

COMMERCIAL ITEM DESCRIPTION

SUSPENDERS, TROUSERS (FLYING SUIT)

The General Services Administration has authorized the use of this Commercial Item Description in preference to MIL-S-6790.

Abstract. This commercial item description covers suspenders for use with flying clothing.

Classification. The Suspenders, Trousers shall be in the following types:

Type I - Elastic

Type II - Nonelastic

Salient Characteristics. The suspenders shall consist of two strips of webbing, 1-1/2 inch wide for Type I - Elastic and Type II - Nonelastic and shall be colored sage green shade No. 1514, DPSC HANDBOOK 4120.1. The suspenders will have a crisscross pattern with wire buttonholes on two of the ends and leather buttonholes on the other two ends as shown in figure 1.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FSSD, 2800 South 20th Street, Philadelphia, PA 19101-8419, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A

FSC 8440

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:44Z
Check the source to verify that this is the current version before use.

Material. The Type I elastic webbing shall be a cotton, and rubber, woven construction measuring 1-1/2 inch wide ± 1/16 and cut to 34-inch long strips. The Type II nonelastic webbing shall be a one hundred percent cotton woven fabric measuring 1-1/2 inch wide ± 1/16 and cut to 40-inch long strips. The leather buttonholes shall be 3/64 to 4/64 inch in thickness colored black or russet. All hardware shall conform to figure 1 and shall be zinc plated and lacquered black. The buckle shall be made from 0.020-inch 1010 cold-rolled steel and the back of the buckle shall be made from .058 soft steel wire. The wire buttonholes shall be made from 0.088-inch 1010 hot-rolled steel and the butted ends shall be welded together. The metal parts of the castoff shall consist of a wire loop made from 0.080-inch soft basic steel wire; a ferrule and a suspender hook made from 0.015-inch 1010 hot rolled steel, and a complete snap fastener set.

Label/marking. Each suspenders shall be permanently and legibly indented or marked with the manufacturer's name or trademark of such characters as to be identifiable with the manufacturer.

Workmanship. After completion, the finished suspenders shall be thoroughly cleaned, and all loose thread, lint, sharp edges, and foreign matter removed.

Product Demonstration Model. When required, offerers shall submit samples of their intended production. The Product Demonstration Model will consist of units independently developed. Product Demonstration Models will be analyzed and evaluated by the government. Evaluation criteria and basis for award are contained in the solicitation. Product Demonstration Models will be retained by the government. One (1) Product Demonstration Model approved by DPSC under the resultant contract will serve as a manufacturing standard for the corresponding production items delivered under this contract. Offerers are advised that the Product Demonstration Model does not relieve the successful offerer of his responsibility to perform in accordance with the Commercial Item Description specified above.

Regulatory Requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

Quality Assurance

Certification. The contractor shall certify that the product offered meets the salient characteristics and the requirements of this commercial item description, and where certificates of compliance are submitted, the government reserves the right to require proof of such conformance prior or to check such items to determine the validity of the certificate.

Examination. Lots of suspenders shall be inspected in accordance with "Sampling Procedures and Tables for Inspection by Attributes", ANSI/ASQC Z1.4, published by the American Society for Quality Control.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

Visual Examination. The suspenders shall be examined for the defects listed below. The lot size shall be expressed in units of suspenders. The sample unit is one suspender. The inspection level shall be II and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 2.5.

Packaging Examination. The fully packaged shipping containers shall be examined in accordance with defects listed below. The lot size shall be the number of shipping containers in the inspection lot. The inspection level shall be S-2 and AQL, expressed in terms of defects per hundred units, shall be 2.5.

Dimensional Examination. The finished suspenders shall conform to the dimensions specified. Any dimension that is not within the established tolerance shall be classified as a defect. The sample unit shall be one; the inspection level shall be S-3 and the AQL shall be 4.5.

Packaging Examination. The fully packaged shipping containers shall be examined in accordance with defects listed below. The lot size shall be the number of shipping containers in the inspection lot. The inspection level shall be S-2 and AQL shall be 2.5.

Examination	Defect
Material	Missing, damaged, not as required.
Marking (exterior of and interior)	Omitted, incorrect, illegible, improper size, location, sequence or method of application.
Content	Number of suspenders per shipping container is more or less than required.
Workmanship	Incomplete closure of container flaps, loose or inadequate strapping.
Palletization	Length, width, or height exceeds specified maximum requirements
	Pallet type not as specified
	Load not bonded as specified

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

Defects. The suspenders shall be examined for the following defects: any hole, cut, tear, color not as specified; any spot or stain (outside); thread ends not removed; label missing, incorrect, or illegible; brand marks and excessive softness of leather; broken or malformed, corroded areas, burr or sharp edges; measurement of item not as specified.

Preservation, Packing, and Marking. The preservation, packing, and marking shall be as specified in the contract or order.

Source of Government Documents. Copies of Military and Federal documents are available from:

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

Sources of Nongovernment Documents.

ANSI/ASQC Z1.4 - Sampling Procedures and Tables For Inspection By Attributes

(Applications for copies should be addressed to American National Standards Institute, 1430 Broadway, New York, NY 10018-3308.)

Custodian:
Army - AV
Navy - AS
Air Force - 99

Review Activity:
Air Force - 82

User Activity:

Civil Agency Coordinating Activity:
GSA - FSS

Preparing Activity:
DLA - CT

Project No.8440-0204

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

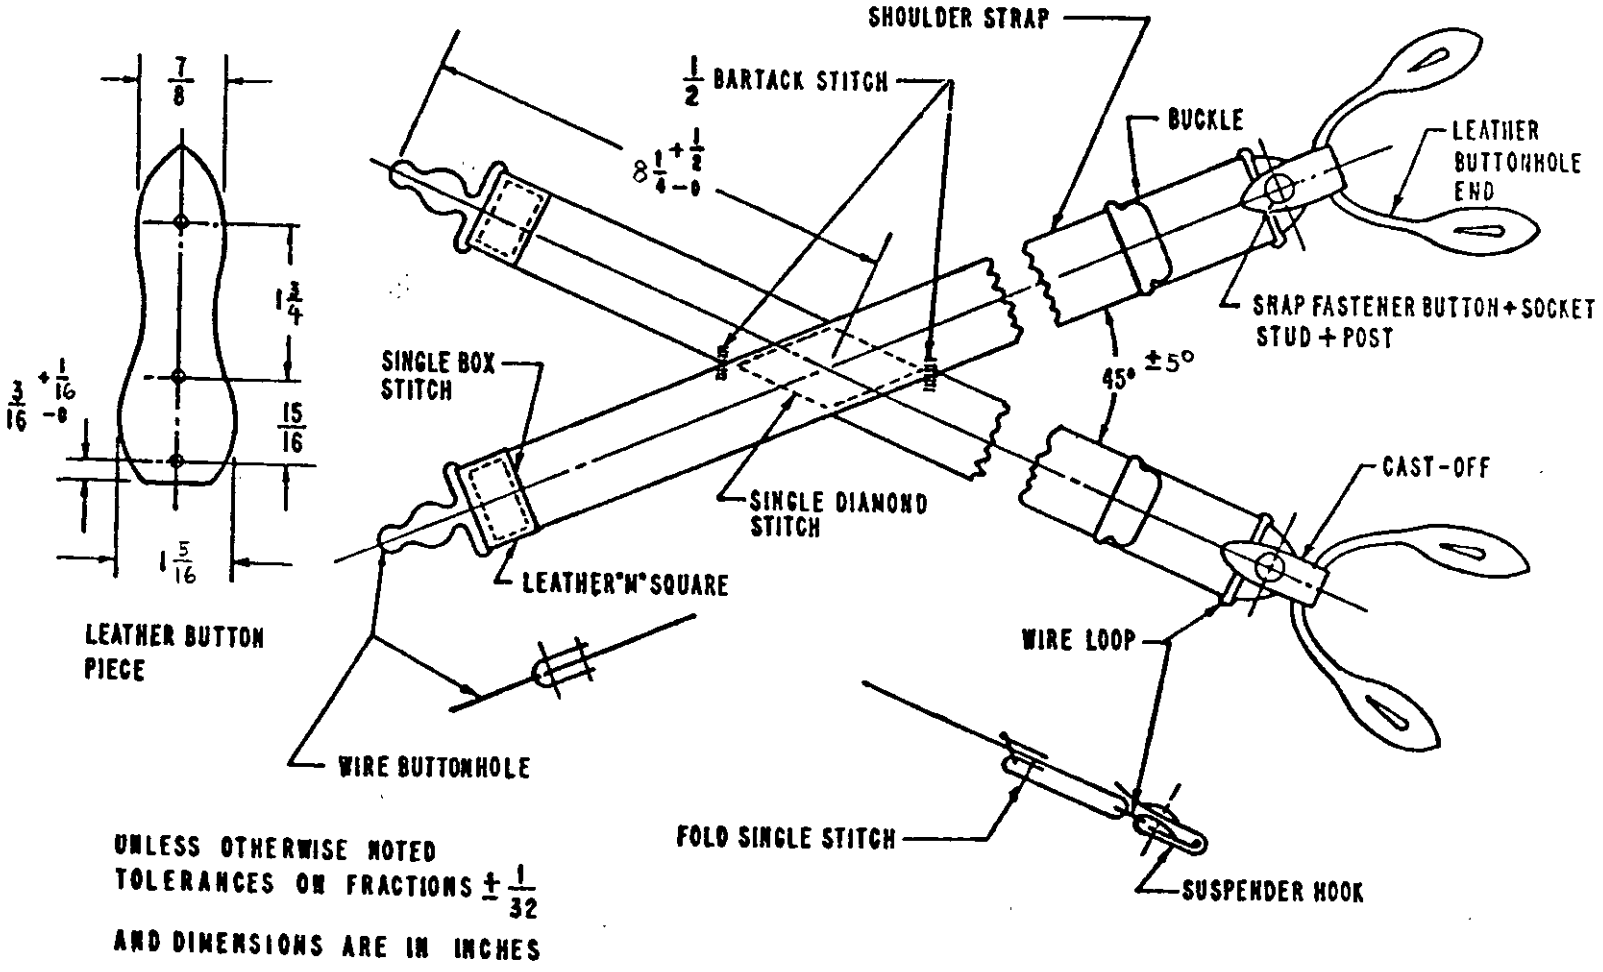


FIGURE 1 - SUSPENDERS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

STANDARD[illegible]ATION DOCUMENT IMPRO[illegible]MENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	A-A-55203	03 MAY 1993

3. DOCUMENT TITLE

SUSPENDERS, TROUSERS

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
Defense Personnel Support Center ATTN: DPSC-FSSD (12-3-D)	(1) Commercial 215-737-8105	(2) AUTOVON 444-8105
c. ADDRESS (Include Zip Code) 2800 South 20th Street P. O. Box 8419 Philadelphia, Pennsylvania 19101-8419	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 *Previous editions are obsolete.* 198.

10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.