INCH POUND
A-A-55210A
MAY 4, 2000
SUPERSEDING
A-A-55210
MAY 27, 1993

COMMERCIAL ITEM DESCRIPTION

SLACKS, FEMALE, WORKING BLUE, POLYESTER/COTTON (CG)

The General Services Administration has authorized the use of this commercial item description as a replacement for A-A-55210 for all Federal agencies.

1. SCOPE. This commercial item description covers the requirements for women's slacks used by female military personnel of the Coast Guard as part of the undress and working blue uniform.

2. CLASSIFICATION. The slacks shall be one type only, and shall be available in the following sizes:

Sizes. 6, 8, 10, 12, 14, 16, 18, 20, 22

Lengths. Short, Regular, Long, X-Long

3. SALIENT CHARACTERISTICS.

3.1 Description. The slacks shall be a single needle construction except the seat seam shall be made with a double needle seat seamer. All seams shall be overedged and pressed open. The bottoms shall be unhemmed and overedged. The waistband shall be two piece and shall finish

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: Defense Supply Center Philadelphia, Clothing and Textiles Directorate, ATTN: DPSC-CRFD, 700 Robbins Avenue, Building 6D, Philadelphia, PA 19111-5096.

AMSC N/A FSC 8410

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

1-3/4 (± 1/8) inches wide utilizing a commercial type lining assembly and a hook and eye closure. The slack shall have two (2) uncut front waist darts and four (4) uncut back waist darts. The slack shall have five (5) belt loops for sizes up to and including size 12, and seven (7) for size 14 and above (see figure 1); and shall measure 5/8 to 3/4 inches wide with a 1-3/4 (± -1/8) inch opening (see figure 2); a "J" stitched right front slide fastener fly; two (2) quarter top side pockets with one row 1/16 inch edgestitch and shall have a 5-3/8 to 5-5/8 inch opening bartacked at both opening ends. The slack shall have two (2) double welt (1/8 to 3/16) hip pockets and shall measure 5-1/4 (± 1/8) inches wide and bartacked vertically at both ends, and 6-1/4 (± 1/4) inches in depth, with a button and 5/8 to 3/4 inch vertical buttonhole worked over gimp centered 3/16 to 5/16 inch below the lower welt seam on left pocket. The slack shall be pressed smooth at the top including the fly and the legs shall be creased in the center with the seam matching at the bottom and in the crotch.

3.2 MATERIAL.

3.2.1 Basic material. The basic material shall be a 65% polyester/35% cotton twill in accordance with CG-CDTO-T-0800. The color shall be Blue 3362.

3.2.2 Pocketing and lining. The cloth for the pockets, waistband lining, and left fly lining shall be polyester, polyester/cotton, or polyester/rayon twill. The color shall be Black . The cloth shall have a minimum weight of 4.3 oz/sq. yd and a minimum breaking strength of 72 pounds (warp) and 55 pounds (filling) when tested as specified in ASTM-D-5034.

3.2.3 Interlining. The material for interlining the waistband shall be a polyester or polyester/cellulose blend non-woven with a minimum weight of 3.0 oz/sq yd and be equivalent to commercial industry standards.

3.2.4 Thread. The thread shall be a cotton-covered polyester thread conforming to ticket number 50 or 70, 2 or 3-ply for seaming and stitching, ticket number 50 for bartacks and buttonholes and ticket number 16 or 24 for button sewing. The color shall be black. The thread shall show "good" colorfastness to laundering and light when tested in accordance to AATCC 61, Test 3A and AATCC 16 Option A, respectively.

3.2.5 Gimp. The gimp for reinforcing the buttonholes shall conform to Type I or II, size No 8. The color shall be black. The gimp shall show "good" colorfastness to laundering and light when tested to AATCC 61, Test 3A and AATCC 16, Option A, respectively.

3.2.6 Button. The button for the left hip pocket shall be flat, 4 hole melamine plastic, 22-line. The color shall be Black BT, Cable No. 62001 with a glossy finish.

3.2.7 Slide fastener. The slide fastener shall be non-separating, non-reversible cam lock, size light medium, short tab pull. All metal components of the slide fastener shall be brass and the semi-automatic pin lock cover and spring shall be stainless steel. A staple bottom stop is

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

required. As an alternate, a continuous monofilament nylon or polyester coil chain with polyester or polyester/cotton blend tape and automatic lock may be used. The color of the tape shall approximate the shade of the basic material. The tape shall show "good" .colorfastness to laundering and light when tested in accordance with AATCC 61, Test 3A and AATCC 16 Option A, respectively.

3.2.8 Hook and eye. The hook and eye for the waistband shall be North and Judd (Hook flex H-49 and E-50), Universal Button Co. (Talon #3, #7,or #8 hook with #8 eye or #85 eye), Patwin Inc., (Slim-Slack with MB eye) or equal. The finish of both components shall be nickel plate.

3.3 Labels. Each pair of slacks shall have a identification instruction label and shall be placed on the outside bottom of the right side pocket (facing wearer) stitched completely around label without stitching through the printing; and a size label and NSN shall be placed in waistband on right side above back pocket. The print characters shall be a minimum of 18-points (approximately 1/4 inch) and the print shall be black showing "good" color fastness to laundering when tested in accordance with AATCC 61, Test 3A. The inscription for the combination identification and instruction label shall be as follows.

NAME:
Size: 12 Regular (Example)
SLACKS, FEMALE, WORKING BLUE
FIBER CONTENT: 65% POLYESTER 35% COTTON
CONTRACT NO.: SPO100-000-0000 (Example)
NAME OF CONTRACTOR:
NAME OF MANUFACTURER: (if other than contractor)
NATIONAL STOCK NUMBER

INSTRUCTION

MACHINE WASH, WARM (120 F MAX)
USE MILD SOAP OR DETERGENT
DO NOT BLEACH OR STARCH

TUMBLE DRY, MEDIUM HEAT, REMOVE PROMPTLY
If needed, touch up with iron – low setting

An additional paper size label shall be tacked to the outside of the waistband near the right front pocket. The inscription for the size label shall be as follows:

14 R (EXAMPLE)
8410-00-0000-0000 (EXAMPLE)

3.3.1 Label/tag. Each item shall be individually bar-coded with a paper tag for personal clothing items. The paper tag shall be standard bleached sulfate having a basis weight of 100 pounds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

The paper used for the tags shall have a smooth finish to accept thermal transfer and direct printing. The tags shall have

a hole and shall be attached to each item by a fastener, clearly legible and readable by a scanner. The bar coding element shall be a 13 digit national stock number (NSN). There shall be a 12 digit UPC bar code number assigned for all NSNs by the procuring activity. The initials UPC must appear beneath the code. The bar code for NSNs and UPC type shall be a medium to high code density and shall be located so that it is completely visible on the item when it is folded and/or packaged as specified and so that it causes no damage to the item.

3.4 Seams and stitches. Seaming shall be consistent and exhibit a uniform appearance and shall conform to ASTM-D-6193 stitch and seam types. All topstitching, and raise stitching shall be sewn with 12-14 stitches per inch with 301 stitch type. All other seams shall be sewn with 12-14 stitches per inch with 301 or 401 stitch type, except that the back seam shall be sewn with 8-10 stitches per inch with a double needle seat seamer 1/32 to 1/64 gage with 401 stitch type. All overedge stitching shall be 6-8 stitches per inch. To maintain durability and functionality, bartacks 3/8 to 5/8 inch in length with approximately 27 stitches per inch are required at the reinforcement points, top and bottom of side pocket openings, at the ends of the welt pocket openings, bottom of fly, and belt loops. Buttonholes shall be eyelet end, taper bar, 5/8 to 3/4 inch length and 52-56 stitches per inch with end securely tacked. All material edges shall be clean finished. Edges shall be turned-in, turned-under, or serged.

3.5 Sizes and measurements. The finished measurements of the slacks shall conform to Table I. All measurements and tolerance are expressed in inches, and shall be taken without pulling or stretching the slacks.

TABLE I. Finished measurements

Size	Waist (A)	Hips (B	Inseam – Unhemmed (C) S	R	L	XL	Knee (D)	Leg (E) Bottom
6	23-1/2	36	32	34	36	38	18-3/4	18-3/4
8	24-1/2	37	32	34	36	38	19	19
10	25-1/2	38	32	34	36	38	19-1/4	19-1/4
12	27	39-1/2	32	34	36	38	19-1/2	19-1/2
14	28-1/2	41	32	34	36	38	19-3/4	19-3/4
16	30	42-1/2	32	34	36	38	20	20
18	32	44-1/2	32	34	36	38	20-1/4	20-1/4
20	34	46-1/2	32	34	36	38	20-1/2	20-1/2
22	36	48-1/2	32	34	36	38	20-3/4	20-3/4
Tol.	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

(A) With slide fastener closed and waistband hooked, measure along top edge of waistband from folded edge. Multiply by two (2).

(B) With slide fastener closed and waistband hooked, measure from edge to folded edge, one inch above fly bartack. Multiply by two (2).

(C) Measure along inseam from crotch seam to (unhemmed) bottom edge of leg.

(D) Twice the measurement from folded edge to folded edge across the width of slack leg at a point up from bottom of leg as follows:

Short - 16 inches	Long - 18 inches
Regular - 17 inches	X-Long - 19 inches

(E) Measure across unhemmed bottom edge of leg. Multiply by two (2).

3.6 Patterns. The Government will furnish a set of standard patterns to be used to cut working patterns. The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way, except that additional notches for use during construction are allowed on working patterns. Also, minor modifications are permitted where necessary when using automatic equipment. These modifications shall not alter the dimensional, serviceability, or appearance requirements. The standard patterns provide a seam allowance of 5/16 inch for all seams except for 1/2 inch allowance for the inseams and outseams. In addition, the back seam allowance shall be 7/8 inches at the top tapered to 1/2 inch at the crotch.

3.6.1 Pattern Parts. The component parts shall be cut from the materials specified in accordance with the following pattern parts:

Material	Pattern part	Cut parts
Basic material	Front	2
	Back	2
	Waistband	2
	Side pocket bearer	2
	Side pocket facing	2
	Hip pocket bearer	2
	Hip pocket narrow facing	2
	Left fly	1
	Right fly facing	1
	Right fly interlining	1
Pocketing/lining	Side pocket	2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

Hip pocket	2
Left fly lining	1

4. REGULATORY REQUIREMENTS.

4.1 Recycled, recovered, or environmentally preferable materials. Recycled, recovered or environmentally referable materials should be used to the maximum extent possible provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

5. PRODUCT CONFORMANCE PROVISIONS

5.1 Product conformance. The products offered shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product that is offered for sale in the commercial market. The Government reserves the right to require proof of such conformance.

5.2 Defects. Any hole, cut or tear, or needle chew, burn; drill hole, multiple float, open place, knot slub, misweave, loose yarn, woven in waste, color not as specified; any variation between parts, poor dye penetration, or dyestreak. Any omitted or poor pressing, any double crease line, any burn or scorch, gloss or impressions not removed, legs not pressed seam to seam. Any spot or stain, raw edges, open seams, thread ends not removed, loose or tight tension; any component not as specified, tight, twisted distorted, pleated, or full. Any component part or operation omitted. Buttonhole omitted, not as specified type, not finished as specified, or misplaced. Button omitted, broken, defective, misplaced, not as specified, or insecurely sewn. Hook and eye damaged, not securely attached causing a bulge, twist, distortion, or pucker. Bartacks missing, insecure, misplaced, not serving intended purpose, or loose stitch tension. Width of waistband or waistband lining not as specified, lining exposed on outside, waistband puckered pleated, or excess fullness. Belt loops omitted, misplaced, not as specified width or length. Length of fly uneven at top, fly facing exposed beyond front edge, seam joining right fly to front exposed when fly is closed, right fly stitching irregular. Slide fastener not operable, stitching too close to edge of chain not permitting slider too pass freely, any cut, tear, or hole in slide fastener tape. Top of pocketing not securely or evenly inserted under waistband, pocketing caught in unrelated stitching, unfinished seam on pocketing, hip pocket welt varies in width, dart incomplete or not extending into pocket opening. Outlet or lining outlet at waistband omitted or less than specified amount. Any label missing, incorrect, or illegible; bar code label omitted or not readable by scanner; human-readable interpretation (HRI) omitted or illegible; bar code label not visible on folded, packaged item; bar code causes damage to the item; any items not packaged in accordance with the contract or order.

5.3 Acceptance criteria. Acceptance criteria shall be as specified in the contract or purchase order.

6. PACKAGING

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

6.1 Preservation, packing, and marking. The preservation, packing, and marking shall be as specified in the contract or purchase order.

7. NOTES

7.1 Source of Government documents. Copies of military and Federal documents are available from:

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

7.2 Source of non-Government documents.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM-D-5034-	Breaking Force and Elongation of Textile Fabrics (Grab Test)
ASTM-D-6197	Standard Practice for Stitches and Seams

(Applications for copies should be addressed to American Society for Testing and Materials (ASTM), 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.)

AMERICAN ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS (AATCC)

AATCC 16A		Colorfastness to Light
AATCC 61	-	Colorfastness to Laundering, Home and Commercial: Accelerated

Applications for copies should be addressed to American Association of Textile Chemists and Colorists (AATCC), P. O. Box 12215, Research Triangle Park, NC 27709-2215.)

COLOR ASSOCIATION OF THE UNITED STATES


Standard shades may be available from the Color Association of the United States, Inc., 589 8th Avenue, 12th floor New York, NY 10018. If standard shades are not available from the Color Association, individual color samples may be obtained from the contracting activity or as directed by the contracting activity

Custodian: Preparing Activity:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

Navy – CG

DLA - CT
Project 8410-0915

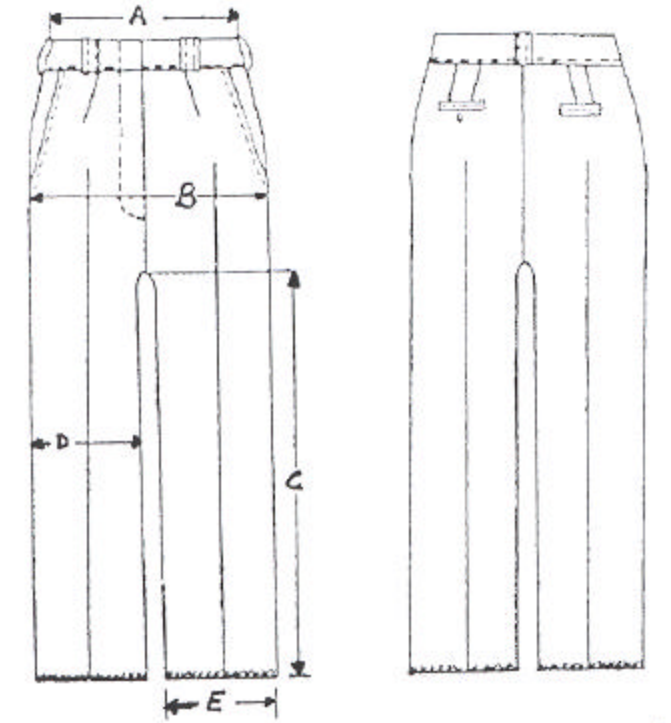

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

FIGURE 1
SLACKS, FEMALE, WORKING BLUE

Attaching Belt Loop
(All measurements given in inches)

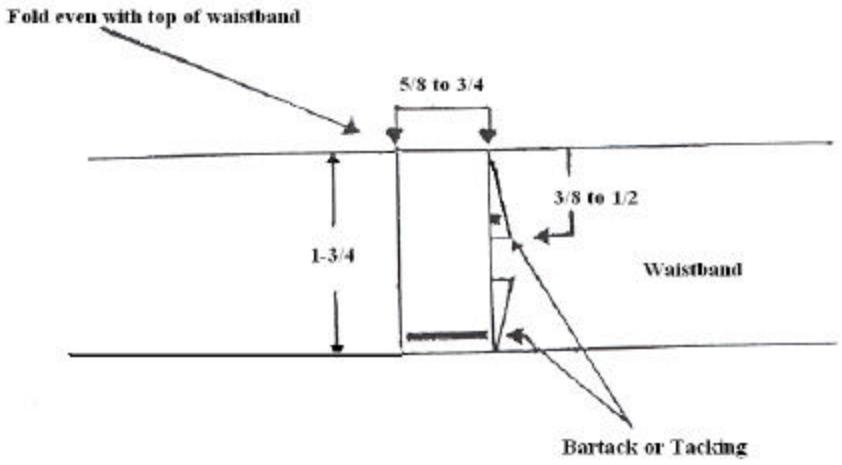


FIGURE 2
SLACKS, FEMALE, WORKING BLUE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.