INCH-POUND
A-A-55212A
12 March 2026
SUPERSEDING
A-A-55212
June 14, 1993

COMMERCIAL ITEM DESCRIPTION

BELT, ALL-WEATHER COAT, WOMEN'S

The General Services Administration has authorized the use of this commercial item description by all federal agencies.

1. SCOPE. This commercial item description covers the requirements for a belt for wear with the associated All-Weather Coat by female military personnel of the Department of Defense.

2. CLASSIFICATION. The belt covered by this commercial item description shall be one type and available in the following classes and sizes, as specified (see 7.3).

2.1 Classes.

Class 1 – Pewter 2246

Class 2 – Black 385

Class 3 – Heritage Green 564

2.2 Sizes.

4 6 8 10 12 14 16 18 20 22 24 26

3. SALIENT CHARACTERISTICS.

3.1 Description. The belt design (see figure 1) has one end pointed on a 45-degree angle, and the other end square to attach to the buckle (see 3.3.5), with a fixed belt loop style keeper. The belt has an anchor and a button on the underside of the buckle to secure the belt to the coat.

3.2 Standard sample. The finished belt shall match the standard sample, as applicable to the specified class, for appearance and shall be equal to or better than the standard sample with respect to all characteristics for which the standard sample is referenced.

3.3 Materials.

3.3.1 Basic material. The basic material for the belt, including the belt loop style keeper and the buttoned belt anchor, shall be water-repellent-treated polyester/cotton poplin cloth meeting the requirements of A-A-50531. The cloth shall be a plain weave and shall match the standard sample for shade, appearance, and colorfastness in the shade specified in the contract or order (see 7.3). The shade of the material shall be in accordance with the applicable class (see 2.1). Unless otherwise specified in the contract or order (see 7.3), requirements in A-A-50531 for drycleaning and resistance to organic liquid shall not apply.

3.3.1.1 Labile sulfur. Dyes and compounds containing sulfur capable of oxidation to sulfuric acid shall not be used. The cloth shall be "Free" (see 3.3.1.2.a) of labile sulfur when tested as specified in 3.3.1..2.

Comments, suggestions, or questions on this document should be sent to trpsptctstandardiz@dla.mil. Since contact information can change, verify the currency of the address information using ASSIST online database https://assist.dla.mil.

FSC 8410

DISTRIBUTION STATEMENT A. Approved for public release: Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

3.3.1.2 Presence of labile sulfur test. In the determination of labile sulfur in textile materials with lead acetate, two 1.50±0.01-gram samples from each material submitted for evaluation shall be tested. Each of the two samples shall be cut into very small pieces and placed into separate test tubes. The samples shall be submersed in a stannous chloride solution that contains 100 grams of American Chemical Society (ACS) grade stannous chloride crystals in 100 milliliters of ACS grade hydrochloric acid (35 percent concentration) and 50 milliliters of distilled water. A filter paper wet out with a 5.0 percent lead acetate solution shall be placed over the top of the test tube. The lead acetate solution shall contain 5.0 grams of chemically pure (CP) reagent grade lead acetate and enough distilled water to make up a 100-milliliter solution; if the solution is not clear, a few drops (one at a time) of glacial acetic acid shall be added until the solution is clear. The test tube containing the textile sample, stannous chloride, and wet filter paper shall be heated over a low flame until the solution is boiling. The solution should not be heated for more than 15 seconds. A brown to black stain on the filter paper should be evaluated as follows:

a. Free – the filter paper shows no discoloration or staining of any kind.
b. Slight – the filter paper shows a light tan to light brown discoloration stain.
c. Moderate – the filter paper shows a dark brown discoloration stain.
d. Severe – the filter paper shows a black discoloration stain.

The rating shall be recorded. The results shall be recorded as “pass” or “fail”.

3.3.2 Fusible interfacing. The interfacing of the belt shall be a nonwoven fusible material consisting of 85 percent polyester and 15 percent polyamide or 100 percent polyester, with a weight of 1.75 to 2.0 ounces per square yard, with a polyamide dot adhesive. The shade shall be charcoal, black, white or natural and shall show a colorfastness to laundering (3 cycles) minimum rating of 3.0 and shall show no bleeding of color after laundering. For optimum fusing results, specific fuse times and settings should be obtained from the manufacturer of the non-woven fusible.

3.3.3 Button. One 24-ligne button in accordance with A-A-59994, type 20 or 21, shall be placed on the backside of the belt to correspond with the buttonhole on the belt anchor.

3.3.4 Thread. The thread for seaming and stitching shall be in accordance with A-A-50199 type I, 36-45 Tex, two-ply thread for needle, bobbin, or looper or 31-35 Tex, two-ply thread for bobbin or looper. The thread for button sewing shall be in accordance with A-A-50199 type I, 61-70 Tex, two- or three-ply. Threads shall be a good match to the basic material shade.

3.3.5 Buckle. The plastic buckle for the belt shall be a 2-1/4 inch melamine formaldehyde item in accordance with class 3 of MIL-B-1860 (see figure 2). The shade of the buckle shall be a good match to the basic material of the belt being produced.

3.4 Labels.

3.4.1 Label and marking. A label meeting the requirements of MIL-DTL-32075, type III, class 1, shall be located at the buckle end of the belt on the backside. The label shall include the nomenclature, size, contract number and National Stock Number (NSN). When tested in accordance with AATCC TM61, the label shall have a colorfastness rating of “good” to laundering.

3.4.2 Bar code label. The belt shall be coded with a tag meeting the specifications of MIL-DTL-32075, type VIII, class 17; alternatively, a label meeting the requirements of type VII, class 17 may be adhered to the outside of an individual poly bag used for packaging.

3.5 Patterns. Commercial patterns shall be used and shall conform to the design requirements specified herein. As an alternative, pattern pieces are included in MIL-DTL-32767 to allow the belt pieces to be cut from the same lot of fabric used to make the associated coat.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

3.6 Finished measurements. The belt shall conform to the finished measurements in table I. Belts shall be laid flat, allowed to rest, and measurements shall be taken along the center from the folded edge of the belt at the buckle to the pointed end of the belt. All belts shall be 2-1/8 (±1/8) inches in width.

TABLE I. Finished measurements (inches).

Size	Length
4	38
6	39-1/2
8	41
10	42-1/2
12	44
14	45-1/2
16	47
18	49
20	51
22	53
24	55
26	57
Tolerance	±3/4

4. REGULATORY REQUIREMENTS. Recycled, recovered, environmentally preferable, or biobased materials should be used to the maximum extent possible, provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

5. PRODUCT CONFORMANCE PROVISIONS.

5.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The government reserves the right to require proof of such conformance.

5.2 Market acceptability. The item offered must have been sold to the government or commercial market.

5.3 Visual examination. Each belt shall be examined for the defects listed below. Defects in excess of the manufacturer's own quality assurance standards or acceptance quality limits specified in the contract or order may be cause for failure of the belt.

a. Material defects – any hole, cut, tear, mend, drop stitch, misweave, slub, streak, permanent fold, pleat, or crease; any spot or stain, discoloration, or color not as specified; any shaded part; or any objectionable odor.

b. Seams and stitching – loose or tight stitching tension, broken or missing thread or stitch, needle chew; any part caught in an unrelated operation or stitching; raw edge, thread breaks, or thread ends not removed; or any seam puckered, distorted, pleated, irregular, or open.

c. Workmanship – any component part omitted, twisted, not specified size, misplaced, poorly shaped, or not lying flat. Measurement of item not as specified.

d. Labels – label(s) missing, incorrect, or illegible; bar code or UPC code label omitted or not readable by scanner; human-readable interpretation omitted or illegible; bar code not visible on folded, packaged item; or bar code label causes damage to the item.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

6. PACKAGING. Preservation, packing, and marking shall be as specified in the contract or order.

7. NOTES.

7.1 Intended use. The belt is intended for wear by female military personnel of the Department of Defense with the appropriate all-weather coat.

7.2 Source of documents.

7.2.1 American Association of Textile Chemists and Colorists (AATCC). AATCC test methods are available from www.aatcc.org.

7.2.2 Defense specifications. Defense specifications are available online at https://quicksearch.dla.mil.

7.3 Ordering data. The contract or order should specify the following:

a. CID document number and revision.
b. Quantity required.
c. Class(es) and size(s) required; and shade information, as necessary (see 2 and 2.1.).
d. Product conformance provisions and acceptance quality limits (see 5.1).
e. Variations in requirements (see 3.3.1)

7.4 Visual shade matching. In 2017, option A of AATCC EP9, Visual Assessment of Color Difference of Textiles, was changed to option C. NOTE: In case of confusion, the viewing geometry should be "The specimen plane and illumination source will be parallel to each other and aligned so that the light flux is incident at the center of the specimen plane, which is set at a 35±5-degree angle relative to the horizontal. The observer will view the specimens at a 90-degree angle, relative to the plane of the specimens."

7.4.1 Use of D75 illuminant. In 2022, the U.S. Military (all services) accepted D65 as the new preferred light source for visual shade matching due to supply chain issues with D75. DD1222s should reflect which light source is used. If the light source is not indicated on the DD1222, D65 will be assumed by the Government Shade Laboratory.

7.5 Standard samples. Standard samples for shade or appearance can be obtained through the contracting agency.

7.6 Key words.

Poplin

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.


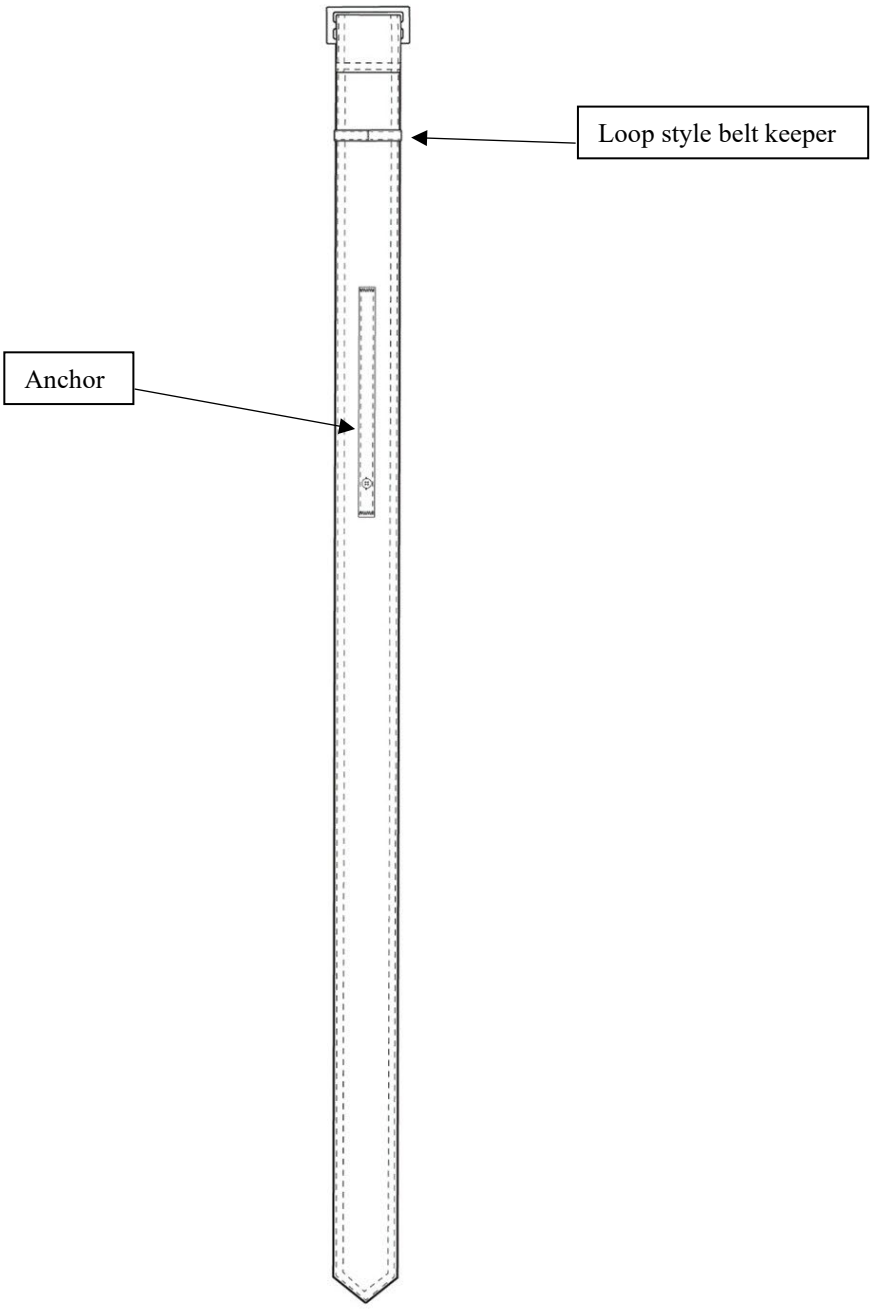


FIGURE 1. All-Weather Coat Belt, back view.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

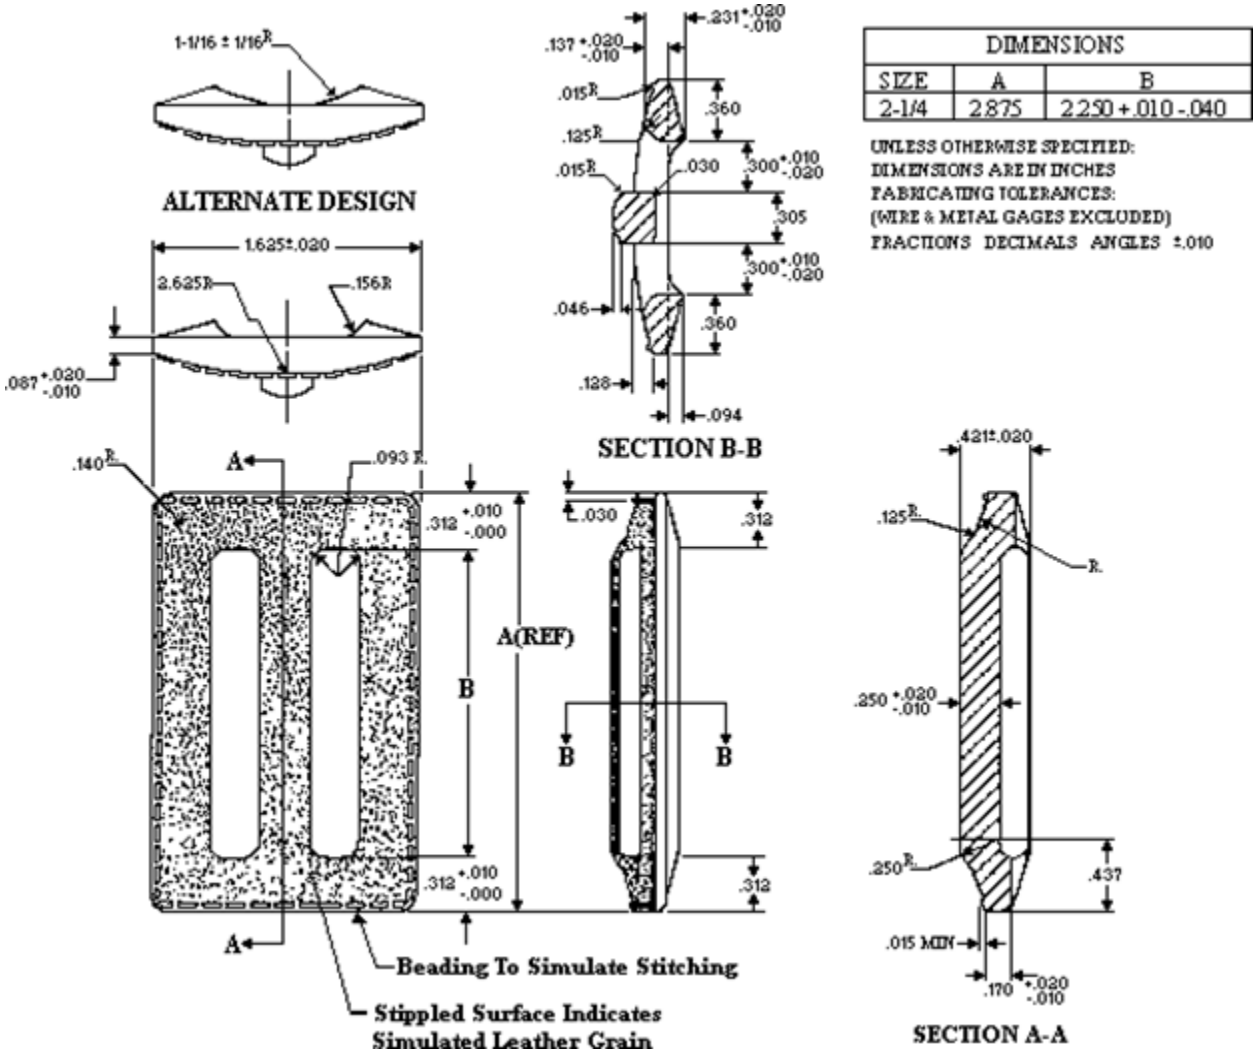

NOTE: FOR INFORMATION ONLY. NOT TO SCALE.

FIGURE 2. All-Weather Coat Buckle, nominal measurements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

MILITARY INTERESTS:

Custodians:
Army – GL
Navy – MC

CIVIL AGENCY COORDINATING ACTIVITY:
GSA – FAS

Preparing Activity:
DLA - CT
(Project 8410-2025-011)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.