INCH-POUND

A-A-55213
November 2, 1993

COMMERCIAL ITEM DESCRIPTION

GLOVES, PERMEABLE, CLOTH, COTTON, OLIVE GREEN

The General Services Administration has authorized the use of this commercial item description in preference to MIL-G-1057.

Abstract. This document covers a dyed cotton glove for use to protect the hands and wrists from vesicants. The glove shall be a full inseamed, slip-on, seamless palm, Gunn style glove. The seam at the base of the fingers shall be provided with a reinforcement welt turned up to cover the stitching. A long knitted wristlet is inseam sewn to top of the hand portion of the glove. Unless the gloves are impregnated with an antivesicant material no protection will be provided.

Salient characteristics. The glove shall be of one class in sizes Small, Medium and Large. The fabric for the hand portion and welt shall be dyed, cotton, plain (jersey) knit. The fabric shall be napped (fleeced) on the back and be able to meet the following physical requirements.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FSSD, 2800 South 20th Street, Philadelphia, PA 19101-8419, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

Characteristic	Test Method	Requirement
Ounces per yard (minimum)	ASTM D3776-Opt C	10.5
Wales per inch (minimum)	FED-STD-191 5070	19
Courses per inch (minimum)	FED-STD-191 5070	22
Bursting strength, pounds (minimum)	ASTM D3787	75

The fabric for the cuff shall be a 1 by 1 rib knit, seamless, dyed, cotton tubing. The tubing shall meet the following physical requirements.

Characteristic	Test Method	Requirement
Yards per pound:	ASTM D3776-Opt C	
Minimum		8.0
Maximum		12.0
Wales per inch (Minimum)	FED-STD-191 5070	16.0
Courses per inch (Minimum)	FED-STD-191 5070	20.0
Flat width, inches (Minimum)	FED-STD-191 5020	3

Thread

The thread for seaming and stitching shall be cotton, type I, 30/3 ply, in accordance with A-A-52094, dyed to approximate the basic fabric.

Seams and stitching

A lockstitch or chainstitch shall be used to join finger pieces to palm with inserted 1/2 inch welt and inseam, with one row of stitching 1/8 to 3/16 inch from cut edge. The closing shall also be done with a lockstitch or chainstitch joining the front and back together with one row of stitches 1/8 to 3/16 inch from the cut edge. The cuff is to be attached using a chainstitch by joining the cut ends of the double thickness wrist tubing to hand inseaming with one row of stitching 3/16 to 1/4 inch from cut edge completely around and continuing the stitching by at least 1 inch beyond the beginning and leaving 1/2 to 3/4 inch chain at point of run-off. Ends of closing stitches of hand wrist shall be caught in cuff stitching. There shall be 10 - 14 stitches per inch.

Sizes and measurements. The measurements of the finished glove shall conform to the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

	Fig. 1 reference	Measurements (inches) S	M	L	Tolerance plus or minus
Total length	A	16-3/4	17-1/4	17-3/4	1/2
Hand width	B	4-1/8	4-3/8	4-5/8	1/4
Hand length	C	10	10-1/4	10-1/2	1/4
Cuff width	D	3-1/4	3-1/4	3-1/4	1/4
Cuff length	E	6-3/4	7	7-1/4	1/4
Thumb length	F	2-1/2	2-3/4	3	1/4
Middle finger length	G	3-1/4	3-1/2	3-3/4	1/4

NOTE: The measurements shall be made with the glove laid out flat under no tension.

Color. The color of the knitted fabrics shall be Olive Green 109 (standard sample is available). The use of sulfur dyes and dyes containing elementary sulfur or compounds capable of oxidation to sulfuric acid is prohibited. The dyed fabrics shall show no more labile sulfur than shown by the standard sample, when tested as specified in FED-STD-191 method 2020.

Matching. The color of the finished cloth shall match the standard sample when viewed under filtered tungsten lamps that approximate artificial daylight and that have a correlated color temperature of 7500 ± 200 K, with illumination of 100 ± 20 foot candles, and shall be a good match to the standard sample under incandescent lamplight at 2300 ± 200 K.

Colorfastness. The finished cloth shall show fastness to laundering, bleach, and perspiration equal to or better than the standard sample when tested under the following guidelines;

Rules and Regulations Under The Textile Fiber Products Identification Act

(Applications for copies should be addressed to Federal Trade Commission, Washington, DC 20580)

AATCC 61 - Colorfastness to Laundering, Home, and Commercial: Accelerated

AATCC 8 - Colorfastness to Crocking: AATCC Crockmeter Method

AATCC 15 - Colorfastness to Perspiration

pH. The pH of the water extracted from the finished fabric shall be not less than 5.0 and not more than 7.0 when tested as specified in ASTM D2165.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

Non-fibrous material. The starch and protein content including chloroform-soluble and water-soluble material in the finished fabric shall not exceed 3.0 percent when tested as specified in FED-STD-191 method 2611.

Label/marking. Each glove shall be marked with a combination identification and size label by direct printing, stamping or stenciling. The marking medium shall be an approved black ink. The legend and size of characters shall be as follows:

Legend	Minimum size of characters
Gloves, Permeable, Cloth, Cotton, Olive Green	3/8 inch
Not Impregnated	3/8 inch
Contract No.	3/8 inch
Stock No.	3/8 inch
Size - SMALL, MEDIUM or LARGE 1/	3/4 inch

1/ As an alternate, size may be marked S, M, or L.

The marking shall also include the information required by the applicable products labeling act. The marking shall show good fastness to laundering when tested in accordance with AATCC No. 61 Test IVA.

Label/tag. Each item shall be individually bar-coded with the type VIII, class 17 label/tag of DDD-L-20. This label/tag shall be located so that it is completely visible on the item when it is folded and/or packaged as specified and causes no damage to the item.

Patterns. The government shall furnish a single size pattern. The contractor is responsible for grading patterns for additional sizes. The pattern generally provides for a seam allowance of 1/8 inch for joining seams. Commercial patterns may be used in lieu of the government furnished pattern provided they conform to the cited design and finished measurements.

Workmanship. The finished gloves shall conform to the quality of product established by this document. The occurrence of defects shall not exceed the contractor's own quality assurance standards and the quality assurance standards defined by the technical data in the bid package.

Product demonstration model. When required, offerers shall submit samples of their intended production. The product demonstration model will consist of units independently developed. Product demonstration models will be analyzed and

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

evaluated by the Government. Evaluation criteria and basis for award are contained in the solicitation. Product demonstration models will be retained by the Government. One (1) product demonstration model approved by DPSC under the resultant contract will serve as a manufacturing standard for the corresponding production items delivered under this contract. Offerers are advised that the product demonstration model does not relieve the successful offerer of his responsibility to perform in accordance with the commercial item description specified above.

Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

Quality assurance

Certification. The contractor shall certify that the product offered meets the salient characteristics and other requirements of this description and that the product conforms to the producer's own drawings, specifications, standards and quality assurance practices. The Government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract. Reliance on contractor quality assurance systems shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract.

Examination

Visual examination. The lot shall be examined for the defects listed below. The lot size shall be expressed in units of gloves. The sample unit is one glove and the selection shall be by pairs.

Defects. The gloves shall be examined for the following defects:

Defect	Classification	
	Major	Minor
Any hole, cut, tear	X	
Run or drop stitch, end out	X	
Needle chew	X	
Abrasion marks	X	
Knots, slubs, burrs		X
Open seams	X	
Wrong type stitch		X
Pairing (not properly mated)	X	
Color not as specified		X
Any spot or stain (outside)	X	
Thread ends not removed		X
Label missing, incorrect, or illegible		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

Bar code defects. Bar code omitted or not readable by scanner; human-readable interpretation (HRI) omitted or illegible; not visible on folded, packaged item; causes damage to the item.

Dimensional examination. The finished gloves shall conform to the dimensions specified. Any dimension that is not within the established tolerance shall be classified as a defect. The sample unit shall be one glove.

Packaging examination. The fully packaged shipping containers shall be examined in accordance with defects listed below. The lot size shall be the number of shipping containers in the inspection lot.

EXAMINE	DEFECT
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, or method of application
Materials	Any component missing, damaged, or not as specified
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, improper taping, or inadequate stapling
Content	Number of items in container is more or less than required
	NSN shown on one or more items not as specified on shipping container
Palletization	Length, width, or height exceeds specified maximum requirements
	Pallet type not as specified
	Load not bonded as specified

Preservation, packing, and marking. The preservation, packing, and marking shall be as specified in the contract or order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

Source of Government documents. Copies of military and Federal documents are available from:

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

Sources of non-Government documents

ASTM Test Methods

(Applications for copies should be addressed to American Society For Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

AATCC Test Methods

(Applications for copies should be addressed to American Association of Textile Chemists and Colorists (AATCC), P.O. Box 12215, Triangle Park, NC 27709-2215)

Custodians:

ARMY - GL
NAVY - NU
AIR FORCE - 99

Review Activities:

ARMY - MD
AIR FORCE - 45, 82

User Activities:

NAVY - MC, YD

Civil Agency Coordinating Activity:
GSA - FSS

Preparing Activity:
DLA - CT

Project No. 8415-0927

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

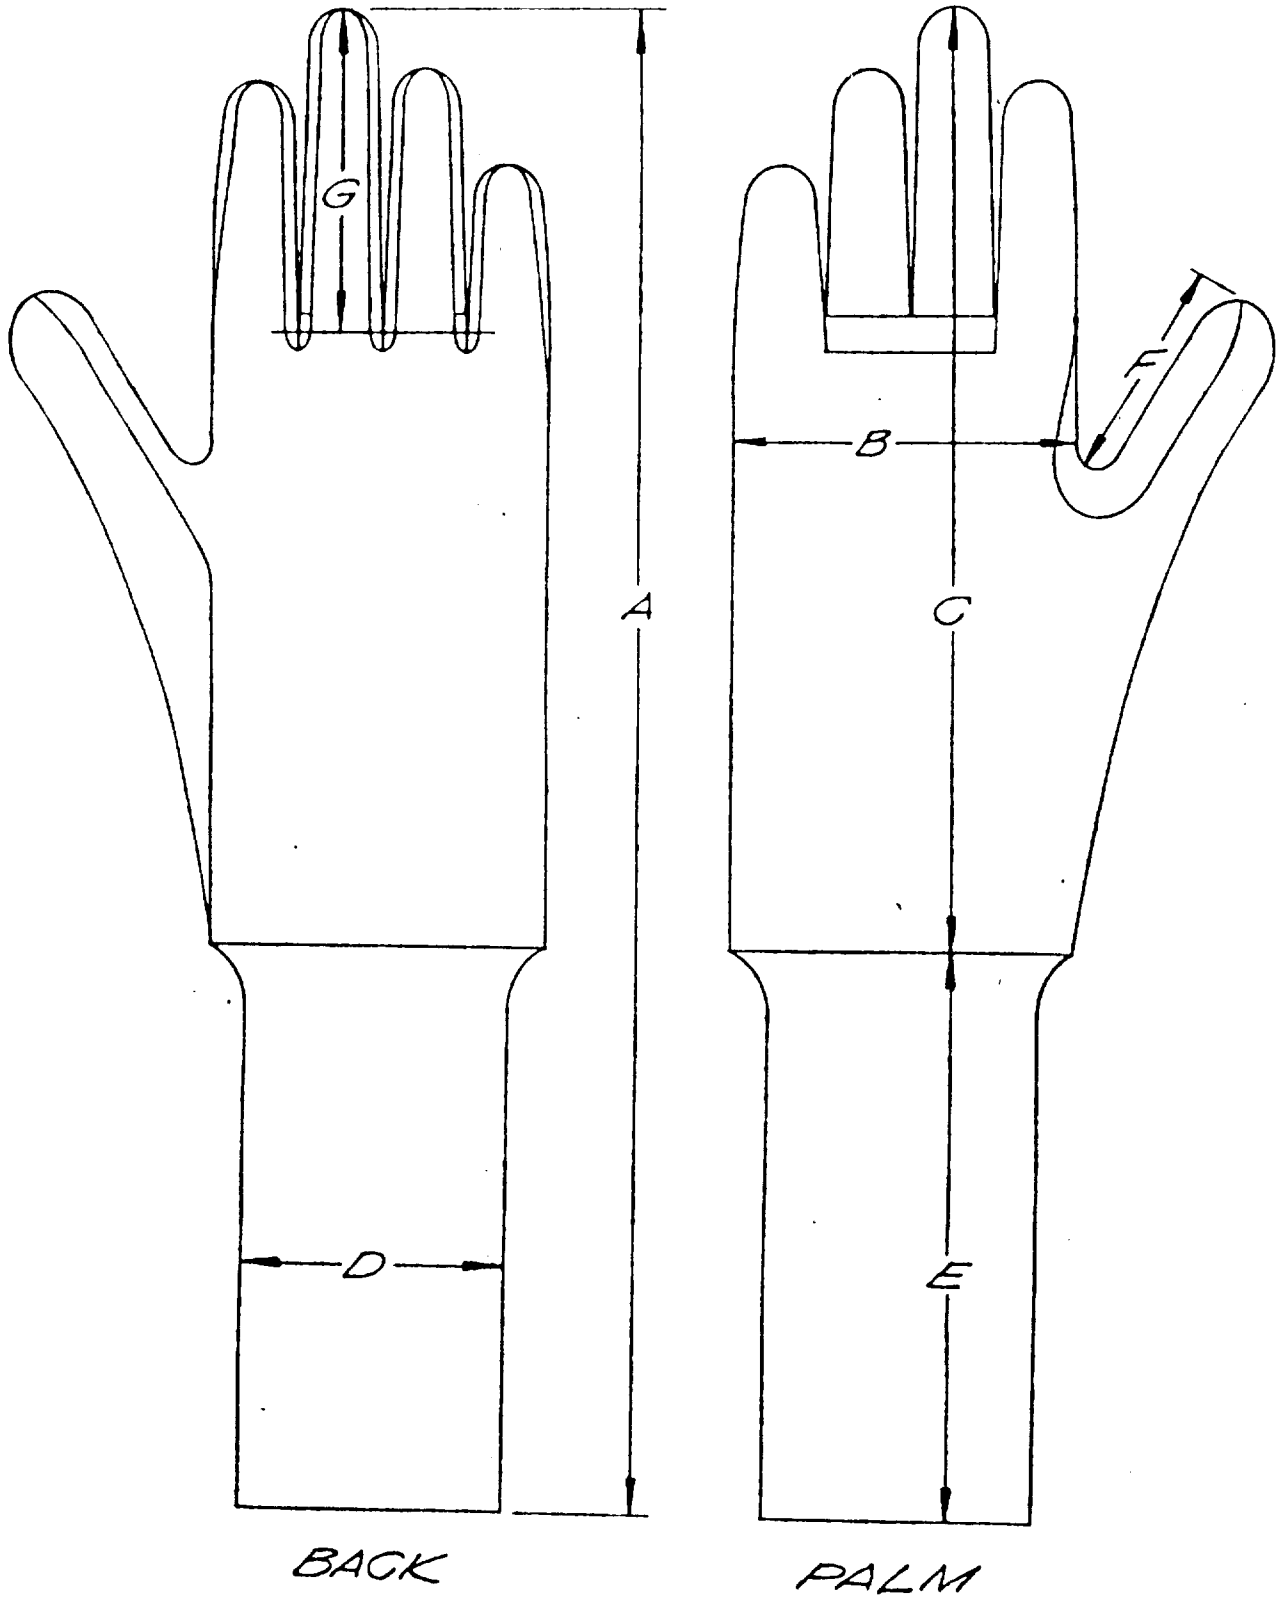


FIG. 1 - GLOVES, CLOTH, COTTON

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2. 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	A-A-55213	02 NOVEMBER 1993

3. DOCUMENT TITLE

GLOVES, PERMEABLE, CLOTH, COTTON, OLIVE GREEN

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME *(Last, First, Middle Initial)*	b. ORGANIZATION	
c. ADDRESS *(Include Zip Code)*	d. TELEPHONE *(Include Area Code)* (1) Commercial (2) AUTOVON *(If applicable)*	7. DATE SUBMITTED *(YYMMDD)*

8. PREPARING ACTIVITY

a. NAME Defense Personnel Support Center ATTN: DPSC-FSSD (12-3-D)	b. TELEPHONE *(Include Area Code)* (1) Commercial (2) AUTOVON
c. ADDRESS *(Include Zip Code)* 2800 South 20th Street P. O. Box 8419 Philadelphia, Pennsylvania 19101-8419	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.