INCH-POUND

A-A-55226B
January 13, 2026
SUPERSEDING
A-A-55226A
October 23, 1996

COMMERCIAL ITEM DESCRIPTION

SCARF, NECKWEAR, WOOL AND SCARF, HEADOVER, WOOL

The General Services Administration has authorized the use of this Commercial Item Description (CID) by all Federal agencies.

1. SCOPE. This CID covers the requirements for a one (1) size scarf, neckwear, wool and scarf, headover wool intended for use by personnel of the Department of Defense.

1. CLASSIFICATION. The scarf shall be of the following types and classes:

2.1 Types.
Type I - Neckwear
Type II - Headover

2.1.1 Classes.
Class 1- Olive Green 208 (U.S. Army Green)
Class 2 - DELETED
Class 3 - DELETED
Class 4 - Blue 3346 (U.S. Navy Blue)
Class 5 - Black 1638 (Air Force Black)

3. SALIENT CHARACTERISTICS.

3.1 Descriptions.

3.1.1 Type I, neckwear. The Type I scarf shall be a tubular seamless type, with open ends. The ends shall be reinforced with a single layer of tape around both ends of the scarf and overlock stitched 12-16 stitches per inch. The tape ends shall overlap no less than 1/2 inch and shall be bartacked to the scarf.

Beneficial comments, recommendations, additions, deletions, clarifications, and suggestions, or questions on this document should be sent to trpsptctstandardiz@dla.mil. Since contact information can change, verify the currency of the address information using ASSIST online database https://assist.dla.mil.

AMSC N/A FSC 8440

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

3.1.2 Type II, headover. The Type II scarf shall be a tubular knit type, with hemmed ends. The ends shall be finished with a double chain stitch (402 or 406) 10-14 stitches per inch.

3.1.3 Figure. Figure 1 is furnished for required methods of measuring. To the extent of any inconsistencies between the written document and the figure, the written document shall govern.

3.2 Material.

3.2.1 Basic material. The basic material for the scarf shall be a flat jersey knit tube made on circular machine using two (2) ends of 2-ply worsted yarn in each feed. The wool yarn for knitting and for overedging the ends of the scarf shall be mothproofed, 2-ply worsted yarn made of fleece or pulled sheep's wool, or a combination of both, not lower in grade than 56's US Standard. The face (wale side) of the fabric shall have a lightly brushed finish on both sides of the scarf. The basic material shall conform to the requirements specified in Table I.

TABLE I. Basic material requirements.

Characteristic	Requirements	Test Methods
Fiber content, wool, percent (dry weight), Minimum	95	AATCC TM20A (see 7.6)
Weight, oz./yd ^{2} Minimum Type I Type II	 6.0 2.8	ASTM D3776/D3776M, Opt. C
Yarns per inch Minimum Wales Courses	 8 10	ASTM D8007
Bursting strength lbf/in.^{2} (psi), Minimum	60	ASTM D6797
Colorfastness to Minimum Laundering (color change and staining) Perspiration Light Crocking (wet and dry)	 4.5 3.5 3.5 3.5	 AATCC TM61, Test 1A 1/ AATCC TM15 1 AATCC TM16.3, Opt. 3 2/ AATCC TM8 3/
Dimensional change, percent maximum, (after 1 laundering cycle) Wales / Courses	 13	 AATCC TM150 4/
Mothproofing, weight percent on wool	See 3.4	5/

1/ Rated using AATCC EP1, Evaluation Procedure for Gray Scale for Color Change and AATCC EP2, Evaluation Procedure for Gray Scale for Staining.
2/ Rated using AATCC EP1, Evaluation Procedure for Gray Scale for Color Change.
3/ Rated using AATCC EP8, Evaluation Procedure for AATCC 9-Step Chromatic Transference Scale.
4/ Hand wash at 105°F and lay flat to dry. The dimensional change requirement refers to both shrinkage (-) and growth (+).
5/ The mothproofing shall be evaluated according to the test methods and requirements of MIL-DTL-43665.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

3.2.2 Color. The color shall be as specified in the contract or purchase order (see 7.8). The finished scarf shall be a good match to the standard sample for shade and appearance and shall be equal to or better than the standard sample with respect to all characteristics for which the standard sample is referenced (see 7.4).

3.2.2.1 Visual shade matching. The color and appearance of the scarf shall match the standard sample when viewed using the AATCC EP 9, Option C, (see 7.5) with a primary light source simulating the spectral quality of average daylight, CIE Illuminant D65, with a color temperature of 6500 (± 200) Kelvin (K) illumination of 100 (± 20) foot candles. Alternatively, the color and appearance of the scarf shall match the standard sample with a primary light source simulating artificial daylight, CIE Illuminant D75, with a color temperature of 7500K (± 200) illumination of 100 (± 20) foot candles in lieu of D65. (See 7.5.1). The scarf shall also be a good match to the standard sample with a secondary source simulating the spectral quality of incandescent lamplight, CIE Illuminant A, with a color temperature of 2856K (± 200).

3.3 Requirements. The finished scarf shall conform to the physical and colorfastness requirements specified in Table I when tested in accordance with test methods in Table I.

3.3.1 Labile sulfur. The use of dyes and compounds containing sulfur capable of oxidation to sulfuric acid is prohibited. The cloth shall be "Free" of labile sulfur when tested as specified in 3.3.1.1.

3.3.1.1 Presence of labile sulfur test. Two (2) 1.50 (± 0.01) gram samples from each sample unit shall be tested. Each of the two (2) samples shall be cut into very small pieces and placed into separate test tubes. Prepare an acidic tin (II) chloride (stannous chloride) solution by dissolving 100 g $SnCl_2$ (ACS grade) in 100 mL of 35 percent hydrochloric acid (ACS grade) and adding the mixture to 50 mL of distilled water. Prepare a lead acetate solution by dissolving 5.0g of lead acetate (CP reagent grade) in a small amount of distilled water and diluting to a total of 100 mL. If the solution is not clear, add a few drops (one at a time) of glacial acetic acid until the solution is clear. The samples shall be submerged in the acidic tin (II) chloride solution. A filter paper wet out with the lead acetate solution shall be placed over the top of the test tube. The test tube containing the textile sample, tin (II) chloride and wet filter paper shall be heated over a low flame until the solution is boiling. The solution should not be heated for more than 15 seconds. A brown to black stain on the filter paper should be evaluated as follows:

Free - The filter paper shows no discoloration or staining of any kind.
Slight - The filter paper shows a light tan to light brown discoloration stain.
Moderate - The filter paper shows a dark brown discoloration stain.
Severe - The filter paper shows a black color stain.
The rating shall be recorded. The results shall be recorded as "pass" or "fail.

3.4 Mothproofing. The mothproofing of the wool material shall be accomplished and tested as specified in MIL-DTL-43665.

3.5 Thread. The thread for seaming and stitching shall be 40 Tex, 3-ply in accordance with Type I of A-A-52094. The color of the thread shall be a good match to the basic material color.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

3.6 Tape. The cotton tape for reinforcing the scarf ends shall be a 1/4 (± 1/32) inch wide in accordance with Type I of A-A-52071. The color of the tape shall be a good match to the basic material color.

3.7 Combination identification, and instruction label. Each scarf shall have a combination identification, and instruction label in accordance with Type VI, Class 15 of MIL-DTL-32075. The Type I scarf shall have a label sewn to the inside, with the top of the label positioned 1/2 (± 1/8) inch below and parallel to the edge. The Type II scarf label shall be sewn on all sides, located on the inside center back hem just below the collar and attached in the hem stitches. The label shall contain the following information:

ITEM NAME:
FIBER CONTENT: 95 PERCENT WOOL/5 PERCENT COTTON
CONTRACT NUMBER:
NATIONAL STOCK NUMBER (NSN)
FUR, WOOL OR FIBER PRODUCTS ACT INFORMATION
CONTRACTOR'S NAME:

DRY CLEAN OR HANDWASH GENTLY, IN LUKEWARM SUDS. DO NOT TWIST OR WRING. DRY ON FLAT SURFACE AWAY FROM HEAT. DO NOT TUMBLE DRY.

3.7.1 Barcode hang tag. Each scarf shall have a barcode label/hangtag conforming to Type VIII, Class 17 of MIL-DTL-32075. The bar coding element shall be a 13-digit National Stock Numbers (NSNs). There shall be a 12-digit Universal Product Code (UPC) number assigned for all NSNs by the contracting activity. The initials "UPC" must appear beneath the code. The barcode for NSN and UPC type shall be a medium to high density and shall be located so that it is completely visible on the scarf when it is folded and/or packaged as specified and so it causes no damage to the scarf.

3.8 Finished measurements. The finished scarf shall conform to the measurements in Table II below.

TABLE II. Finished measurements (inches). 1/

Characteristic	Measurement		Tolerance	
	Type I	Type II	Type I	Type II
Width (W)	9	9	± 1/2	± 1
Length (L)	54	24	± 1-1/2	± 1

1/ Unless otherwise specified the scarf shall be pressed flat with the label centered (±) 1 inch when the measurements are taken. The methods of measuring are referenced in Figure 1 below.

THIS SPACE INTENTIONALLY LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

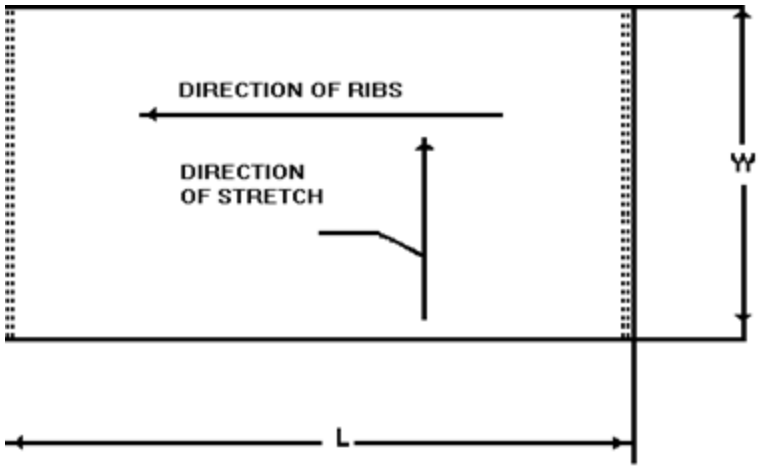


FIGURE 1. Scarf, Neckwear, Wool and Scarf, Headover, Wool – Methods of Measuring.

3.9 Toxicity. Unless otherwise specified in the contract or procurement documents, the finished scarf shall not present a health hazard and shall show compatibility with prolonged, direct skin contact when tested as specified in 3.9.1.

3.9.1 Toxicity test. When the toxicity requirement (see 3.9) can be demonstrated with historical use data, on the finishing treatments used, toxicity testing may not be required (see 7.1.4).

3.10 Workmanship. The finished scarf shall conform to the quality of the product established in this document. The scarf shall be free from defects which would affect its serviceability, appearance, uniformity and quality assurance standards defined by the technical data in the procurement documents.

4. REGULATORY REQUIREMENTS. Unless otherwise specified, the offeror/contractor is encouraged to use recovered, recycled, bio based, and environmentally preferable materials to the maximum extent practicable, in accordance with paragraph 23.403, 23.404(b) of the Federal Acquisition Regulation (FAR), or the sustainable acquisition of EO 13834; as applicable. (See 7.1.2).

5. PRODUCT CONFORMANCE PROVISIONS

5.1 Product conformance. The scarf shall meet the salient characteristics of this CID conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The Government reserves the right to require proof of such conformance.

5.2 Market acceptability. The finished scarf offered must have been sold to the government or commercial market.

5.3 End item inspection procedures. Sampling for inspection shall be conducted in accordance with ASQ/ANSI Z1.4 – Sampling Procedures and Tables for Inspection of Attributes (see 7.3.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

5.4 Visual examination. Each finished scarf shall be examined for the defects listed in Table III as defined in ASTM D3990. The lot size shall be expressed in units of each scarf in the lot. The sample unit shall be one (1) scarf.

TABLE III. Visual examination defects.

Material defects: Any hole, cut, tear, permanent fold, pleat, or crease; any spot or stain on outside, discoloration or color not as specified, any outwardly visible part shaded, any serious material defects or objectionable odor.
Stitches, seams and stitching: Loose or tight stitching tension, broken or skipped stitches, needle chew, any part caught in an unrelated operation or stitching, raw edge, thread ends not removed, any seam slippage, re-stitching, pleating or puckering; distorted, open, pulled or snagged stitches, twisted, ragged or inconsistent edge and tape ends not bartacked.
Workmanship: Any component part missing, dimension of item not as specified; design not as specified. Failure to meet product conformance; serviceability, reliability and quality of materials as defined by this document.
Labels: Label(s) missing, incorrect, or illegible; bar code or UPC code label omitted or not readable by scanner; human-readable interpretation (HRI) omitted or illegible; bar code not visible on folded packaged item, bar code label causes damage to the item.
Packaging: Not packaged in accordance with the contract or procurement documents.

5.5 Acceptance criteria. Acceptance criteria shall be as specified in the contract or procurement documents.

6. PACKAGING. The preservation, packing and marking shall be as specified in the contract or order (see 7.8).

7. NOTES.

7.1 Source of Government documents.

7.1.1 Copies of Government documents are available online at https://quicksearch.dla.mil.

7.1.2 EPA information is available online at https://www.epa.gov and EO 13834 information is available online at https://www.fedcenter.gov/.

7.1.3 Federal Acquisition Regulations (FAR) are available online at https://acquisition.gov.

7.1.4 Toxicity testing. If dermal toxicity testing is required, it will be conducted in accordance with Title 40, Protection of Environment, Code of Federal Regulations current edition and applicable sections, which are also consistent with the following OECD tests:

Skin Sensitization 406 and Dermal Irritation 404 (https://www.oecd-ilibrary.org/environment/oecd-guidelines-for-the-testing-of-chemicals-section-4-health-effects_20745788?page=1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

Dermal Sensitization (https://www.law.cornell.edu/cfr/text/40/798.4100).

Dermal Toxicity (https://www.law.cornell.edu/cfr/text/40/798.2250).

7.2 Source non-Government documents.

7.2.1 AATCC Test Methods are available for purchase online at https://aatcc.org.

7.2.2 ASQ/ANSI Z1.4 - Sampling Procedures are available online at https://asq.org.

7.2.3 ASTM Standards are available for purchase online at https://www.astm.org.

7.3 Intended use. The scarf is intended to be used for warmth, protection from the elements, and as a first aid tool.

7.4 Standard samples. For access to standard shade samples of the material, address the contracting activity issuing the invitation for bids or request for proposal.

7.5 Visual shade matching. In 2017, Option A of AATCC EP9 was changed to Option C. NOTE: In case of confusion, the viewing geometry should be "The specimen plane and illumination source will be parallel to each other and aligned so that the light flux is incident at the center of the specimen plane, which is set at a 35 (± 5º) angle relative to the horizontal. The observer will view the specimens at a 90º angle, relative to the plane of the specimens.

7.5.1 In 2022, the U.S. Military (All Services) accepted D65 as the new preferred light source for visual shade matching due to the supply chain issues with D75. DD1222's should reflect which light source is used. If the light source is not indicated on the DD1222, D65 will be assumed by the Government Shade Laboratory.

7.6 Certificate of compliance. The contracting activity may select to accept a certificate of compliance for a stated requirement.

7.7 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to previous issues due to the extensiveness of the changes. This CID is to be used in preference to MIL-S-2063. The colors deleted and added are as follows:

Class 2 – Gray 1155 (DELETED)
Class 3 – Skipped, never added (DELETED)
Class 5 – U.S. Black 1638 (Air Force Black) (ADDED)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

7.8 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this CID.
b. Types and classes required (see 2).
c. Color required (see 3.2.2).
d. When toxicity testing is required (see 3.9 and 3.9.1).
e. Product conformance (see 5.1).
f. Acceptance criteria (see 5.4).
g. Packaging requirements (see 6).

7.9 National Stock Numbers (NSNs). The following is a list of NSNs assigned that correspond to this CID. This list may not be indicative of all possible NSNs associated with the CID and are provided for reference only.

NSNs	Color
8440-00-823-7520	U.S. Army Green 208
8440-01-523-5765	Air Force Shade Black 1638
8440-01-005-2558	U.S. Navy Blue 3346

7.10 Key words.

Headgear
Neck Gaiter

MILITARY INTERESTS:

CIVIL AGENCY COORDINATING ACTIVITY:
GSA – FAS

Custodians:
Army - GL
Navy - NU
Air Force - 11

Preparing activity:
DLA - CT

Review activity:
Navy - CG

(Project: 8440-2026-003)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.