INCH-POUND
A-A-55229A
May 7, 2020
SUPERSEDING
A-A-55229
September 17, 1993

COMMERCIAL ITEM DESCRIPTION

RAINCOAT, MAN'S

The General Services Administration has authorized the use of this commercial item description (CID) by all Federal Agencies.

1. SCOPE. This commercial item description covers the requirements for man's raincoats intended for wear by military personnel of the Department of Army.

2. CLASSIFICATION. The raincoat shall be of one (1) type in the following sizes:

2.1 Sizes.

Schedule of sizes.

X-Short (XS)	Short (S)	Regular (R)	Long (L)	X-Long (XL)
	30	30	-	-
32	32	32	32	-
34	34	34	34	34
36	36	36	36	36
38	38	38	38	38
40	40	40	40	40
42	42	42	42	42
-	46	46	46	46
-	-	48	48	48

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to: Attn: DLA Troop Support, 700 Robbins Avenue, Philadelphia, PA 19111-5096. Since contact information can change, verify the currency of the address information using Acquisition Streamlining and Standardization Information System (ASSIST) online database https://assist.dla.mil.

AMSC N/A FSC 8405

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

SALIENT CHARACTERISTICS.

3.1 Description. The raincoat (see Figures 1and 2) shall have a double-breasted front with six (6) button closure, a belt with buckle, trench-type model with a convertible collar, two vertical welt pockets with pass thru slits, set-in sleeve with wrist tabs, shoulder loops, a button down right front storm shield (gun patch), a storm tab inside the lower left front, a two (2) piece back with a center pleat.

3.1.1 Seams and stitches. The sleeve tabs, storm tab, shoulder loops, bottom of front shield, collar, and welt pockets shall be topstitched 3/8-inch from turned edges. The coat bottom hem shall be topstitched 1 (±1/8) inch, the belt shall have two (2) rows of top stitching 3/8-inches apart with outside edge stitch 1/16 to 3/32-inch from the edge. The sleeve outseam, side seams, center back seam shall be lapped seams with a 3/8 inch topstitch, on the front arm, back side seam and left back respectively. The front edge, lapel and bottom edge to back edge of facing shall be topstitched 3/8 inch from turned edge. The shoulder seam shall be topstitched on back shoulder, 1/4 inch from seam. The under arm seam of the sleeve shall be a double-lapped, double-stitched seam, 3/16 to 1/4-inch gage. The back pleat insert has a 1/4-inch seam.

3.1.2 Buttons and buttonholes. The buttons shall be 4-hole sewing buttons of melamine formaldehyde composition, glossy finish; style 20, 24-ligne and 45-ligne; and style 15, 18-ligne (stay buttons). There shall be three (3) 45-ligne buttons on the right front. The top two (2) buttons shall be sewn through all plies with stay buttons (18-ligne). The bottom button shall be sewn through the front and top ply of the pocket. One (1) 45-ligne button on the right front shall be sewn through all plies with a stay button to correspond with buttonhole on left lapel when coat is buttoned at neck. There shall be three (3) 45-ligne buttons on the left front. The top button shall be sewn through all plies through a 45-ligne button on the facing side with buttons back to back. The center button shall be sewn through all plies with a stay button. The bottom button shall be sewn through the front and top ply of the pocket. The sleeve tabs, storm tab, and shoulder loops shall have 24-ligne buttons to correspond with buttonholes. One (1) 24-ligne button shall be sewn to the underside of the belt (toward center) to correspond to the buttonhole in the belt safety strap. The button color shall be a good match to the basic material. The buttonholes shall be eyelet-end, square-bar, cut-first type, worked over gimp with the ends of the gimp pulled through the underside. The ends shall be bartacked. Bartacking shall be 3/8 to 1/2-inch long and 1/16 to 3/32-inch wide and shall be free from thread breaks and loose stitching.

3.1.3 Belt and buckle. The belt shall finish 2-1/4 (+ 1/16, - 1/8) inches wide (see Fig. 3). The coat shall have four (4) belt loops; one (1) on each front above the pocket welt and one (1) on each side seam. The belt loops shall finish 3 to 3-1/4 inches straight. There shall be one (1) belt keeper loop on the left side 5-3/4 to 6-inches long. There shall be one (1) double loop on the belt and one (1) belt safety strap 6-7/8 to 7-inches long on the underside of the belt attached 16-1/2 (± 1/2) inches from the buckle. Purling of the buttonhole on the belt safety strap shall finish away from the belt. The plastic buckle shall be the slide-type shown in Figure 3 and shall conform to the dimensions specified in Figure 3. The plastic buckle color shall be a close match to the basic material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

3.2 Visual Shade matching. The color and appearance of the material shall match the standard sample when viewed using the AATCC EP9, Evaluation Procedure for Visual Assessment of Color Difference of Textiles, Option C (see 7.6), with sources simulating artificial daylight D75 illuminant with a color temperature of 7500 (± 200)K illumination of 100 (± 20) foot candles, and shall be a good match to the standard sample under incandescent lamplight at 2856 (± 200)K.

3.3 Materials.

3.3.1 Basic material. The basic material shall be a plain weave, water repellent, polyester/cotton blend, poplin cloth that conforms to the physical requirements specified in Table I when tested in accordance with the methods cited in Table I. The color shall be Blue 358. The finished cloth shall match the standard sample for shade and appearance and shall be equal to or better than the standard sample with respect to all characteristics for which the standard sample is referenced. The use of dyes and compounds containing sulfur capable of oxidation to sulfuric acid is prohibited. The cloth shall be "Free" of labile sulfur when tested as specified in 3.3.2.

TABLE I. Physical requirements.

Characteristic	Requirement	Test Method
Fiber content, percent		
Polyester	65 (± 3)	AATCC TM20A (see 7.7)
Cotton	35 (± 3)	AATCC TM20A (see 7.7)
Ply		
Warp	Single or 2 ply	Visual 1/
Filling	Single yarn	Visual 1/
Weave	Plain	Visual 1/
Weight, oz./sq.yd.	5.3- 6.8	ASTM D3776/D3776M
Yarns per inch (min.)		
Warp	108	ASTM D3775
Filling	68	ASTM D3775
Air permeability cu.ft./min./sq.ft. (max.)	10	ASTM D737
Breaking strength, pounds (min.)		
Warp	185	ASTM D5034
Filling	70	
Tearing strength, pounds (min.)		
Warp	5.0	ASTM D1424
Filling	2.0	
Dimensional stability, percent (max.)		
Warp	2.0	AATCC TM135 (1)V(A)iii
Filling	2.0	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

TABLE I. Physical requirements. - Continued

Characteristic	Requirement	Test Method
Colorfastness (min.):		
Laundering (after three (3) cycles)		
Color Change and Staining	3-4	AATCC TM61 Test 2A 2/, 3/
Perspiration		
Color Change and Staining	3-4	AATCC TM15 3/
Crocking (Wet, Dry)	2.5	AATCC TM8 4/
Dry Cleaning	3-4	AATCC TM132 3/
Lightfastness (after 40 AFU or 170 kJ/(m^2nm)@420 nm)	3-4	AATCC TM16.3. Opt 3 5/
pH	5.0 - 8.5	AATCC TM81
Spray rating (min.)		
Initial	100, 100, 90	AATCC TM22
After one (1) dry cleaning	70, 70, 70	AATCC TM58 & AATCC TM22
Dynamic absorption, percent (max.)		
Initial	18	AATCC TM70
After three (3) launderings	18	AATCC TM135 (1)V(A)iii & AATCC TM70 6/
Hydrostatic pressure, cm (min.)		
Initial	30	AATCC TM127
After three (3) launderings	25	AATCC TM135 (1)V(A)iii & AATCC TM127 6/
After one (1) drycleaning	25	AATCC TM158 & AATCC TM127
Resistance to organic liquid (min.) (N-tetradecane)		
Initial	No Wetting	AATCC TM118
After three (3) launderings	No Wetting	AATCC TM135 (1)V(A)iii & AATCC TM118 6/
Labile sulfur	"Free"	3.3.2
Toxicity	3.8	5.5

1/ One (1) determination shall be made from each sample unit and the results reported as "pass or "fail".

2/ For the color transfer cloth evaluation, only the stain on the cotton fibers of the color transfer cloth shall be evaluated.

3/ Rated using the AATCC EP 1, Evaluation Procedure for Gray Scale for Color Change and AATCC EP2, Evaluation Procedure for Gray Scale for Staining.

4/ Rated using the AATCC EP8, Evaluation Procedure for AATCC 9-Step Chromatic Transference Scale.

5/ Rated using the AATCC EP 1, Evaluation Procedure for Gray Scale for Color Change.

6/ Specimens shall be subjected to three (3) complete cycles (wash and dry) prior to determination of hydrostatic height, dynamic absorption and resistance to organic liquid after laundering.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

3.3.2 Presence of labile sulfur. In the determination of labile sulfur in textile materials with lead acetate, two (2) 1.50 gram (± 0.01) gram samples from each material submitted for evaluation shall be tested. Each of the two (2) samples shall be cut into very small pieces and placed into separate test tubes. The samples shall be submersed in a stannous chloride solution that contains 100 grams of stannous chloride crystals ACS in 100 millimeters of hydrochloric acid ACS (35 percent concentration) and 50 milliliters of distilled water. A filter paper wet out with a 5.0 percent lead acetate solution shall be placed over the top of the test tube. The lead acetate solution contains 5.0 grams of lead acetate CP reagent grade and enough distilled water to make up a 100 milliliter solution; if the solution is not clear, add a few drops (one at a time) of glacial acetic acid until the solution is clear. The test tube containing the textile sample, stannous chloride and wet filter paper shall be heated over a low flame until the solution is boiling. The solution should not be heated for more than 15 seconds. A brown to black stain on the filter paper should be evaluated as follows.

Free	- The filter paper shows no discoloration of staining of any kind.
Slight	- The filter paper shows a light tan to light brown discoloration stain.
Moderate	- The filter paper shows a dark brown discoloration stain.
Severe	- The filter paper shows a black color stain.

The rating shall be recorded. The results shall be recorded as “pass” or “fail”.

3.3.3 Fusible interlining. The material for interlining the pocket welts, facings, belt, wrist tabs, top collar, top collarstand, undercollar, storm shield, storm tab and shoulder loops, all known as “small parts” shall use a charcoal, nonwoven fusible interlining. It shall conform to either Type V or VI, Class 1, Style A or B: or Type VIII, Class 1, Style A, of MIL-C-44296. For optimum results, the fusible material manufacturer’s recommendations for fusing dwell time, pressure, and temperature, based upon the fusing equipment used and the basic material being fused, shall be utilized.

3.3.4 Thread. The thread shall be cotton, soft finish machine thread, conforming to A-A-52094, Type I, Tex 40, 3-ply and Tex 30, 2-ply for seaming and stitching. Sleeve setting, bartacks and top thread of buttonholes shall be Tex 60, 3-ply. Polyester cotton-covered thread conforming to Type I of A-A-50199, Tex size 36-45 may be used in lieu of the cotton thread. If polyester cotton-covered thread is used a 2-ply may be substituted for the 3-ply cotton. The thread shall be water repellent treated with a durable water repellent treatment. There shall be no noticeable crystallization of the treatment on the thread surface or any noticeable wicking of the treatment on the thread adjacent to material when sewn.

3.3.5 Gimp. The gimp for reinforcing the buttonholes shall be soft finish or glazed finish, Tex size 210, conforming to Type I or II of A-A-50198.

3.3.6 Color. The color of the thread and gimp shall match the standard sample for Blue AB (C.A. 66044).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

3.3.7 Colorfastness. All dyed threads shall show fastness to drycleaning and light equal or better than the standard sample. When no standard sample is available, the dyed thread shall show colorfastness to drycleaning equal to or better than "3-4" when tested in accordance with AATCC TM132 and rated according to AATCC EP1 and AATCC EP2.

3.4 Labels. Each raincoat shall have a size label, identification label, care instruction, and a bar coded hang tag. The size and identification label may be combined. The labels (except the bar coded tag) shall show colorfastness to drycleaning equal to or better than "3-4" when tested in accordance with AATCC TM132 and rated according to AATCC EP1 and AATCC EP2.

3.4.1 Size label. Each raincoat shall have a size label conforming to Type VI, Class 2 of MIL-DTL-32075. The size label shall be centered below the finished neck edge and stitched on all four (4) sides. The top edge of the size label shall be caught in the collar joining seam. The stitching shall not be through the printing.

3.4.2 Combination identification/care instruction label. When a combination identification and care instruction label is used, the combination label shall conform to Type VI, Class 15 of MIL-DTL-32075. The combination label shall be stitched on all four (4) sides to the back side of the right under pocket (to face the wearer), 1 (± 1/4)-inch below top edge and centered on the pocket (± 1/2). The contents of the care instructions shall be as follows:

RAINCOAT, MAN'S
Dry Clean Only
After each dry cleaning, professionally
retreat the raincoat with a water repellent treatment.

3.4.3 Bar coded hang tag. Each item shall be individually bar-coded with a paper tag for personal clothing items. The paper tag shall be standard bleached sulfate having a basis weight of 100 pounds. The paper used for the tags shall have a smooth finish to accept thermal transfer and direct printing. The tags shall have a hole and shall be attached to each item by a fastener, clearly legible and readable by a scanner. The bar coding element shall be a 13 digit National Stock Number (NSN). There shall be a 12 digit Universal Product Code (UPC) number assigned for all NSNs by the contracting activity. The initials "UPC" must appear beneath the code. The bar code for the NSN and the UPC type shall be a medium to high code density and shall be located so that it causes no damage to the item. This UPC code must also be placed on all shipping cartons on which the NSN appears.

3.5 Figures. Figures are furnished solely for guidance and information. Should variations from the written specification appear in the figures, the written specification shall govern.

3.6 Patterns. Standard patterns to be used for cutting the contractor's working patterns will be furnished by the Government. The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way, except that the additional notches for using during construction are allowed on the working patterns and when minor modifications are necessary when using automatic equipment. These modifications shall not alter the dimensional, serviceability, or appearance requirements cited in this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

The pattern generally provides for a seam allowance of 1/2-inch for top seam of sleeves, side seams, center back seam, and facing to yoke (lining) seam; 1/4-inch for back pleat insert, shoulder loops, sleeve tabs, welt to coat, hanging pockets; and 3/8-inch for all other seams. Commercial patterns may be used in lieu of the Government-furnished pattern provided they conform to the cited design and finished measurements.

3.6.1 List of pattern parts. The components of the raincoat shall be cut from materials as specified in accordance with the number of parts indicated in Table II.

TABLE II. List of pattern parts.

Material	Pattern Nomenclature	Pattern Abbreviation	Cut parts
Basic material (see 3.3.1)	FRONT	A-A-55229-FRONT	2
	BACK	A-A-55229-BACK	2
	FRONT SLEEVE	A-A-55229-FR-SLV	2
	BACK SLEEVE	A-A-55229-BK-SLV	2
	TOP COLLAR	A-A-55229-TP-COLLAR	1
	UNDER COLLAR	A-A-55229-U-COLLAR	1
	COLLARSTAND	A-A-55229-CO-STND	2
	FRONT FACING	A-A-55229-FRONT-FAC	2
	TOP SHIELD	A-A-55229-TOP-SHLD	1
	UNDER SHIELD	A-A-55229-UND-SHLD	1
	SHOULDER LOOP	A-A-55229-SH-LP	4
	SLEEVE TAB	A-A-55229-SLV-TAB	4
	STORM TAB	A-A-55229-STORM-TAB	2
	POCKET WELT	A-A-55229-PKT-WELT	2
	TOP POCKET	A-A-55229-TP-POCKET	2
	UNDER POCKET	A-A-55229-UNDER-PKT	2
	BELT	A-A-55229-BELT	1
	BACK YOKE	A-A-55229-BK-YOKE	1
	FRONT YOKE	A-A-55229-FRT-YOKE	2
	BACK PLEAT FACING	A-A-55229-BK-PLT-FC	1
	BUTTONHOLE REINFORCEMENT	A-A-55229-BTHL-REIN	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

TABLE II. List of pattern parts. - Continued

Material	Pattern Nomenclature	Pattern Abbreviation	Cut parts
Fusible material (see 3.3.3)	LAPEL FUSIBLE	A-A-55229-LPL-FUS	2
	SLEEVE TAB FUSIBLE	A-A-55229-SLEEVE-TAB-F	2
	TOP SHIELD FUSIBLE	A-A-55229-T-SHLD-F	1
	UNDER COLLAR FUSIBLE	A-A-55229-U-COL-F	1
	TOP COLLAR FUSIBLE	A-A-55229-TOP-COL-F	1
	COLLARSTAND FUSIBLE	A-A-55229-CO-STND-F	2
	STORM TAB FUSIBLE	A-A-55229-STRM-TB-F	1
	SHOULDER LOOP FUSIBLE	A-A-55229-SH-LP-F	2
	FRONT FACING FUSIBLE	A-A-55229-FRT-FAC-F	2
	BELT FUSIBLE	A-A-55229-BELT-FUS	1
	POCKET WELT FUSIBLE	A-A-55229-PKT-WLT-F	2

3.7 Finished measurements. The finished measurements of the raincoat shall conform to the measurements in Table III when measured as specified in Table IV.

SPACE LEFT INTENTIONALLY BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

TABLE III. Finished measurements (inches).

Size	1/2 Chest 1/	Sleeve Length 2/					Back Length 3/					Belt Length 4/
		XS	S	R	L	XL	XS	S	R	L	XL	
30	19-1/8	--	18	19	--	--	--	43-3/8	45-3/8	--	--	40-1/2
32	20-1/8	17	18	19	20	--	42-1/8	43-5/8	45-5/8	47-5/8	--	42-1/2
34	20-7/8	17	18	19	20	21	42-3/8	43-7/8	45-7/8	47-7/8	49-7/8	44-1/2
36	21-7/8	17	18	19	20	21	42-5/8	44-1/8	46-1/8	48-1/8	50-1/8	46-1/2
38	22-7/8	17	18	19	20	21	42-7/8	44-3/8	46-3/8	48-3/8	50-3/8	48-1/2
40	23-7/8	17	18	19	20	21	43-1/8	44-5/8	46-5/8	48-5/8	50-5/8	50-1/2
42	24-7/8	17	18	19	20	21	43-3/8	44-7/8	46-7/8	48-7/8	50-7/8	52-1/2
44	25-7/8	--	18	19	20	21	--	45-1/8	47-1/8	49-1/8	51-1/8	54-1/2
46	26-7/8	--	18	19	20	21	--	45-3/8	47-3/8	49-3/8	51-3/8	56-1/2
48	27-7/8	--	--	19	20	21	--	--	47-5/8	49-5/8	51-5/8	58-1/2
Tol.	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2	+1/2, -1	+1/2, -1	+1/2, -1	+1/2, -1	+1/2, -1	± 1

TABLE IV. Method of measuring.

1/	1/2 Chest	With coat buttoned measure from folded edge to folded edge in line with base of armhole.
2/	Sleeve length	Measure underarm seam from base of armhole to bottom of sleeve.
3/	Back length	Measure along center back seam from base of collar joining seam to bottom of coat.
4/	Belt length	Measure from point of finished belt to fold at buckle bar.

3.8 Toxicity. The cloth used on the finished item shall not present a health hazard and shall show compatibility with prolonged, direct skin contact when tested as specified in 5.5. Chemicals recognized by the Environmental Protection Agency (EPA) as human carcinogens shall not be used.

3.9 Workmanship. The finished raincoat shall conform to the quality of product established in this document. The raincoats shall be free from defects which would affect its serviceability, appearance and uniformity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

4. REGULATORY REQUIREMENTS. Unless otherwise specified, the offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. PRODUCT CONFORMANCE PROVISIONS.

5.1 Product conformance. The raincoats provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product that is offered for sale in the commercial marketplace. The Government reserves the right to require proof of such conformance.

5.2 Market acceptance. The raincoat offered, or generic equivalent, must have been sold to commercial market or the Government.

5.3 Visual examination. Each raincoat shall be examined for the defects listed in Table V. The lot size shall be expressed in units of raincoats. The sample unit shall be one (1) raincoat.

TABLE V. Visual examination defects.

Material defects Any hole, cut, abraded area, tear or rip; any spot or stain or foreign matter on outside. Color not as specified or not uniform due to discoloration, any shaded part when required to be cut from one (1) piece of material, any objectionable odor.
Seams and stitching Loose or tight stitching tension, broken or missing thread or stitch, needle chew or improper stitching; any open seams, any part caught in an unrelated operation or stitching; raw edge, thread breaks, thread ends not removed; pulled or snagged stitches.
Workmanship Distorted parts or poor workmanship Any component part omitted, any fusing delaminated, bubbling of any fused component, any strike through or bleed through or any resin transfer to raincoat, measurement of item not as specified; design not as specified.
Labels Label(s) missing, incorrect, or illegible; bar code omitted or not readable by scanner; human-readable interpretation (HRI) omitted or illegible; bar code not visible on folded, bar code label causes damage to the packaged item.
Packaging Not packaged in accordance with the contract or purchase order.

5.4 Dimensional examination. The finished raincoat shall conform to the dimensions specified in Table III when measured according to Table IV. Any dimension that is not within the established tolerance shall be classified as a defect. The sample unit shall be one (1) raincoat.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

5.5 Toxicity test. When required (see 7.2.3), an acute dermal irritation study and a skin sensitization study shall be conducted. When the results of the studies indicate the raincoat cloth is not a sensitizer or irritant, a Repeat Insult Patch Test shall be performed in accordance with the Modified Draize Procedure (see 7.2.3). If the toxicity requirement (see 3.8) can be demonstrated with historical use data, on the finishing treatments used, toxicity testing may not be required (see 7.5).

5.6 Acceptance criteria. Acceptance criteria shall be as specified in the contract or purchase order (see 7.5).

6. PACKAGING. The preservation, packing and marking shall be as specified in the contract or purchase order (see 7.5).

7. NOTES.

7.1 Source of Government documents:

7.1.1 Copies of Government documents are available online at https://quicksearch.dla.mil.

7.2 Source of non-Government documents.

7.2.1 AATCC Standards are available for purchase online at https://www.aatcc.org.

7.2.2 ASTM Standards are available for purchase online at https://www.astm.org.

7.2.3 Modified Draize Procedure (Repeat Insult Patch Test): Principles and Methods of Toxicology, A Wallace Hayes (editor)is available online at. https://www.crcpress.com.)

7.3 Intended use. The cloth is intended for use in the manufacturing of men's raincoats.

7.4 Standard samples. For access to standard shade samples of cloth and threads, address the contracting activity issuing the invitation for bids or request for proposal.

7.5 Ordering data. The contract or order should specify the following:

a. Title, number, and date of this commercial item description
b. Size requirements (see 2.1)
c. Color required (see 3.3.1)
d. When toxicity testing is required (see 3.8 and 5.5)
e. Product conformance provisions (see 5.1)
f. Acceptance criteria (see 5.6)
g. Packaging requirements (see 6.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

7.6 Visual shade matching. In 2019, Option A of AATCC Evaluation Procedure 9, Visual Assessment of Color Difference of Textiles was changed to Option C NOTE: In case of confusion, the viewing geometry should be "The specimen plane and illumination source will be parallel to each other and aligned so that the light flux is incident at the center of the specimen plane, which is set at a 35 (± 5º) angle relative to the horizontal. The observer will view the specimens at a 90º angle, relative to the plane of the specimens".

7.7 Certificate of compliance. The contracting activity may select to accept a certificate of compliance for the requirement stated.

7. Key words.

Clothing
Outerwear
Poplin
Water repellent

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

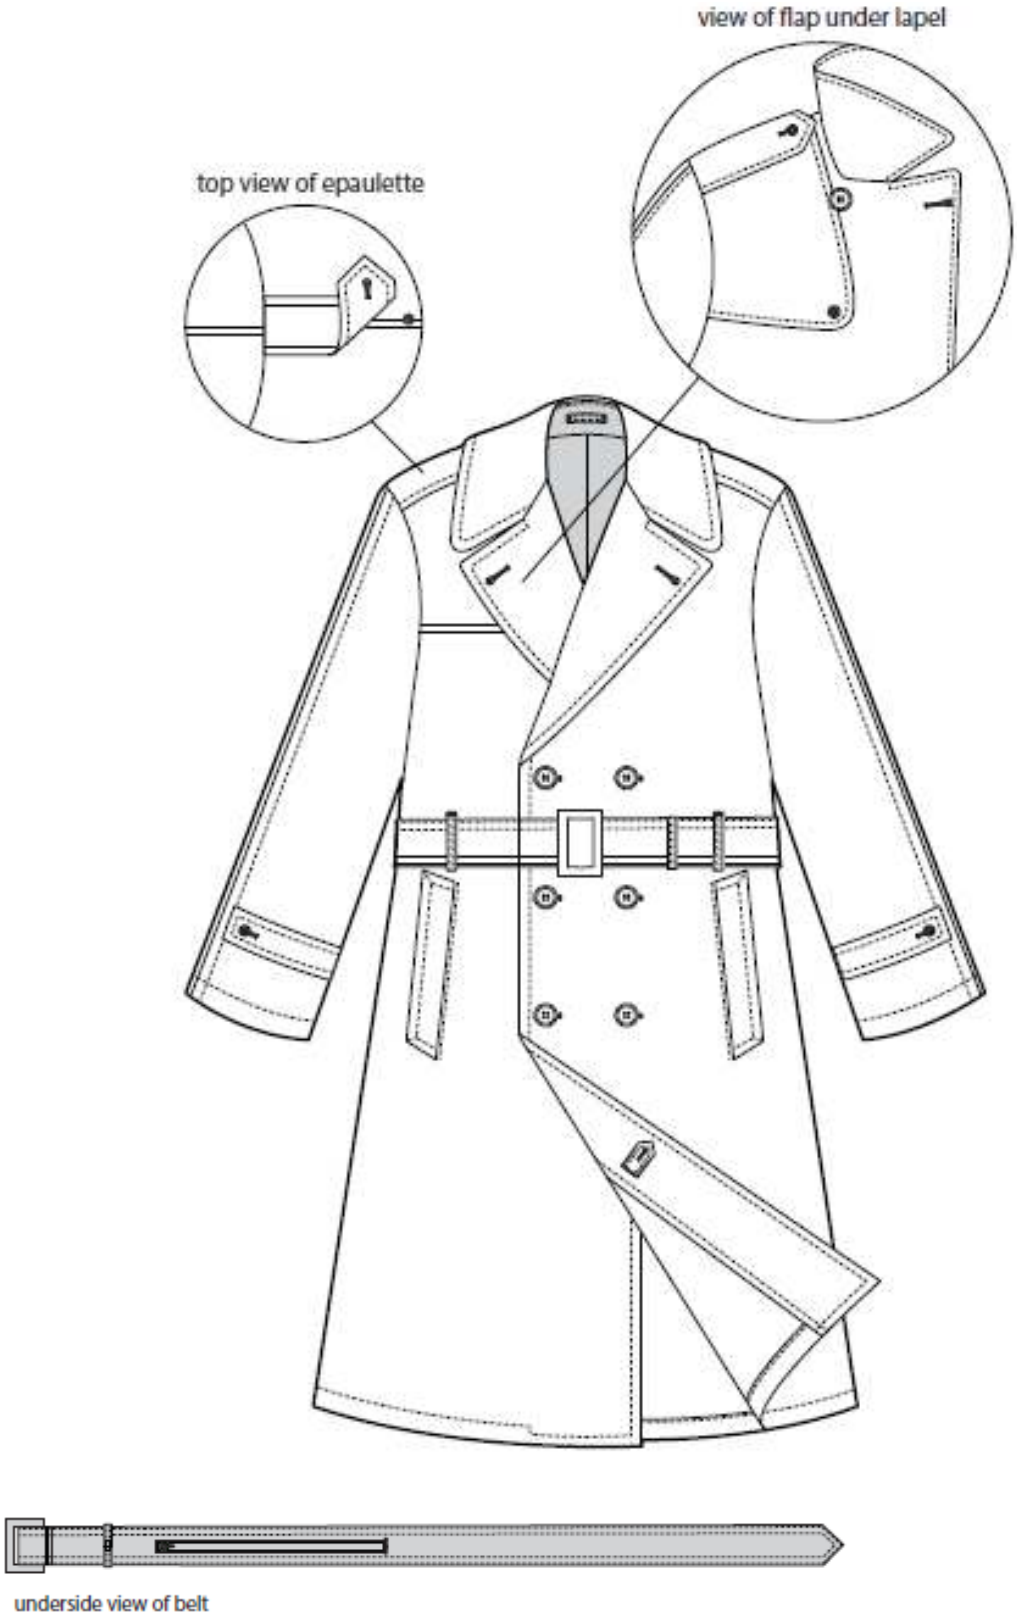


FIGURE 1. Front view, Raincoat, Man's.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

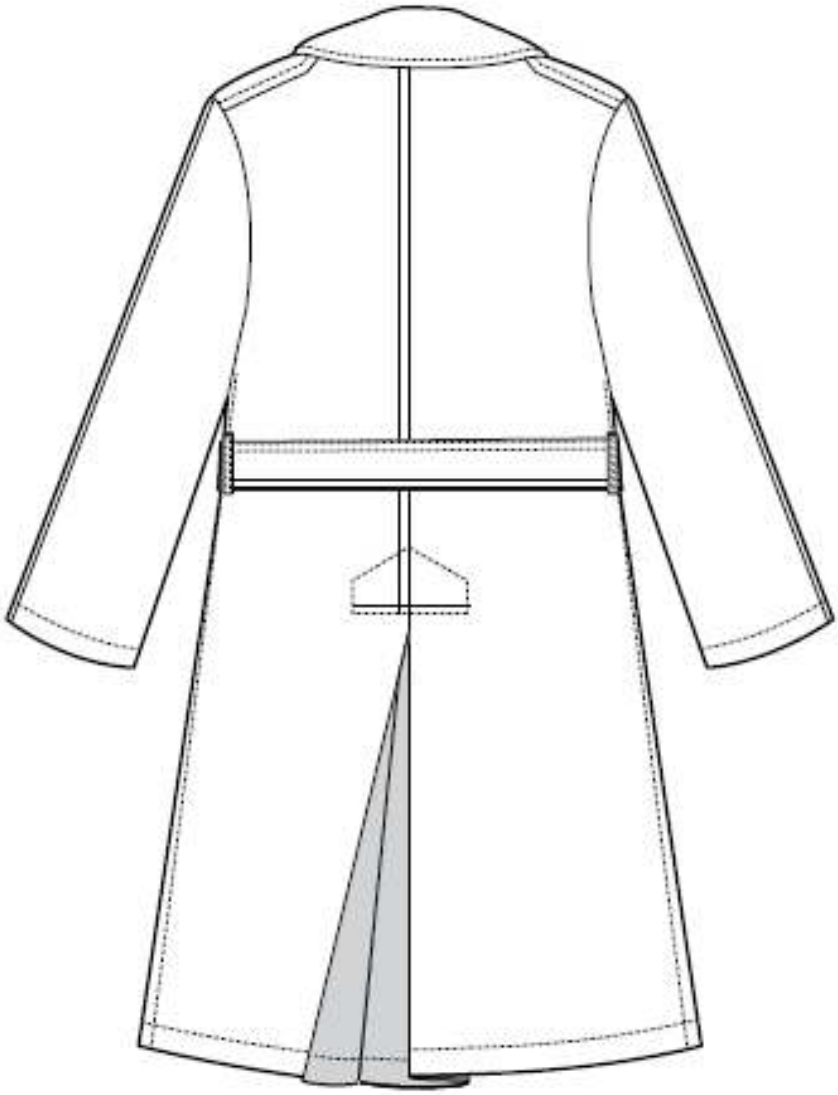


FIGURE 2. Back view, Raincoat, Man's.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

DIMENSIONS		
SIZE	A	B
2-1/4	2.875	2.250 +.010 -.040

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
FABRICATING TOLERANCES:
(WIRE & METAL GAGES EXCLUDED)
FRACTIONS DECIMALS ANGLES ±.010

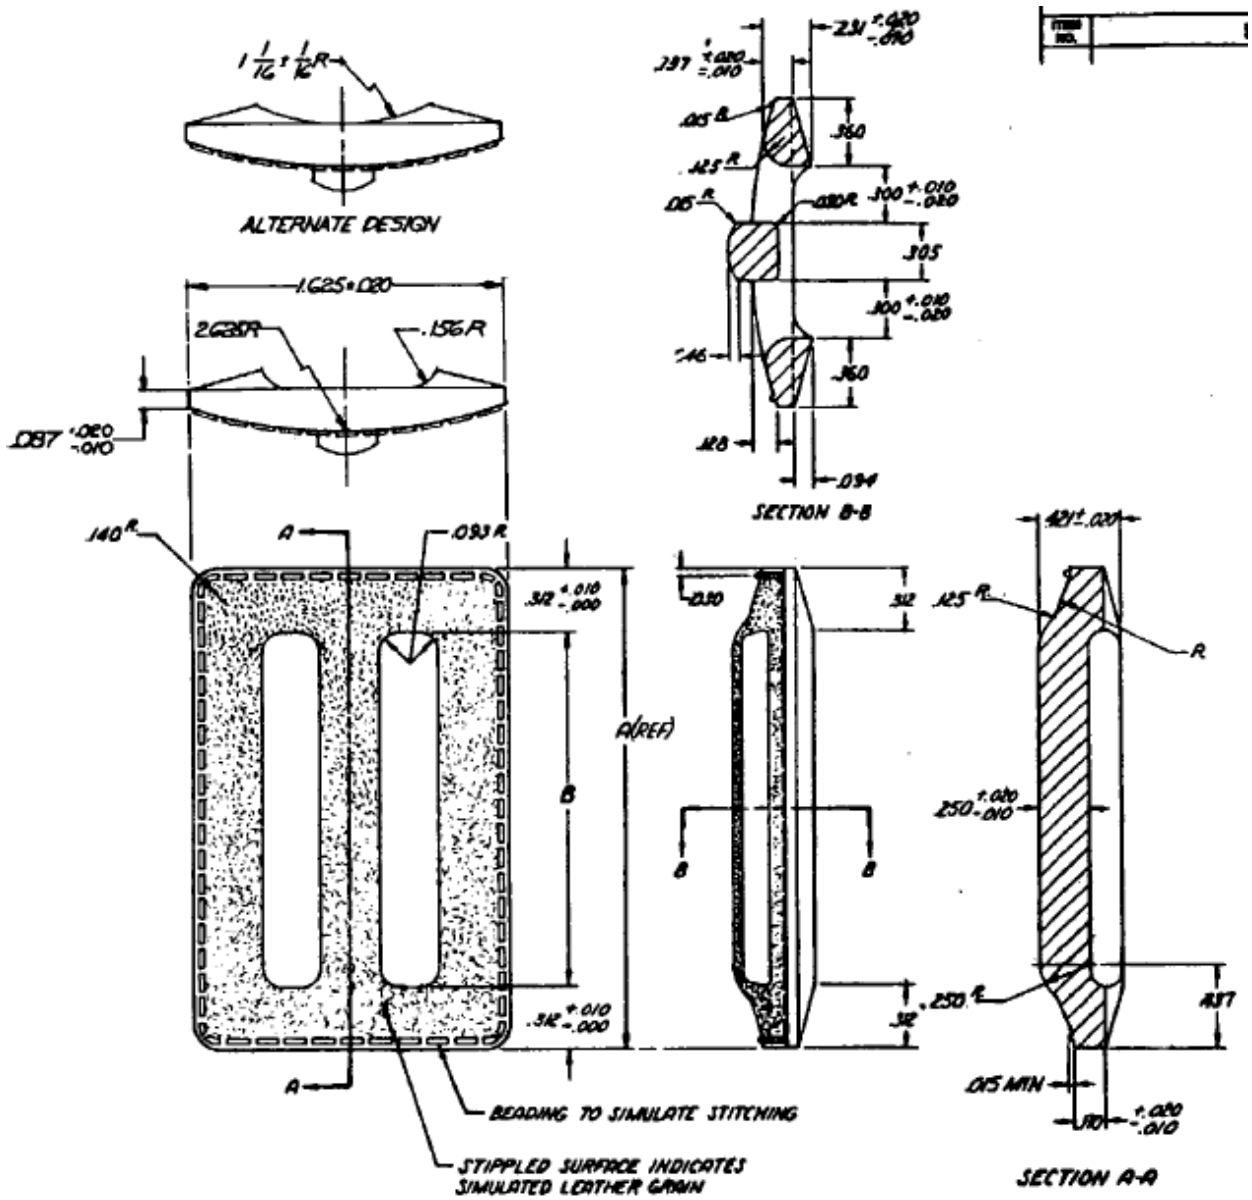


FIGURE 3. Belt buckle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FAS

Custodian:
Army - GL

Preparing Activity:
DLA - CT

(Project: 8405-2020-006)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.