INCH-POUND

A-A-55231
September 1, 1993

COMMERCIAL ITEM DESCRIPTION

CASE, HANDCUFFS, LEATHER, BLACK

The General Services Administration has authorized the use of this Commercial Item Description in preference to MIL-C-40121.

Abstract. The leather handcuff case herein described has a snap flap and affixes to a waist belt. It is intended for use by military law enforcement personnel, and designed for stowing military issue handcuffs.

Classification. The case, handcuffs, black shall be provided in one type and size.

Salient Characteristics. The handcuff case shall be of two piece leather pocket construction capable of belt attachment, and have an overlapping flap equipped with a snap closure. The main body of the pocket shall form the back portion and continue into the overlapping flap. The bottom of the case shall be curved. The sewn-on pocket portion shall be molded to the back portion, creating a cavity for handcuff insertion, excluding leather sidewalls, of a minimum of 5/8 inch.

The case, including flap, shall be shaped as indicated in Figure 1. Stitched double edges of body, flap edge and pocket piece, when sewed together shall be sealed with a colorless aqueous solution similar to gun tragacanth and smoothly burnished. When in a closed configuration, the outside dimensions of the case shall measure 3-3/4 ±1/8 inches in width across the top, and

The Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FSSD, 2800 South 20th Street, Philadelphia, PA 19101-8419, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A

FSC 8465

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

5-1/2 ± 1/8 inches in length, from top to bottom. The curvature of the pocket facing, bottom portion, shall be made to a fully curved 1-3/8 inch radius, concentrically sewn to the body, bottom portion. Stitching around body shall be 3/16 inches from edge. All stitching shall be lock-stitch, 4-6 stitches per inch. The main body, back portion, shall be perforated with two slots, centered, 1/8 inch wide, 2-3/8 inches long, and 1-1/2 inches apart.

Material

Leather: The leather shall conform to any type, class 1 of KK-L-271 and shall be dyed and finished smoothly on the grain side. The leather shall be black in color, insuring a long-lasting lustrous finish. The finished grain side shall be used for all visible facings.

Thread, polyester: Twisted multiple (3 minimum) cord soft finish thread at 1700 yards per pound (minimum) or bonded finish thread at 1500 yards per pound (minimum) with either offering a minimum of 24 pounds breaking strength may be used. The color of the thread shall be black and exhibit colorfastness to weathering in compliance with good commercial practice.

Ends of stitching shall be backstitched or over-stitched not less than 1 inch, except where ends are turned under, or caught in other seams and stitching.

Fastener, snap: Snap fasteners shall be steel with black finish consisting of a size 2 button with socket for the female half and a size 2 eyelet with stud for the male half. The button/socket assembly shall be the characteristic spring clamp type.

Label/Tag. Each item shall be individually bar-coded with the type VIII, class 17 label/tag of DDD-L-20. This label/tag shall be located so that it is completely visible on each item and causes no damage to the item.

Defects. Bar-code omitted or not readable by scanner, Human-Readable Interpretation (HRI) omitted or illegible. Bar-coded type not as specified, code density not as specified.

Sizes and Measurements. The finished case shall conform to the dimensions indicated in the above description, and Figure 1.

Workmanship. The case shall be clean and free from grease and dirt. Leather components shall be free from any cut, damaged grain, scratch, hole, brand, hip mark and loose spongy leather. Burnished edges shall be smooth and free from roughness. Thread tension shall be maintained so that there will be no loose stitching. All thread ends shall be tied and fused.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

Thread tension shall be uniformly secure, with thread ends tied and fused. Improperly seated, clinched or malfunctioning snap fasteners shall render case unacceptable.

The finished case shall be thoroughly cleaned with all loose thread, lint, and other debris removed.

Product Demonstration Model. When required, offerers shall submit samples of their intended production. The Product Demonstration Model will consist of units independently developed. Product Demonstration Models will be analyzed and evaluated by the government. Evaluation criteria and basis for award are contained in the solicitation. Product Demonstration Models will be retained by the government. One (1) Product Demonstration Model approved by DPSC under the resultant contract will serve as a manufacturing standard for the corresponding production items delivered under this contract. Offerers are advised that the Product Demonstration Model does not relieve the successful offerer of his responsibility to perform in accordance with the Commercial Item Description specified above.

Regulatory Requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

Quality Assurance

Certification. The contractor shall certify that the product offered meets the salient characteristics of this description and that the product conforms to the producer's own drawings, specifications, standards and quality assurance practices. The government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for, under the provisions of the contract.

Examination. The lots of handcuff cases shall be inspected in accordance with "Sampling Procedures and Tables for Inspection by Attributes", ANSI/ASQC Z1.4, published by the American Society for Quality Control.

Visual Examination. The inspection level for visual examination shall be II and the AQL 2.5 for visual defects. The sample unit is one handcuff case.

Dimensional Examination. The finished case shall conform to the dimensions specified. Any dimension that is not within the established tolerance shall be classified as a defect. The sample unit shall be one case; the inspection level shall be S-3 and the AQL shall be 2.5.

Source: https://assist.dla.mil -- Downloaded: 202640-26T09:45Z
Check the source to verify that this is the current version before use.

Packaging Examination. The fully packaged shipping containers shall be examined in accordance with defects listed below. The lot size shall be the number of shipping containers in the inspection lot. The inspection level shall be S-3 and AQL, expressed in terms of defects per hundred units, shall be 2.5.

EXAMINE	DEFECT
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, or method of application
Materials	Any component missing, damaged, or not as specified
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, improper taping, or inadequate stapling
Content	Number of items in container is more or less than required
	NSN shown on one or more items not as specified on shipping container
Palletization	Length, width, or height exceeds specified maximum requirements
	Pallet type not as specified
	Load not bonded as specified

Defects. The finished case shall be examined for the following defects:

Body: any hole, cut, tear, color not as specified; any spot or stain (outside); thread ends not removed; failure to clean, remove lint or other foreign matter, measurement of item not as specified. Any component, assembly, finish or workmanship feature not in compliance with applicable requirements of this Commercial Item description.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

Leather: evidence of loose flesh, slaughter cuts, abrasions or scratches, holes, hip marks, grub damage, brand marks, wrinkles, flanky, spongy, pipey or stretchy leather; not dyed and finished on grain side; not black in color; improper or incomplete burnishing of matched edges.

Thread/Stitching: not type specified, or less than 4 stitches per inch.; loose thread tension; failure to tie and fuse thread ends.

Hardware: Snap fasteners not as specified; improperly mated, clinched or seated; any other malfunction adversely affecting ease of operation.

Preservation, Packing, and Marking. The preservation, packing, and marking shall be as specified in the contract or order.

Source of Government Documents. Copies of Military and Federal documents are available from:

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

Sources of Nongovernment Documents.

ANSI/ASQC Z1.4 - Sampling Procedures and Tables For Inspection By Attributes

(Applications for copies should be addressed to American National Standards Institute, 1430 Broadway, New York, NY 10018-3308.)

Custodians:
Army - GL
Navy - NU


Civil Agency Coordinating Activity
GSA-FSS

Preparing Activity
DLA-CT

User Activity:
Navy - MC

Project No. 8465-0105

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

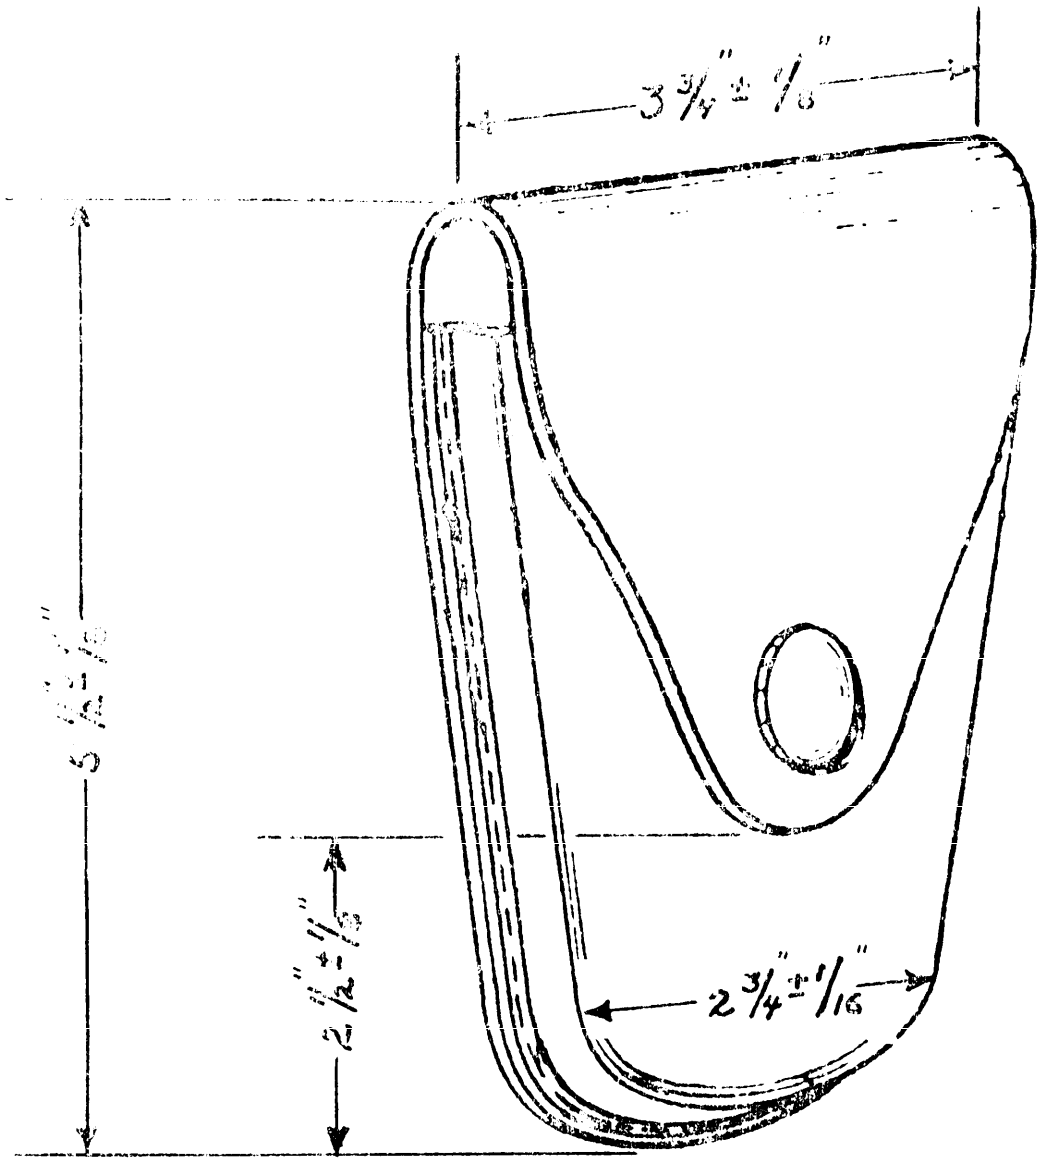

NOTE: Internal cavity dimension for insertion of handcuff shall be minimum of 5/8 inch.

FIGURE 1. CASE, HANDCUFFS, LEATHER, BLACK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	A-A-55231	1 SEPTEMBER 1993

3. DOCUMENT TITLE

CASE, HANDCUFFS, LEATHER, BLACK

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME *(Last, First, Middle Initial)*	b. ORGANIZATION	
c. ADDRESS *(Include Zip Code)*	d. TELEPHONE *(Include Area Code)* (1) Commercial (2) AUTOVON *(If applicable)*	7. DATE SUBMITTED *(YYMMDD)*

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE *(Include Area Code)*	
Defense Personnel Support Center ATTN: DPSC-FSSD (12-3-D)	(1) Commercial	(2) AUTOVON
c. ADDRESS *(Include Zip Code)* 2800 South 20th Street P. O. Box 8419 Philadelphia, Pennsylvania 19101-8419	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.