INCH-POUND

A-A-55240

November 1, 1993

COMMERCIAL ITEM DESCRIPTION

APRON, CONSTRUCTION WORKER'S

The General Services Administration has authorized the use of this commercial item description in preference to DDD-A-1466.

Abstract. This document covers two types of cotton duck aprons to be used by construction workers. Type I apron is a mechanic's apron for holding bolts, nuts, and tools during the erection of surveying towers. Type II apron is a carpenter's apron to be utilized in general construction work.

Classification. The finished aprons shall be in the following types and classes, as specified:

Type I - Waist type

Class 1 - Camouflage Green 483

Type II - Bib type

Class 1 - Camouflage Green 483
Class 2 - Unbleached

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FSSD, 2800 South 20th Street, Philadelphia, PA 19101-8419, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A

FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

Salient characteristics. The basic material for the aprons shall be cotton duck (No. 10 hard texture) conforming to CCC-C-419. The duck for the types I and II, class 1 aprons shall be dyed Camouflage Green 483, approximating color chip 34094 of FED-STD-595 in accordance with CCC-D-950. It shall be mildew- and water-repellent-treated in accordance with type I, class B, inhibitor (d) or (e) of CCC-D-950. The duck for type II, class 2 aprons shall be shade natural, and when specified (see ordering data) shall be mildew- and water-repellent-treated in accordance with class B, inhibitor (d) or (e) of CCC-D-950. The thread shall be polyester and shall conform to type I or II, class 1, subclass A, size F of V-T-285. For the types I and II, class I aprons, the thread shall be dyed Camouflage Green 483, approximating color chip 34094 of FED-STD-595, and for the type II, class 2 aprons, the thread shall be natural color. The dyed thread shall show "good" colorfastness to laundering. The tape for both types shall be cotton, 2 inches wide for the waist belt of the type I apron. For the type II aprons, the tape shall be 5/8 or 3/4 inch wide for the neck and tie tapes and 3/4 inch wide for the binding. For the types I and II, class 1 aprons, the tape shall be dyed Camouflage Green 483, approximating color chip 34094 of FED-STD-595, and shall conform to type I, class 4 of MIL-T-43566. For the type II, class 2 aprons the tape shall conform to type I, class 1a of MIL-T-43566.

Type I. The type I apron is a waist type with two reinforced box-style pockets and a belt of tape. The belt is equipped with four metal slide loops, which may be adjusted to form compartments to accommodate tools, and is fastened by a male and female connection (see Figure 1). The resin agent used for dipping or impregnating the end of right belt on type I aprons to prevent fraying shall be cellulose acetate or cellulose acetate butyrate. The belt is equipped with four metal slide loops, which may be adjusted to form compartments to accommodate tools and is fastened by a male and female connection (see Figure 1).

Type II. The type II apron is a bib type with a 5/8 or 3/4 inch- wide tape for neck strap and tie tapes, a bib pocket divided into three sections, a swinging waist pocket divided into two sections, and a web loop used for holding a hammer (see Figure 2).

Figures. Figures 1, 2, and 3 are furnished solely forguidance and information. Should variation from the written document appear in the figures, the written document shall govern.

Materials

Fasteners, belt. The fastener for the waist belt on the type I aprons shall consist of a 2-5/16 inch male and female connection constructed of a copper alloy (brass) casting, conforming to type I, style 2 of MIL-F-411. If steel is used, the clasp assembly

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

shall be given a phosphate-treated zinc plate and finished with black baked phenol or urea formaldehyde enamel conforming to ASTM B 633 (see Figure 3).

Loops, slide. The tape belt on the type I aprons shall be equipped with four slide loops conforming to class 1, 2 or 3, style 2, size 2 inches of MIL-L-3851. If steel is used, the slide shall be given a phosphate-treated zinc plate conforming to ASTM B 633 and finished with black baked phenol or urea formaldehyde enamel (see Figure 3).

Webbing. Each type II apron shall have a hammer holder made of nylon webbing conforming to type VIII, class 2, of MIL-W-4088. The color of the webbing shall be Camouflage Green 483, approximating color chip 34094 of FED-STD-595.

Finished measurements. Measurements for types I and II aprons shall be as shown in Table I.

Table I

Finished measurements	Dimension (inches)	Tolerance (inches)
Type I Apron		
Length of apron	9-1/2	+/-3/8
Width of apron	15-1/2	+/-3/8
Depth of pocket	7	+/-1/4
Width of pocket (from outside edge to outside edge)	7	+/-1/4
Waist belt - left extension (from edge of apron to fold at bar of fastener)	10-1/2	+/-1/2
- right extension (from edge of apron to end of tape, with all hardware removed)	38	+/-1/2
Type II Apron		
Length of apron	21	+/-1/2
Width of apron, at waist	18-1/2	+/-1/2
Width of apron, at bib top (inside of and parallel to top binding)	8-1/4	+/-1/2
Depth of bib pockets	7	+/-3/8
Width of bib side pockets (from outside edge to stitching at center bib pocket)	4	+/-1/8
Width of bib center pocket	1-7/8	+/-1/8
Hammer holder	4	+/-1/16
Depth of waist pockets	7	+/-1/4
Width of waist pockets (from outside of tape binding to center stitching)	9-1/4	+/-1/4
Neck strap (edge of apron to edge of apron)	22-1/2	+/-1/4
Tie strap (edge of apron to end of tie tapes)	18	+/-1/2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

Labels/marking. Each apron shall have an identification label conforming to type IV, class 5, of DDD-L-20. The colorfastness to laundering requirements of DDD-L-20 shall apply.

Label/tag. Each item shall be individually bar-coded with the type VIII, class 17 label/tag of DDD-L-20. This label/tag shall be located so that it is completely visible on the item when it is folded and/or packaged as specified and causes no damage to the item.

Patterns. The Government shall furnish a single size pattern. The contractor is responsible for grading patterns for additional sizes. The pattern generally provides for a seam allowance of 3/8 inch for joining seams. Commercial patterns may be used in lieu of the Government-furnished pattern provided they conform to the cited design and finished measurements.

Workmanship. After completion, the finished aprons shall be thoroughly cleaned, and all loose thread, lint, and foreign matter shall be removed.

Product demonstration model. When required, offerers shall submit samples of their intended production. The product demonstration model will consist of units independently developed. Product demonstration models will be analyzed and evaluated by the Government. Evaluation criteria and basis for award are contained in the solicitation. Product demonstration models will be retained by the Government. One (1) product demonstration model approved by DPSC under the resultant contract will serve as a manufacturing standard for the corresponding production items delivered under this contract. Offerers are advised that the product demonstration model does not relieve the successful offerer of his responsibility to perform in accordance with the commercial item description specified above.

Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

Quality assurance

Certification. The contractor shall certify that the product offered meets the salient characteristics of this description and that the product conforms to the producer's own drawings, specifications, standards and quality assurance practices. The Government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract. Reliance on contractor quality assurance systems shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

Examination

Visual examination. The lot size shall be expressed in units of aprons of one type and class only. The sample unit is one apron.

Defects

End item visual examination. The end items shall be examined for the defects list below:

Examine	Defect
General defects:	
Material defects and damages	Any weakening defect such as smash, multiple float, or loose slub Hole (except exposed drill hole), cut, tear, or needle chew Exposed drill hole Mends, darns, or patches Edges of waistband tape frayed Edges of tape scalloped Any operation not as specified
Cleanness	Spot or stain on outside Thread ends not trimmed or loose threads not removed
Component and assembly	Any component part or required operation omitted (unless otherwise classified herein) Any component not as specified
Labels	Missing, incorrect or illegible Not positioned as specified
Bar code	Bar code omitted or not readable by scanner Human-readable interpretation (HRI) omitted or illegible Not visible on folded, packaged item Causes damage to the item

Packaging examination. The fully packaged shipping containers shall be examined in accordance with the defects listed below. The lot size shall be the number of shipping containers in the inspection lot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, or method of application
Materials	Any component missing, damaged, or not as specified
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, improper taping, or inadequate stapling
Content	Number of items in container is more or less than required
	NSN shown on one or more items is not as specified on shipping container
Palletization	Length, width, or height exceeds specified maximum requirements
	Pallet type not as specified
	Load not bonded as specified

Packing. The preservation, packing, and marking shall be as specified in the contract or order.

Notes

Ordering data

a. Title, number, and date of this document.
b. Types and classes required (see Classification).
c. When mildew and water repellent treatment is required on type II, class 2 aprons (see Salient characteristics).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

Source of Government documents. Copies of military and Federal documents are available from:

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

Sources of non-Government documents. Copies of American Society for Testing and Materials documents are available from:

(Applications for copies should be addressed to American Society For Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

Custodians:

Army - GL
Navy - NU
Air Force - 99

Review Activities:

Navy - YD
Air Force - 82

User Activity:
Air Force - 45

Civil Agency Coordinating Activities:

GSA - FSS
JUS - FPI

Preparing Activity:

DLA - CT

Project No. 8415-0898

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

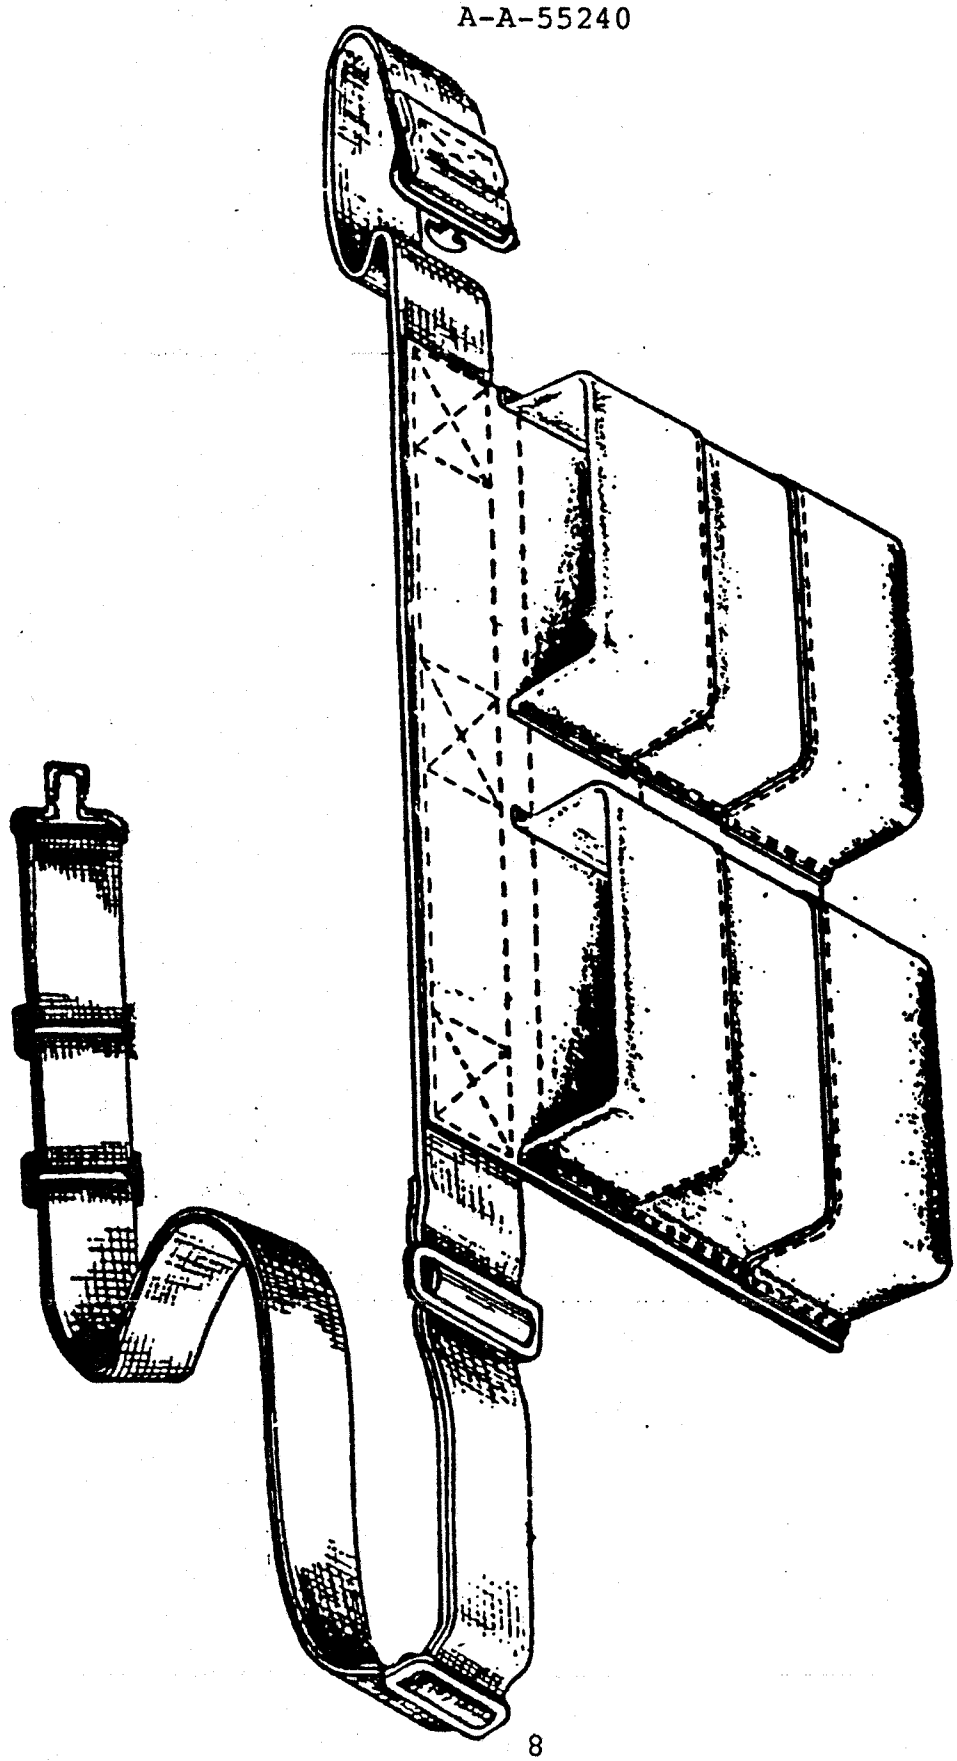


FIGURE 1. Apron, construction workers type I, waist type.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.



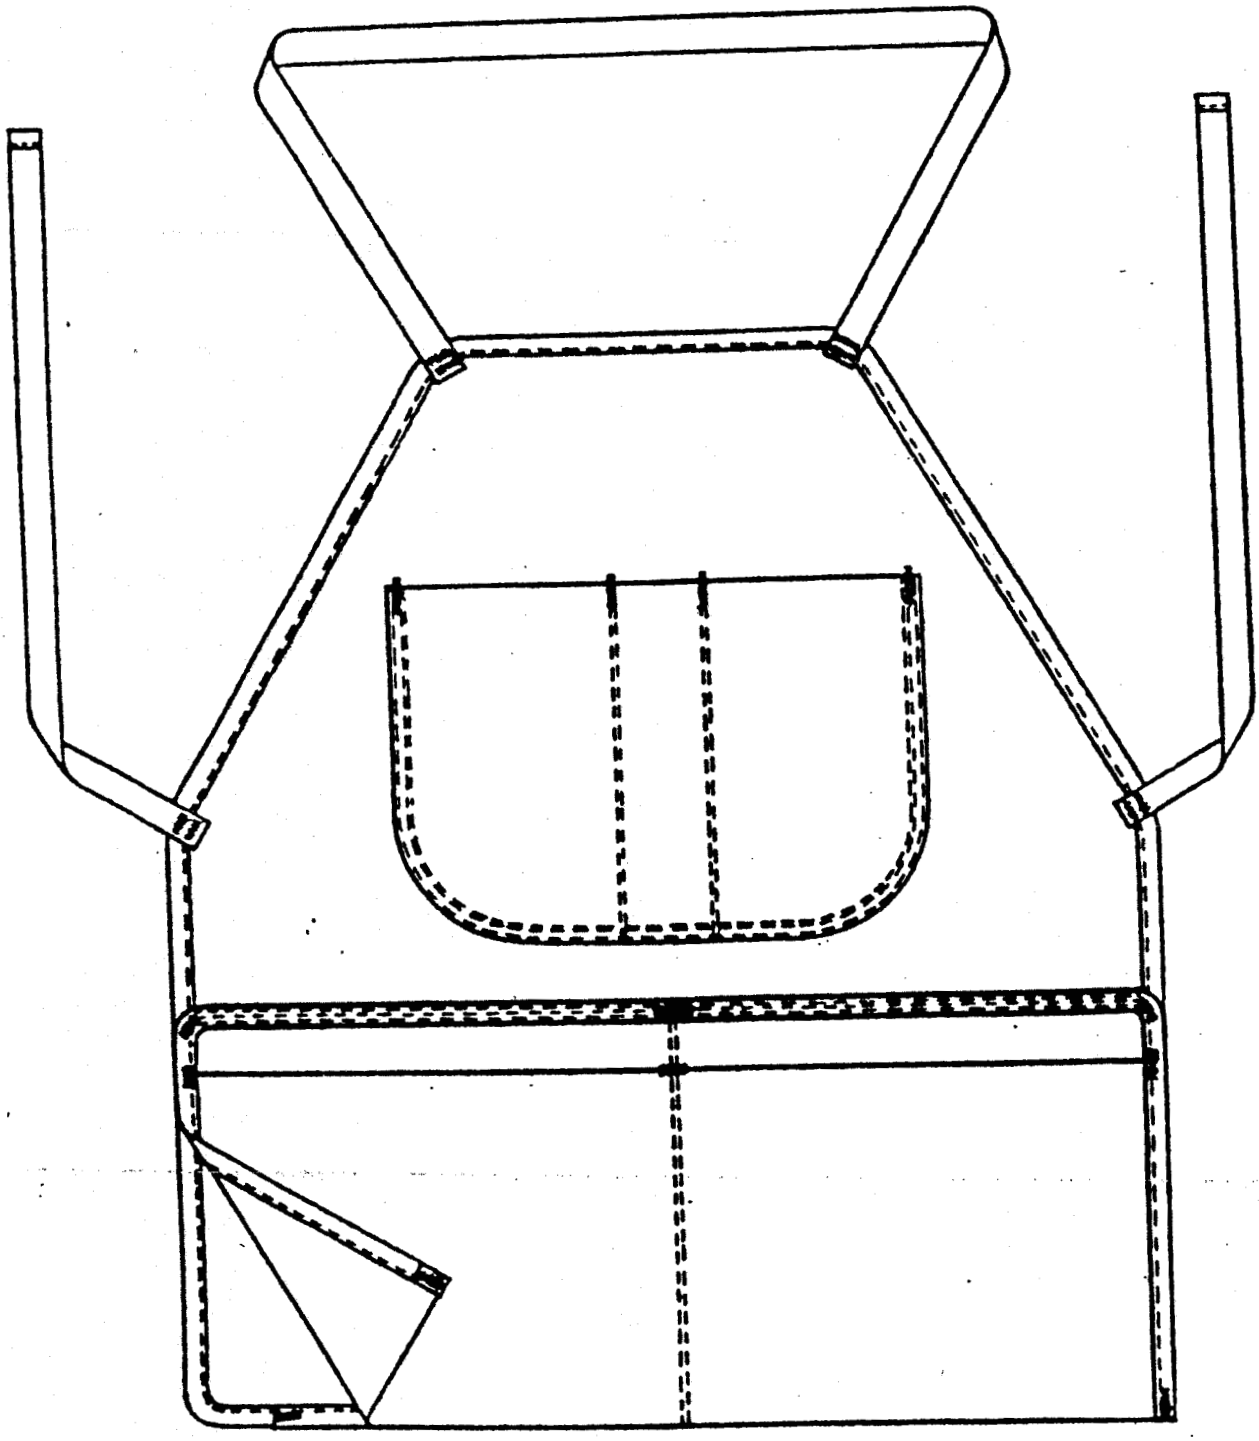


FIGURE 2. Apron, construction workers type II, bib type.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

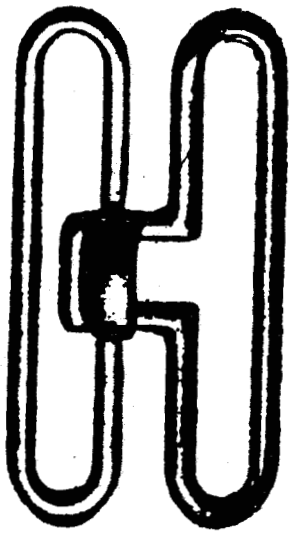

FASTENERS, BELT

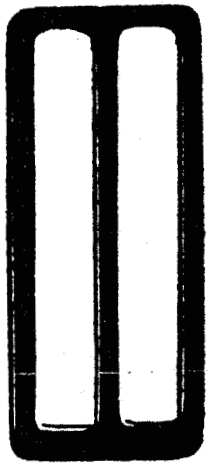

LOOPS, SLIDE

FIGURE 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	A-A-55240	931101

3. DOCUMENT TITLE
APRON, CONSTRUCTION WORKER'S

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME Defense Personnel Support Center ATTN: DPSC-FSSD (12-3-D)	b. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON
c. ADDRESS (Include Zip Code) 2800 South 20th Street P. O. Box 8419 Philadelphia, Pennsylvania 19101-8419	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

DD Form 1426, OCT 89

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.