INCH-POUND

A-A-55245
November 12, 1993

COMMERCIAL ITEM DESCRIPTION

NECKLACE, PERSONNEL, IDENTIFICATION TAG

The General Services Administration has authorized the use of this commercial item description in preference to MIL-N-3019.

Abstract. The necklace is intended to be worn by military personnel to support two personnel identification tags.

Salient characteristics. The necklace shall be comprised of a main loop and extension loop, made up of chain. The chain shall be composed of bead shaped and dumbbell shaped elements. The chain and splicing links shall be fabricated from corrosion resistant (stainless) steel. Each bead shaped element shall be Number 3 size, with 97 beads per foot and a tolerance of plus 3 beads, minus none. The overall length of the main loop chain including the splicing link shall be 27 inches, plus 1/4 inch, minus 0 inch. The overall length of the extension loop chain including the splicing link shall be 5-1/2 inches, plus 1/4 inch, minus 0 inch. One splicing link shall be used to join the ends of the main loop chain and one splicing link shall be used to join the ends of the extension loop chain. All parts of the necklace shall be freely rotatable and longitudinally movable relative to each other. The necklace shall be given a bright polished finish. The necklace does not include the identification tags shown in Figure 1.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FSSD, 2800 South 20th Street, Philadelphia, PA 19101-8419, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8465

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

Material

Steel, corrosion-resistant. The steel shall conform to types 304, 305 or 316, condition annealed, hot-rolled or cold-rolled of ASTM-A 240.

Label/marking. The contractor may place his identification on the splicing link provided there are no rough edges and the splicing link is not damaged or impaired.

Workmanship. After completion, the finished necklace shall be thoroughly cleaned, and be free from grease, oil, rough surfaces or irregularities which may scratch, cut or otherwise cause discomfort to the wearer and shall be free from other defects which will affect appearance or serviceability.

Product demonstration model. When required, offerers shall submit samples of their intended production. The product demonstration model will consist of units independently developed. Three (3) product demonstration models will be analyzed and evaluated by the Government. Evaluation criteria and basis for award are contained in the solicitation. Product demonstration models will be retained by the Government. One (1) product demonstration model approved by DPSC under the resultant contract will serve as a manufacturing standard for the corresponding production items delivered under this contract. Offerers are advised that the product demonstration model does not relieve the successful offerer of his responsibility to perform in accordance with the commercial item description specified above.

Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

Quality assurance

Certification. The contractor shall certify that the product offered meets the salient characteristics of this description and that the product conforms to the producer's own drawings, specifications, standards and quality assurance practices. The government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract. Reliance on contractor quality assurance systems shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the government for acceptance comply with all requirements of the contract.

Source: https://assist.dla.mil -- Downloaded: 20261O-26T09:45Z
Check the source to verify that this is the current version before use.

Examination

Visual examination. The necklace shall be examined for the defects listed below. The lot size shall be expressed in units of necklaces. The sample unit is one necklace.

Defects. The necklace shall be examined for the following defects: any part missing, chain kinks, splicing links malformed, oily or dirty, all parts not freely rotatable, finish not as specified, not made of specified material, metal cracks in beads or splicing links, beads per foot not within specified tolerance, measurement of items not as specified.

Dimensional examination. The finished necklace shall conform to the dimensions specified. Any dimension that is not within the established tolerance shall be classified as a defect. The sample unit shall be one necklace.

Packaging examination. The fully packaged shipping containers shall be examined in accordance with defects listed below. The lot size shall be the number of shipping containers in the inspection lot.

EXAMINE	DEFECT
Marking (exterior and interior)	Omitted, incorrect, illegible; of improper size, location, or method of application
Materials	Any component missing, damaged, or not as specified
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, improper taping, or inadequate stapling
Content	Number of items in container is more or less than required
	NSN shown on one or more items is not as specified on shipping container
Palletization	Length, width, or height exceeds specified maximum requirements
	Pallet type not as specified
	Load not bonded as specified

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

End item performance testing. The necklace shall conform to the breaking strength requirements when tested. The sample unit is one necklace. When tested the main loop and the extension loop shall have a breaking strength of not less than 15 pounds and not greater than 32 pounds. The section of the loop tested shall include the splicing link. Two breaking strength determinations shall be made on each sample unit (one on the main loop and one on the extension loop). The testing machine shall consist of a means of supporting the chain, a means for slowly and uniformly applying the load to the chain, and a means for determining the applied load. The chain material shall be inserted in the machine in such a manner that there are no kinks in the chain, that the supporting means and the load applying means do not damage or distort the beads, and that the chain section tested includes the splicing link. A load of 0 to 15 pounds shall be applied uniformly over a period of 1 minute. The load shall then be uniformly increased to determine the maximum breaking strength. If the chain breaks within three beads of the clamping device the test shall be disregarded and repeated. The results shall be reported for each loop to the nearest 0.1 pound. Any result not falling within the limits specified shall be considered a test failure.

Preservation, packing, and marking. The preservation, packing, and marking shall be as specified in the contract or order.

Source of Government documents. Copies of military and Federal documents are available from:

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

Sources of non-Government documents

ASTM-A 240 - Standard Specification for Heat-Resisting Chromium and Chromium-Nickel Stainless Steel Plate, Sheet, and Strip for Pressure Vessels

(Applications for copies should be addressed to American Society For Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

Custodian:
Army-GL
Navy-NU
Air Force-99

Civil Agency Coordinating Activity:
GSA - FSS


Review Activity:
Army-MD
Navy-PE
Air Force-82, 45
Coast Guard-CG

Preparing Activity:
DLA - CT

User Activity:
Navy-MC

Project No. 8465-0123

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

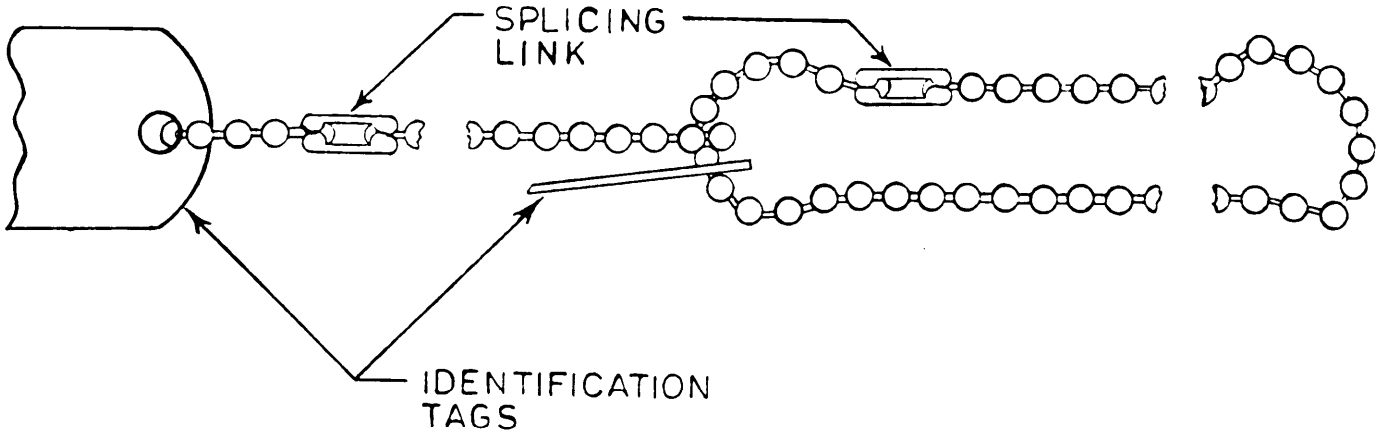

NECKLACE, PERSONNEL, IDENTIFICATION TAG

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	A-A-55245	12 NOVEMBER 1993

3. DOCUMENT TITLE

NECKLACE, PERSONNEL, IDENTIFICATION TAG

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME *(Last, First, Middle Initial)*	b. ORGANIZATION	
c. ADDRESS *(Include Zip Code)*	d. TELEPHONE *(Include Area Code)* (1) Commercial (2) AUTOVON *(If applicable)*	7. DATE SUBMITTED *(YYMMDD)*

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE *(Include Area Code)*	
Defense Personnel Support Center ATTN: DPSC-FSSD (12-3-D)	(1) Commercial	(2) AUTOVON
c. ADDRESS *(Include Zip Code)* 2800 South 20th Street P. O. Box 8419 Philadelphia, Pennsylvania 19101-8419	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:45Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.