INCH-POUND

A-A-55248
February 17, 1994

COMMERCIAL ITEM DESCRIPTION

MITTEN, WELDERS

The General Services Administration has authorized the use of this commercial item description in preference to MIL-M-16149.

Abstract. This commercial item description covers one type of welders' mitten with a one-finger leather gauntlet. The mittens are intended for use by Department of Defense personnel.

Classification. The mitten shall be procured in one size only, for either the left or right hand as specified (see Notes).

Salient characteristics

Description. The mitten shall be of a one-finger slip-on style, consisting of a two-piece leather front (gauntlet and palm), a one-piece leather back, two-piece thumb, welted leather inseams, fabric cuff lining, and a knitted insulated lining on the inside back of mitten extending from the wrist to the tip of the fingers. The mitten shall also have a leather fourchette between the index finger and the three-finger section. The thumb shall have a leather reinforcement piece attached over the face of the thumb (see Figure 1). Leather welts shall be placed in between the following seams: fourchette/one-piece back seam, back thumb/face thumb seam, gauntlet/palm seams, and the front/back seam. The minimum and maximum number of stitches per inch shall be 8-10. The mitten shall be neatly laid-off on a heated form.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FSSD, 2800 South 20th Street, Philadelphia, PA 19101-8419, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

Materials

Leather. The leather shall be flesh split cattlehide, conforming to Type IV, class 2 or Type VIII of KK-L-2004, suitable for use in gloves. Elongation requirements shall not apply. Both sides of the leather shall be smooth and free of loose flesh. Middle splits, head splits, belly splits and shoulder splits shall not be used. The color shall be the color resulting from chrome tanning. The leather thickness testing shall be as specified in the contract or order. The thickness of the leather shall be not less than 3.5 ounces nor more than 5 ounces, except for the fourchette and welt strips of the mitten where a minimum of 3 ounces is permitted.

Thread. The thread for seaming and stitching the mitten shall be cotton, 105 Tex (in accordance with ASTM D204), 4 ply yarn (visual certification) with a minimum breaking strength of 5.0 pounds (in accordance with ASTM D2256), conforming to A-A-52094.

Gauntlet lining. The gauntlet lining shall consist of an unbleached cotton duck fabric, or a gauntlet lining fabric composed of two thicknesses of unbleached cotton fabric securely laminated together. The weight of the hard textured unbleached cotton duck fabric shall be between 17.6 ounces per square yard (minimum) 19.4 ounces per square (maximum) (in accordance with ASTM D3776 option C 1/), utilizing plied warp and filling yarns (visual certification). The laminated fabric shall be composed of a cotton twill fabric weighing not less than 3.7 ounces per square yard and a plain weave cotton backing fabric weighing not less than 1.7 ounces per square yard (in accordance with D3776 option C). The finished fabric (laminated) shall contain not less than 14 ounces per square yard of natural rubber, synthetic rubber, or synthetic resin (in accordance with ASTM D3776 option C 1/), and weigh not less than 19.4 ounces per square yard (in accordance with ASTM D3776 option C 1/).

1/ All test results on the weight of the basic untreated cloth and finished cloth shall be averaged separately to determine the respective lot average weights. These values shall then be utilized in calculating the percent increase in the finished cloth weight. Results shall be calculated to the nearest 0.1 percent.

Hand liner. The inside back of the mitten shall have a knitted fleece fabric liner. The knitted fabric shall have an unbleached cotton ground with a napped wool pile face, shall be light gray in color, and shall weigh not less than 6.0 ounces per square yard (in accordance with ASTM D3776 option C).

Label/marking. Each mitten shall be marked with a combination identification and size label conforming to type III or IV, class 4, of DDD-L-20, except that the size is not applicable. Each mitten shall be marked on the gauntlet lining (backside) with the printing centered and positioned 1-1/4 (± 1/8) inches from the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

last line to the top edge of gauntlet opening. The color of the marking medium shall be dark blue or black and the markings shall show fastness to accelerated laundering only. The size of the lettering shall be 1/8 ± 1/16 inch in height, and the lettering shall bear the following inscription:

MITTEN, WELDERS
CONTRACT NO: SP0-000-000-0000 (Example)
NSN: 8415-00-000-0000 (Example)
NAME OF CONTRACTOR:
NAME OF MANUFACTURER: (If other than contractor)

Figure. Figure 1 is furnished for information purposes only. In the case of any inconsistencies between the written document and the figure, the written document shall govern.

Sizes and measurements. The finished mitten shall conform to the measurements below. All measurements are expressed in inches and have a tolerance of ± 1/4 inch.

Table I. Finished measurements

Measurement	Dimension
Width of palm (A)	5-1/2
Width of gauntlet cuff opening (B)	7-1/2
Length of thumb (C)	3-3/8
Length of first finger (D)	5-1/2
Length of palm (E)	8-1/2
Overall length (F)	15-1/4

Note: Refer to Figure 1 for A, B, C, D, E, and F measurements.

A. Measurement taken across palm, approximately 1 inch above thumb crotch, folded edge to folded edge.

B. Measurement taken across gauntlet cuff opening, folded edge to folded edge.

C. Measurement taken from thumb crotch to seam tip of thumb.

D. Measurement taken from tip of the first (index) finger to thumb crotch.

E. Measurement taken from tip of mitten to gauntlet palm seam.

F. Measurement taken from tip of mitten to top edge of gauntlet cuff.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

Workmanship. The finished mittens shall conform to the quality of product established by this document. The occurrence of defects shall not exceed the contractor's own quality assurance standards and the quality assurance standards defined by the technical data in the bid package.

Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

Quality assurance

Certification. The contractor shall certify that the product offered meets the salient characteristics of this description and that the product conforms to the producer's own drawings, specifications, standards and quality assurance practices. The Government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract. Reliance on contractor quality assurance systems shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract.

Certificate of compliance. Unless otherwise specified, a certificate of compliance shall be submitted and will be acceptable for the stated requirements. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

Visual examination. Each mitten shall be examined for the defects listed below.

Defects. Any hole, cut, tear, spot or stain (outside); thread ends not removed; any open seam; label/marking omitted, incorrect, illegible, incomplete, or misplaced; measurements of mitten not as specified; gauntlet lining not type specified; hand liner not type specified; any thumb, first (index) finger or remaining finger areas distorted or twisted, affecting comfort of wearer; any welt omitted; any welt protruding more than 1/8 inch from finished seam; 3 or more needle holes or pinholes; needle chews; stitches per inch not as specified; any mitten not neatly laid-off, any operation omitted or not performed as specified; misplaced; leather: any brittle or bony area, thin or weak spot, open vein, wrinkles, grub or tick marks, loose spongy or flanky area; any mend in fabric; improper lamination of lining. bar code omitted or not readable by scanner; human-readable interpretation (HRI) omitted or illegible; bar code not visible on folded, packaged item; bar code causes damage to the item; any items not packaged in accordance with contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

Preservation, packing, and marking. The preservation, packing, and marking shall be as specified in the contract or order.

Source of Government documents. Copies of military and Federal documents are available from:

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

Source of non-Government documents

ASTM TEST METHODS

(Applications for copies should be addressed to American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187)

Notes

Ordering data

a. Title, number, and date of this document
b. Whether mitten is required for left hand or right hand (see Classification.)

Custodian:
Navy-NU

Civil Agency Coordinating Activity:
GSA - FSS

Preparing Activity:
DLA - CT

Project No. 8415-0920

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

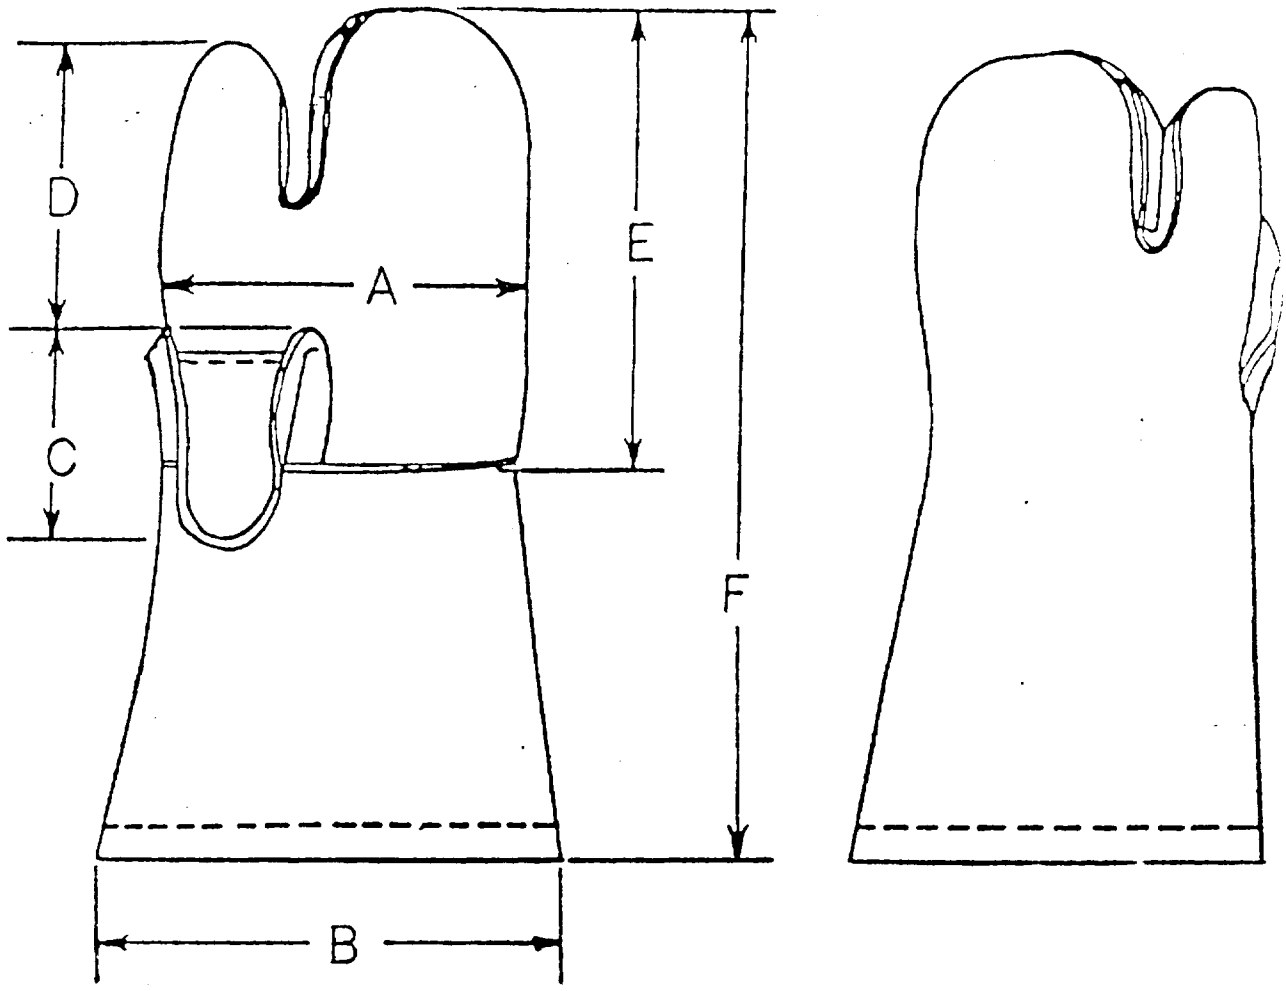


FIGURE I - MITTEN, WELDERS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	A-A-55248	940217

3. DOCUMENT TITLE
MITTEN, WELDERS

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
Defense Personnel Support Center ATTN: DPSC-FSSD (12-3-D)	(1) Commercial (215) 737-8105	(2) AUTOVON 444-8105
c. ADDRESS (Include Zip Code) 2800 South 20th Street P. O. Box 8419 Philadelphia, Pennsylvania 19101-8419	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

198

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.