INCH-POUND

A-A-55267
February 23, 1995

COMMERCIAL ITEM DESCRIPTION

STRAP, INVOLUNTARY, RESTRAINT: HANDCUFFS

The General Services Administration has authorized the use of this commercial item description, for all Federal agencies.

1. SCOPE

1.1 Scope. This commercial item description covers one type of flexible nylon restraint designed to be secured around the wrists and/or ankles of an apprehended person to restrict physical movement. The patented law enforcement restraint has two loops on a single strap, with two separate locks that can also be "double locked" (see Figure 2) to restrict pushing or pulling through the lock. The restraint must be cut off to be removed and is disposable. Each lock has two large teeth on a single trigger that engages into a ratchet fitted into the outside face of the strap itself.

2. Salient characteristics. The color shall be natural. The material for the strap shall be polyamide nylon (recyclable) with no metal inserts. The overall length of the loop restraint strap shall be 33 5/8 inches. The width of the loop restraint strap shall be 5/16 ± 1/32 inch. The thickness of the loop strap shall be 1/8 ± 20/1000 inch. The strap is not to exceed 5/16 ± 30/1000 inch in width.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FQSE, 2800 South 20th Street, Philadelphia, PA 19145-5099.

AMSC N/A FSC 8465

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

At these dimensions the strap can properly torque and twist just enough to allow proper movement without ripping or cutting the skin, which would create a potential blood hazard. The lock shall be 3/4 inch square. Each lock must have a single trigger with two large teeth approximately 3/16 inch wide x 1/4 inch long x 1/8 inch ledge, which fits tightly to the compatible ratchet design of the strap. Each tooth has a .160 base and is .156 long with a .178 face and a 30° angle (with a tolerance of ± .005). The identification tab is molded into the strap next to the locks. Its material is the same as that of the straps.

Note: Straps thinner than 1/8 inch are easily cuttable with scissors or knives. Teeth or ridges acting as teeth that are smaller than those specified are easily tripped. The teeth are angled at 22° to ensure a solid design.

2.2 End item performance testing

Material tensile strength:	8,000 psi minimum
Material heat deflection temp.:	@ 66 psi - 202° F (degrees)
Material flex strength:	13,500 psi minimum
Melting point:	255/265° F (degrees)
Elongation:	100%
IZOD impact:	Notched 1/8" 17
Flex:	Module 2.3 minimum
Specific gravity:	1.05 - 1.10 (POS. 125)

2.3 Labels. A commercial-type label is acceptable, provided that an additional printed cloth label containing the contractor's name, contract number, size and National Stock Number (NSN) is caught on the stitching of the commercial label. The commercial label shall include fiber and laundering information.

3. REGULATORY REQUIREMENTS

3.1 Regulatory requirements. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this commercial item description; conforms to the producer's own drawings, specifications, standards, and quality assurance practices; and is the same product offered for sale in the commercial marketplace. The Government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

4.2 Market acceptability criteria. The item offered must have been sold to the commercial market or to the Government, and the contractor shall certify and provide supporting documentation as to its serviceability and the long term (five years) availability of all necessary maintenance and logistics support parts and materials.

4.3 Warranty. The item offered shall include the standard warranty given to the commercial market beginning with the date of delivery of the individual items.

4.4 Visual examination. The strap shall be examined for the defects listed below:

4.4.1 Defects. Color not as specified; parts contaminated with oil, grease, or particulates burning; slay on lock latches; cracks or breaks when straps are bent back and forth; teeth in straps not free of any molding defects; short, flash; excessive sink in the locking/latch area; any material defects, distorted parts or poor workmanship; any component part omitted; label missing, incorrect, or illegible; measurement of item not as specified; bar code omitted or not readable by scanner; human-readable interpretation (HRI) omitted or illegible; bar code not visible on folded, packaged item; bar code causes damage to the item.

5. PACKAGING

5.1 Preservation, packing, and marking. The preservation, packing, and marking shall be as specified in the contract or order.

6. NOTES

6.1 Source of Government documents. Copies of military and Federal documents are available from:

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

longitudinal center line of the bag. The bag shall be marked [illegible]

6.2 Source of non-Government documents

ASTM Test Methods

(Applications for copies should be addressed to American Society For Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

AATCC Test Method

(Applications for copies should be addressed to American Association of Textile Chemists and Colorists (AATCC), P.O. Box 12215, Triangle Park, NC 27709-2215.)

6.3 Acceptance criteria. Acceptance criteria shall be as specified in the contract or purchase order.

6.4 Figures. Figures 1 and 2 are furnished solely for guidance and information. Should the figures vary from the written document, the written document shall govern.

6.5 Sources of supply. Competition is not limited to the manufacturer listed below:

6.6 Strap manufacturers. A company manufacturing commercial straps that has the capability to meet this commercial item description's requirements is:

Bingold Wrist-Straint, Inc.
P.O. Box 1040
Cicero, N.Y. 13039-1040
(315) 699-1136
FAX (315) 699-1137
1-800-788-4076

MILITARY INTERESTS:

Custodian
Army - GL

CIVIL AGENCY COORDINATING ACTIVITY:
GSA - FSS

PREPARING ACTIVITY:
DLA - CT

Project No. 8465-0166

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

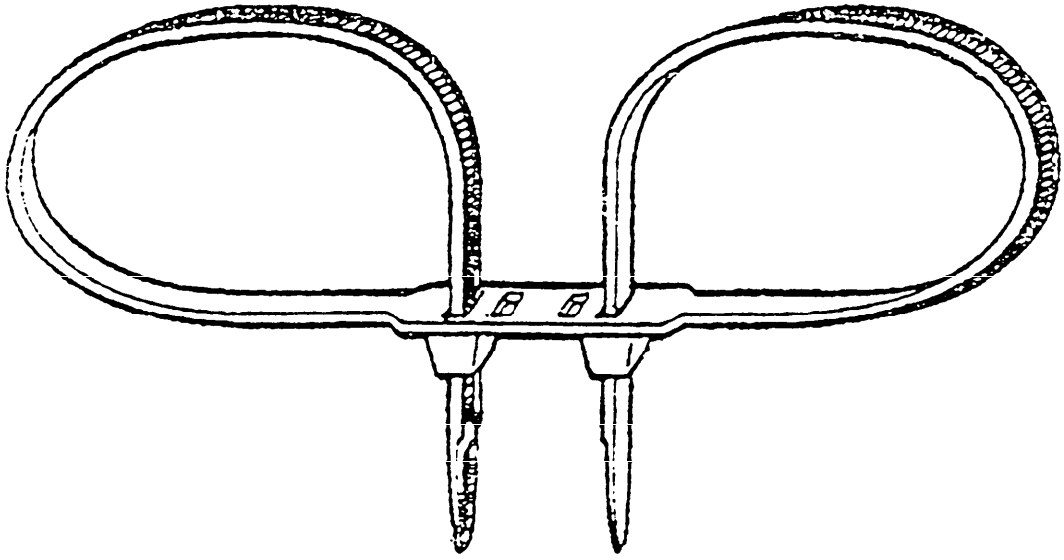


Figure 1.
Strap, Involuntary, Restraint: Handcuffs

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T09:45Z
Check the source to verify that this is the currentversion before use.

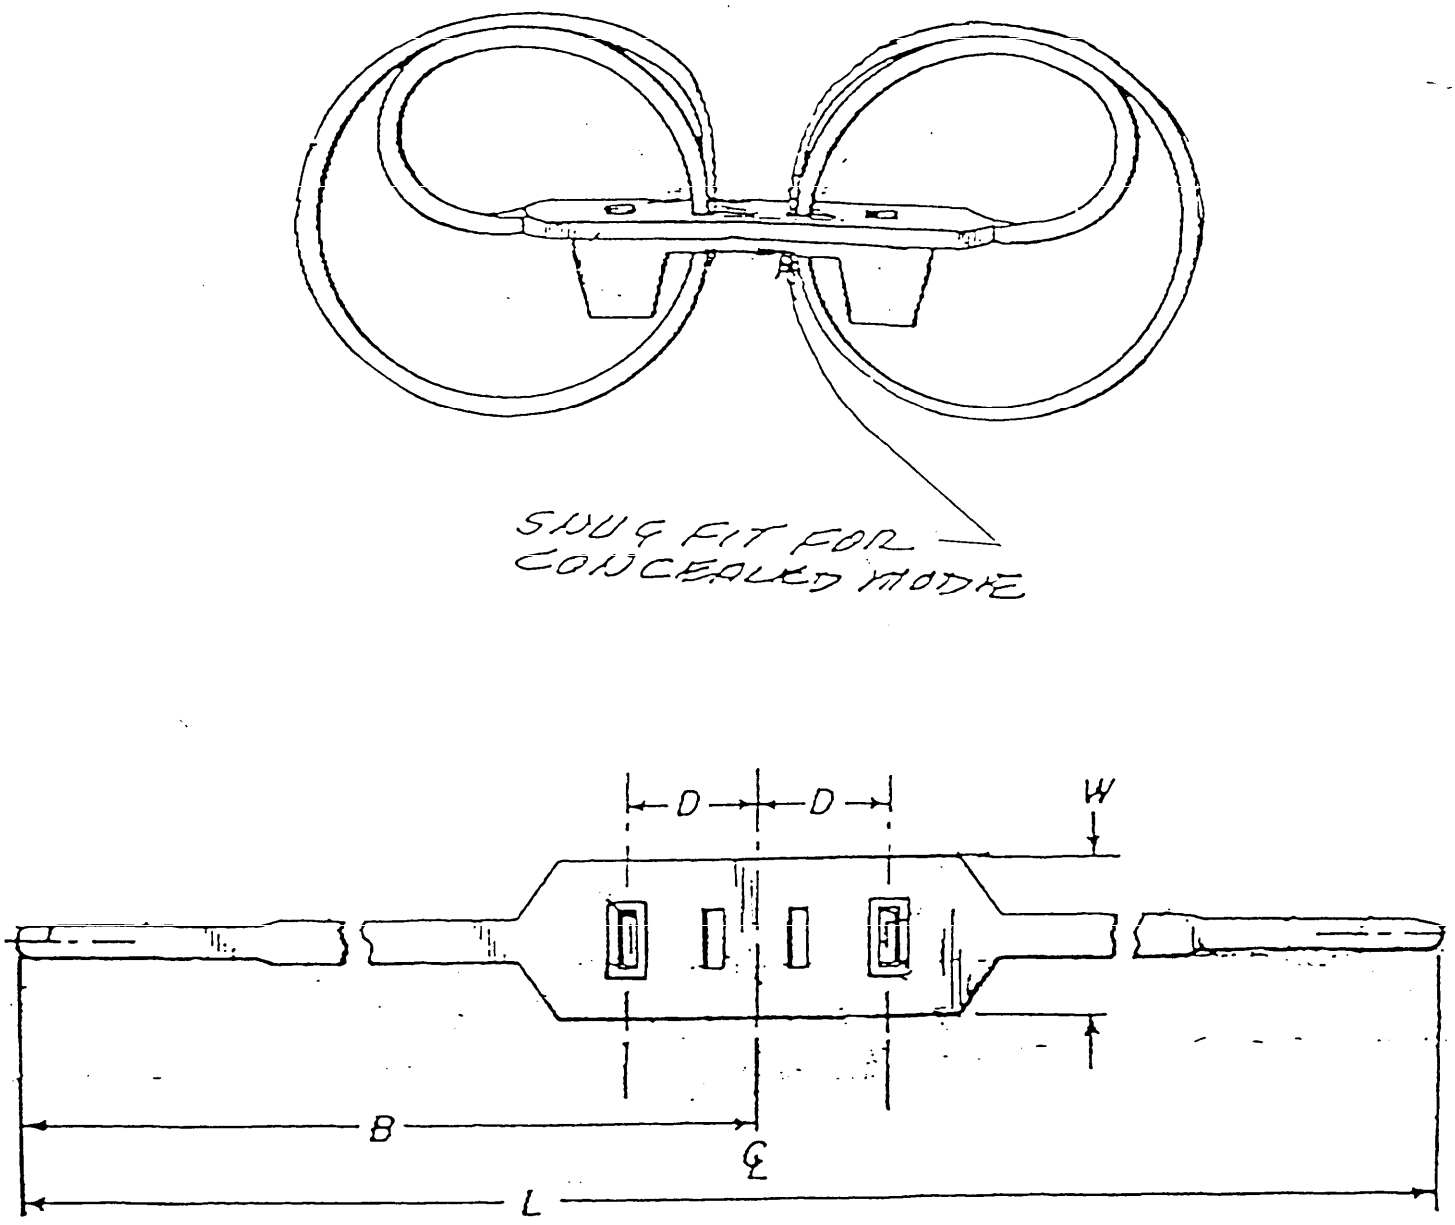


Figure 2.
Strap, Involuntary, Restraint: Handcuffs

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.