INCH-POUND


MIL-G-83528/12B
10 July 1992
SUPERSEDING
MIL-G-83528/12A
9 September 1988

MILITARY SPECIFICATION SHEET

GASKETING MATERIAL, CONDUCTIVE, SHIELDING GASKET, ELECTRONIC, ELASTOMER, ELECTRICAL, EMI/RFI, FLAT CIRCULAR WASHERS

This specification is approved for use by all Departments and Agencies of the Department of Defense

(B) The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-G-83528

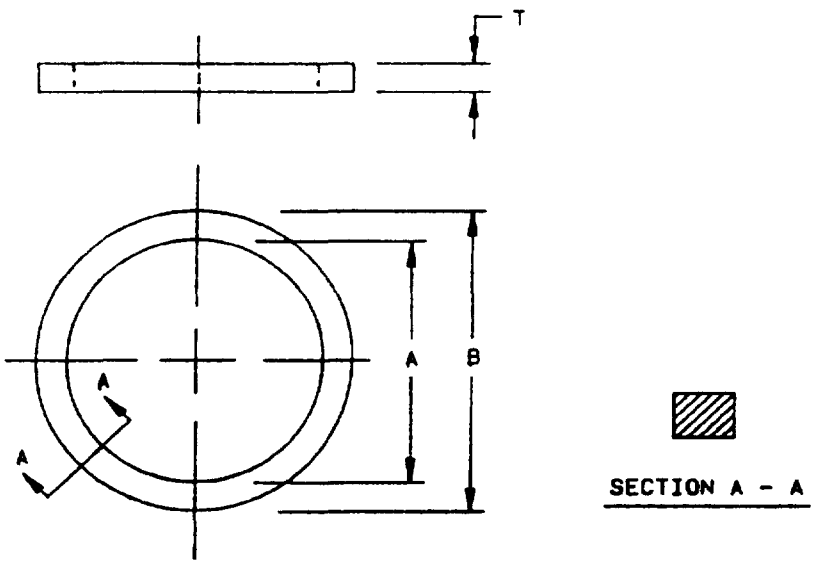

(B) FIGURE 1. EMI/RFI gaskets, elastomer, flat circular washers

(B) denotes changes

D'STRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:41Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Design and construction: See figure 1 and table I

(B) Material A, B, C, D, E, F, H, J, K, L, or M

(B) Part or Identifying Number (PIN) See table I.

Supersession information See table II

(B) TABLE I Dimensions

PIN M83528/012X 1/	Nominal dimensions 2/ 3/			Cross section area (cm^2) 4/
	A	B	T	
001	0.250	0 625	0.031 (0.79)	0 038
002	(6 35)	(15 86)	0 062 (1 57)	0 075
003	0 375	0 750	0 031 (0 79)	0 038
004	(9 53)	(19 05)	0.062 (1.57)	0 075
005	0 500	0 656	0 031 (0 79)	0 016
006	(12.70)	(16.66)	0 062 (1 57)	0.031
007	0 500	0.875	0 031 (0 79)	0.037
008	(12.70)	(22.23)	0.062 (1.57)	0.075
009	0 750	1.000	0.031 (0.79)	0.025
010	(19.50)	(25 40)	0 062 (1 57)	0.050
011	1 000	1.438	0 031 (0 79)	0.044
012	(25.40)	(36.53)	0.062 (1 57)	0.088

1/ "X" in the PIN shall be replaced by the applicable material type. Complete PIN example: M83528/012A001

2/ Dimensions are in inches; metric equivalents are in parentheses and are given for general information only.

3/ Tolerance shall be as follows:

Dimensions	Tolerance
Under .101 (2.57)	±.005 (0.13)
.101 to .200 (2.57 to 5.08)	±.010 (0.25)
.201 to .500 (5.10 to 12.70)	± 015 (0 38)
Over .500 (12 70)	± 020 (0 51)

4/ For calculation of volume resistivity (for reference only)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:41Z
Check the source to verify that this is the current version before use.

(B) TABLE II Supersession information

PIN 1/ M83528/012X	Superseded DESC drawing 1/ PIN 85111X
001	001
002	002
003	003
004	004
005	005
006	006
007	007
008	008
009	009
010	010
011	011
012	012

1/ "X" in the PIN indicates the applicable material type

CONCLUDING MATERIAL

Custodians
Air Force - 85
Navy - EC
Army - ER

Review activities
Air Force - 19, 99
NSA - NS

Preparing activity
Air Force - 85

Agent
DLA - ES

(Project 5999-0286-12)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:41Z
Check the source to verify that this is the current version before use.