INCH-POUND


MIL-G-83528/1B
30 June 1989
SUPERSEDING
MIL-G-83528/1A
9 September 1988

MILITARY SPECIFICATION SHEET

Ⓑ GASKETING MATERIAL, CONDUCTIVE, SHIELDING GASKET, ELECTRONIC, ELASTOMER, EMI/RFI, CIRCULAR STRIP .040 THROUGH .250 DIAMETER

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-G-83528.

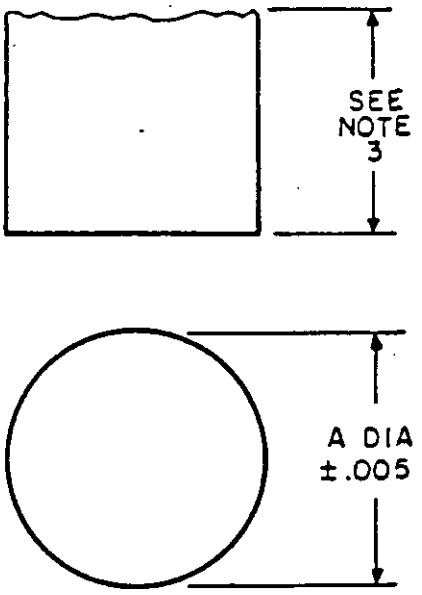

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Length to be determined according to purchase order.
4. Tolerance on flash shall be ±.008 on the extension and ±.005 on the thickness.

FIGURE 1. EMI/RFI circular-strip gasket.

Ⓑ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:39Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction: See figure 1 and table I.

(B) Material: Type A, B, C, D, E, F, H, J, K, or L.

(B) Part or Identifying Number (PIN): See table I.

Supersession information: See table II.

TABLE I. Dimensions.

(B)

PIN M83528/001X 1/ 2/	Dimension A ±.005 3/ 4/	Cross section 5/ area cm^2
001	.040 (1.02)	.008
002	.053 (1.35)	.014
003	.062 (1.57)	.020
004	.070 (1.78)	.025
005	.080 (2.03)	.032
006	.093 (2.36)	.043
007	.103 (2.62)	.053
008	.119 (3.02)	.072
009	.125 (3.18)	.079
010	.139 (3.53)	.099
011	.188 (4.78)	.179
012	.216 (5.49)	.236
013	.250 (6.35)	.316

(B) 1/ "X" in the PIN shall be replaced by the applicable material type.

(B) 2/ Complete PIN will include an additional letter to indicate material type. Example: M83528/001A001.

3/ Tolerance shall be ±.008 for parts over .200 in diameter.

4/ Dimensions are in inches; metric equivalents are in parentheses.

(B) 5/ For calculation of volume resistivity (see 4.6.11 of MIL-G-83528). For reference only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:39Z
Check the source to verify that this is the current version before use.

TABLE II. Supersession information.

PIN M83528/001X 1/	Superseded DESC drawing PIN 85103X 1/
001	001
002	002
003	003
004	004
005	N/A
006	005
007	006
008	007
009	008
010	009
011	N/A
012	010
013	N/A

1/ "X" in the PIN indicates the applicable material type.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Air Force - 11, 19, 20, 99
NSA - NS

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5999-0260-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:39Z
Check the source to verify that this is the current version before use.