

MILITARY SPECIFICATION SHEET


Ⓐ GASKETING MATERIAL, CONDUCTIVE, SHIELDING GASKET, ELECTRICAL, EMI/RFI O-RING STANDARD

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the gasket described herein shall consist of this specification and the latest issue of MIL-G-83528.



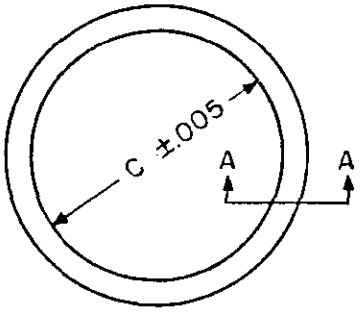

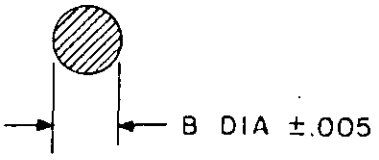

SECTION A-A

NOTES
1. *Dimensions are in inches.*
2. Metric equivalents are given for general information only.
3. Flash tolerance shall be ±.008 on extension and ±.005 on thickness.

FIGURE 1. EMI/RFI O-ring gaskets.

Ⓐ *denotes changes*

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:39Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction: See figure 1 and table I.

Material: Type A, B, C, D, E, F, H, J, or K.

Part number: See table I.

(A) Supersession information: See table II.

(A) TABLE I. Dimensions.

Part 1/ 2/ number M83528/002X	Dimension B 3/ 4/	Dimension C 4/ 5/	Cross section area cm^2 6/
007	.070 (1.78)	.145 (3.68)	.0038
011	.070 (1.78)	.301 (7.65)	.0038
012	.070 (1.78)	.364 (9.25)	.0038
013	.070 (1.78)	.426 (10.82)	.0038
014	.070 (1.78)	.489 (12.42)	.0038
015	.070 (1.78)	.551 (13.99)	.0038
017	.070 (1.78)	.676 (17.17)	.0038
018	.070 (1.78)	.739 (18.77)	.0038
019	.070 (1.78)	.801 (20.34)	.0038
020	.070 (1.78)	.864 (21.94)	.0038
021	.070 (1.78)	.926 (23.52)	.0038
022	.070 (1.78)	.989 (25.12)	.0038
024	.070 (1.78)	1.114 (28.30)	.0038
026	.070 (1.78)	1.239 (31.47)	.0038
028	.070 (1.78)	1.364 (34.65)	.0038
114	.103 (2.62)	.612 (15.54)	.0083
115	.103 (2.62)	.676 (17.17)	.0083
117	.103 (2.62)	.799 (20.29)	.0083
126	.103 (2.62)	1.362 (34.59)	.0083

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:39Z
Check the source to verify that this is the current version before use.

Ⓐ TABLE I. Dimensions - Continued.

Part 1/ 2/ number M83528/002X	Dimension B 3/ 4/	Dimension C 4/ 5/	Cross section area cm^2 6/
128	.103 (2.62)	1.487 (37.77)	.0083
132	.103 (2.62)	1.737 (44.12)	.0083
142	.103 (2.62)	2.362 (59.99)	.0083
155	.103 (2.62)	3.987 (101.27)	.0083

1/ "X" in the part number shall be replaced by the applicable material type.

2/ Complete part number will include an additional letter to indicate material type. Example: M83528/002A007.

3/ Tolerance on dimension B shall be ±.003 for parts with a diameter of .070 and below; ±.005 for diameters from .101 to .200.

4/ Dimensions are in inches; metric equivalents are in parentheses.

5/ Tolerance on dimension C shall be ±.010 for parts from .000 to 1.500, ±.015 for parts from over 1.500 to 2.500; ±.020 for parts from over 2.500 to 4.500.

6/ For calculation of volume resistivity (see 4.6.11) for reference only.

Source: https://assist.dla.mil --Downloaded: 2026-10-23T08:39Z
Check the source to verify that this is the current version before use.

Ⓐ TABLE II. Supersession information.

Part number 1/ M83528/002X	Superseded DESC drawing part number 85105X 1/
007	015
011	016
012	017
013	018
014	019
015	021
017	025
018	028
019	029
020	031
021	032
022	033
024	036
026	N/A
028	042
114	066
115	N/A
117	067
126	070
128	071
132	073
142	075
155	076

1/ "X" in the part number indicates the applicable material type.

CONCLUDING MATERIAL

Custodians:
Air Force - 85
Navy - EC
Army - ER

Review activities:
Air Force - 11, 19, 20, 99
NSA - NS Y22

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5999-0217)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:39Z
Check the source to verify that this is the current version before use.