INCH-POUND

MIL-G-83528/5B
30 June 1989
SUPERSEDING
MIL-G-83528/5A
9 September 1988


MILITARY SPECIFICATION SHEET


Ⓑ GASKETING MATERIAL, CONDUCTIVE, SHIELDING GASKET, ELECTRONIC, ELASTOMER, EMI/RFI, O-RING NON-STANDARD

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-G-83528.



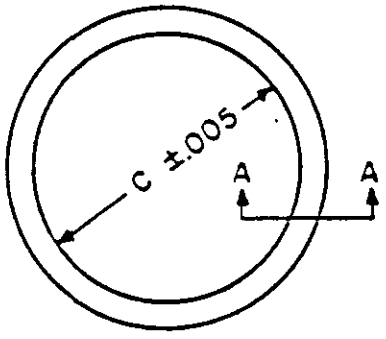

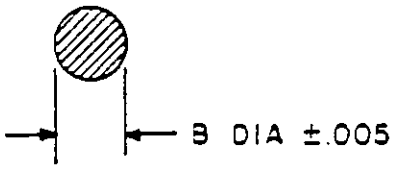

SECTION A-A

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Length to be determined according to purchase order.
4. Tolerance on flash shall be ±.008 on the extension and ±.005 on the thickness.

FIGURE 1. EMI/RFI O-ring gaskets.

Ⓑ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:40Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction: See figure 1 and table I.

(B) Material: Type A, B, C, D, E, F, H, J, K, or L.

(B) Part or Identifying Number (PIN): See table I.

Supersession information: See table II.

(B) TABLE I. Dimensions.

PIN 1/ 2/ M83528/005X	Dimensions		Cross section area cm^2 6/
	B 3/ 4/	C 3/ 5/	
001	.030 (.76)	.442 (11.23)	.0046
002	.030 (.76)	.577 (14.66)	.0046
003	.030 (.76)	.692 (17.58)	.0046
004	.030 (.76)	.817 (20.75)	.0046
005	.039 (.99)	.425 (10.80)	.0077
006	.048 (1.22)	.295 (7.49)	.0117
007	.050 (1.27)	.533 (13.54)	.0127
008	.051 (1.30)	.446 (11.33)	.0132
009	.057 (1.45)	.415 (10.54)	.0165
010	.063 (1.60)	.541 (13.74)	.0201
011	.063 (1.60)	.648 (16.46)	.0201
012	.068 (1.73)	.847 (21.51)	.0234
013	.068 (1.73)	1.182 (30.02)	.0234
014	.068 (1.73)	3.165 (80.39)	.0234
015	.070 (1.78)	.495 (12.57)	.0248
016	.070 (1.78)	.610 (15.49)	.0248
017	.070 (1.78)	.635 (16.13)	.0248
018	.070 (1.78)	.667 (16.94)	.0248
019	.070 (1.78)	.860 (21.84)	.0248

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:40Z
Check the source to verify that this is the current version before use.

Ⓑ TABLE I. Dimensions - Continued.

PIN 1/ 2/ M83528/005X	Dimensions		Cross section area cm^2 6/
	B 3/ 4/	C 3/ 5/	
020	.070 (1.78)	1.230 (31.24)	.0248
021	.103 (2.62)	1.040 (26.42)	.0538
022	.103 (2.62)	1.612 (40.94)	.0538
023	.103 (2.62)	1.790 (45.47)	.0538

Ⓑ 1/ "X" in the PIN shall be replaced by the applicable material type.

Ⓑ 2/ Complete PIN will include an additional letter to indicate material type. Example: M83528/005A001.

3/ Dimensions are in inches; metric equivalents are in parentheses.

4/ Tolerance on dimension B shall be ±.003 for parts with a diameter of .070 and below; ±.005 for diameters from .101 to .200.

5/ Tolerance on dimension C shall be ±.010 for parts from .000 to 1.500, ±.015 for parts from over 1.500 to 2.500; ±.020 for parts from over 2.500 to 4.500.

Ⓑ 6/ For calculation of volume resistivity (see 4.6.11 of MIL-G-83528). For reference only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:40Z
Check the source to verify that this is the current version before use.

TABLE II. Supersession information.

PIN 1/ M83528/005X	Superseded DESC drawing PIN 85105X 1/
001	001
002	002
003	003
004	004
005	005
006	006
007	007
008	008
009	009
010	010
011	011
012	012
013	013
014	014
015	020
016	022
017	023
018 2/	024
019	030
020	038
021	068
022	072
023	074

1/ "X" in the PIN indicates the applicable material type.

2/ Dimensions of this part are not identical to the superseded part. However, this is an authorized substitution.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Air Force - 11, 19, 20, 99
NSA - NS

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5999-0260-5)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:40Z
Check the source to verify that this is the current version before use.