|INCH-POUND|


MIL-G-83528/7D
10 July 1992
SUPERSEDING
MIL-G-83528/7C
20 February 1990

MILITARY SPECIFICATION SHEET


GASKETING MATERIAL, CONDUCTIVE, SHIELDING GASKET, ELECTRONIC, ELASTOMER, EMI/RFI, HOLLOW D-STRIP

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-G-83528.

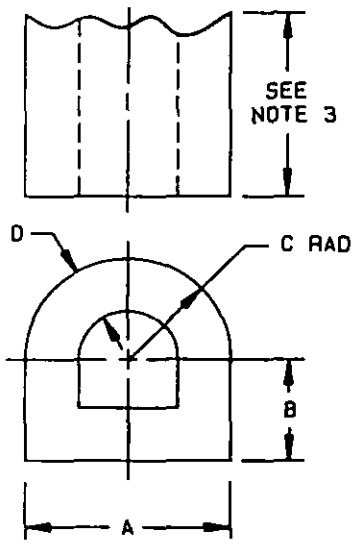

CONFIGURATION A

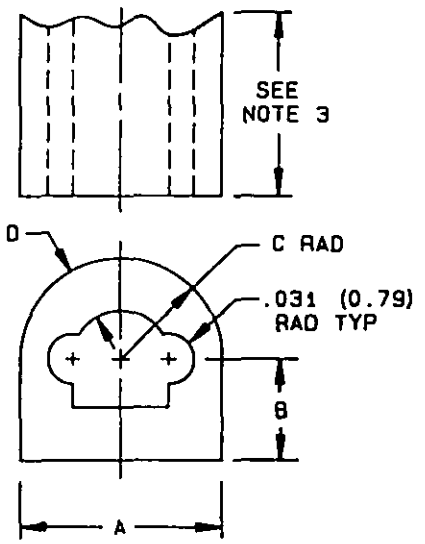

CONFIGURATION B

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Metric equivalents are in parentheses.
4. Length shall be as specified on the purchase order.

FIGURE 1. EMI/RFI gaskets, elastomer, and hollow D-strip.

(D) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:40Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction: See figure 1 and table I.

(D) Material: A, B, C, D, E, F, H, J, K, L, or M.

Part or Identifying Number (PIN): See figure 1 and table I.

Supersession information: See table II.

(D) TABLE I. Dimensions.

PIN M83528/007X 1/	2/ 3/ Nominal dimensions				Configuration	Cross section area (cm^2) 4/
	A	B	C (rad.)	D		
001	.156 (3.96)	.078 (1.98)	.078 (1.98)	.045 (1.14)	A	0.116
002	.187 (4.75)	.093 (2.36)	.093 (2.36)	.050 (1.27)	A	0.156
003	.312 (7.92)	.156 (3.96)	.156 (3.96)	.062 (1.57)	A	0.356
004	.312 (7.92)	.156 (3.96)	.156 (3.96)	.062 (1.57)	B	0.337
005	.312 (7.92)	.200 (5.08)	.112 (2.84)	.062 (1.57)	A	0.334
006	.487 (12.37)	.080 (2.03)	.244 (6.20)	.080 (2.03)	A	0.582
007	.250 (6.35)	.125 (3.18)	.125 (3.18)	.065 (1.65)	A	0.277

1/ "X" in the PIN shall be replaced by the applicable material type. Complete PIN example: M83528/007A001.

2/ Dimensions are in inches; metric equivalents are in parentheses and are given for general information only.

3/ Tolerance shall be as follows:

Dimensions	Tolerance
Under .101 (2.57)	±.005 (0.13)
.101 to .200 (2.57 to 5.08)	±.008 (0.20)
.201 to .300 (5.10 to 7.62)	±.010 (0.25)
.301 to .500 (7.62 to 12.70)	±.015 (0.38)

4/ For calculation of volume resistivity (for reference only).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:40Z
Check the source to verify that this is the current version before use.

TABLE II. Supersession information.

PIN 1/ M83528/007X	Superseded DESC drawing 1/ PIN 85106X
001	001
002	002
003	003
004	004
005	005
006	006

1/ "X" in the PIN indicates the applicable material type.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Air Force - 19, 99
NSA - NS

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5999-0286-07)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:40Z
Check the source to verify that this is the current version before use.