INCH-POUND

MIL-G-83528/9B
30 June 1989
SUPERSEDING
MIL-G-83528/9A
9 September 1988


MILITARY SPECIFICATION SHEET

Ⓑ

GASKETING MATERIAL, CONDUCTIVE, SHIELDING GASKET, ELECTRONIC, ELASTOMER, EMI/RFI, SOLID RECTANGULAR STRIPS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-G-83528.

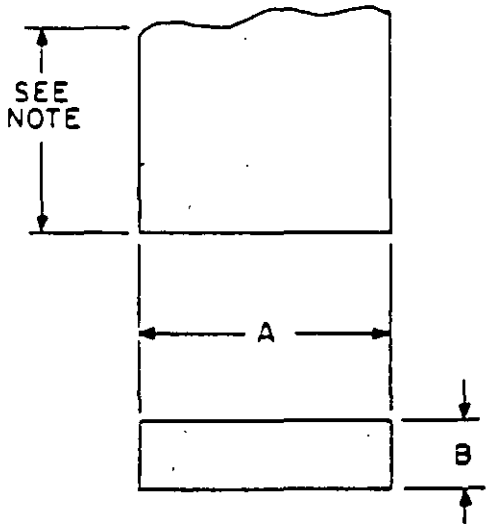

NOTE: Length shall be as specified on the purchase order.

FIGURE 1. EMI/RFI gaskets, elastomer, solid rectangular strips.

Ⓑ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:41Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction: See figure 1 and table I.

(B) Material: A, B, C, D, E, F, H, J, K, or L.

(B) Part or Identifying Number (PIN): See figure 1 and table I.

Supersession information: See table II.

TABLE I. Dimensions.

(B)

PIN M83528/009X 1/ 2/	Nominal dimensions 3/ 4/		Cross section area (cm^2) 5/
	A	B	
001	0.063 (1.60)	0.042 (1.07)	0.017
002	0.095 (2.41)	0.062 (1.57)	0.038
003	0.120 (3.05)	0.075 (1.91)	0.058
004	0.125 (3.18)	0.062 (1.57)	0.050
005	0.156 (3.96)	0.062 (1.57)	0.062
006	0.250 (6.35)	0.062 (1.57)	0.100
007	0.500 (12.70)	0.075 (1.91)	0.242
008	0.500 (12.70)	0.125 (3.18)	0.403
009	0.500 (12.70)	0.188 (4.78)	0.606
010	0.750 (19.05)	0.062 (1.57)	0.300
011	0.880 (22.35)	0.062 (1.57)	0.352
012	1.000 (25.40)	0.250 (6.35)	1.613
013	1.180 (29.97)	0.062 (1.57)	0.472

See footnotes on next page.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:41Z
Check the source to verify that this is the current version before use.

(B) 1/ "X" in the PIN shall be replaced by the applicable material type.

(B) 2/ Complete PIN will include an additional letter to indicate material type. Example: M83528/009A001.

3/ Dimensions are in inches; metric equivalents are in parentheses and are given for general information only.

4/ Tolerances shall be as follows:

Dimensions	Tolerance
Under .101 (2.57)	±.005 (0.13)
.101 to .200 (2.57 to 5.08)	±.008 (0.20)
.201 to .300 (5.10 to 7.62)	±.010 (0.25)
.301 to .500 (7.62 to 12.70)	±.015 (0.38)
Over .500 (12.70)	±.020 (0.51)

(B) 5/ For calculation of volume resistivity (surface probe). For reference only.

TABLE II. Supersession information.

(B)

PIN 1/ M83528/009X	Superseded DESC drawing 1/ PIN 85108X
001	001
002	002
003	003
004	004
005	005
006	006
007	007
008	008
009	009
010	010
011	011
012	012
013	013

(B) 1/ "X" in the PIN indicates the applicable material type.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Air Force - 11, 19, 20, 99
NSA - NS

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5999-0260-9)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:41Z
Check the source to verify that this is the current version before use.