INCH-POUND


MIL-DTL-83528/9G
20 June 2019
SUPERSEDING
MIL-DTL-83528/9F
08 March 2019

DETAIL SPECIFICATION SHEET

GASKETING MATERIAL, CONDUCTIVE, SHIELDING GASKET, ELECTRONIC, ELASTOMER, EMI/RFI, SOLID RECTANGULAR-STRIP

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the gasketing material described herein shall consist of this specification and the latest issue of MIL-DTL-83528.

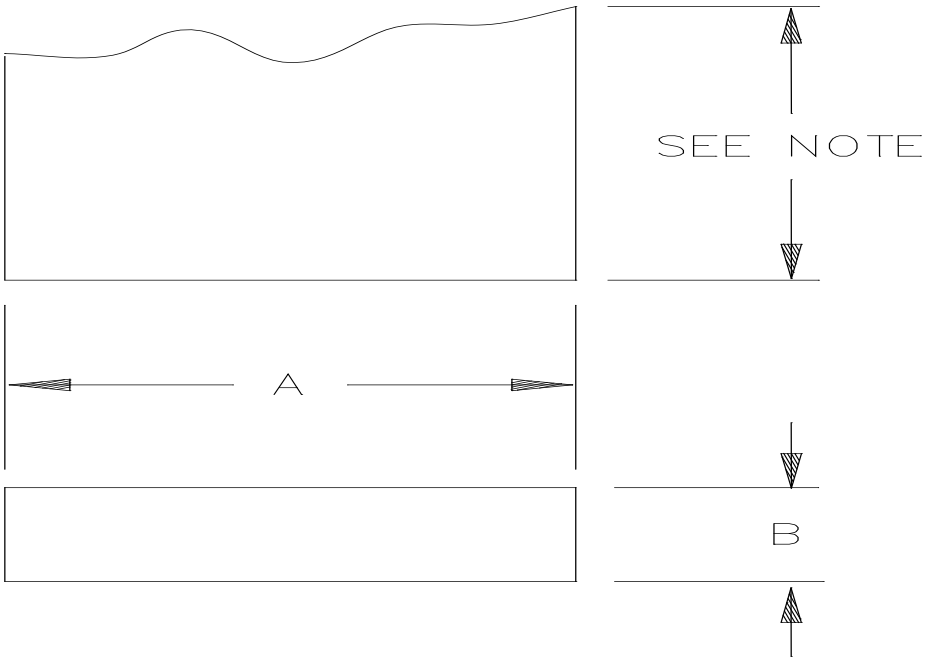

NOTE: Length shall be as specified on the purchase order.

FIGURE 1. EMI/RFI gasket, elastomer, solid rectangular strip.

AMSC N/A

FSC 5999

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:40Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and interface: See figure 1 and table I.

Material: Type A, B, C, D, E, F, H, J, K, L, or M.

Part or Identifying Number (PIN): See table I.

Supersession information: See table II.

TABLE I. Dimensions.

PIN 1/ M83528/009X	Nominal dimensions 2/ 3/		Cross section area (cm^2) 4/
	A (width)	B (height)	
001	0.063 (1.60)	0.042 (1.07)	0.017
002	0.095 (2.41)	0.062 (1.57)	0.038
003	0.120 (3.05)	0.075 (1.91)	0.058
004	0.125 (3.18)	0.062 (1.57)	0.050
005	0.156 (3.96)	0.062 (1.57)	0.062
006	0.250 (6.35)	0.062 (1.57)	0.100
007	0.500 (12.70)	0.062 (1.57)	0.242
008	0.500 (12.70)	0.075 (1.91)	0.403
009	0.500 (12.70)	0.188 (4.78)	0.606
010	0.750 (19.05)	0.062 (1.57)	0.300
011	0.880 (22.35)	0.062 (1.57)	0.352
012	1.000 (25.40)	0.250 (6.35)	1.613
013	1.180 (29.97)	0.062 (1.57)	0.472
014	0.500 (12.70)	0.075 (1.91)	0.242
015	0.500 (12.70)	0.125 (3.18)	0.403

1/ "X" in the PIN shall be replaced by the applicable material type. Complete PIN example: M83528/009A001.
2/ Dimensions are in inches; metric equivalents are given in parenthesis and are for general information only.
3/ Tolerance shall be as follows:

Dimensions		Tolerance
Under	.101 (2.57)	± .005 (0.13)
	.101 to .200 (2.57 to 5.08)	± .008 (0.20)
	.201 to .300 (5.11 to 7.62)	± .010 (0.25)
	.301 to .500 (7.65 to 12.70)	± .015 (0.38)
Over	.500 (12.70)	± .020 (0.51)

4/ For calculation of volume resistivity (for reference only).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:40Z
Check the source to verify that this is the current version before use.

TABLE II. Supersession information.

PIN 1/ M83528/009X	Superseded DESC Drawing PIN 85108X 1/
001	001
002	002
003	003
004	004
005	005
006	006
007	007
008	008
009	009
010	010
011	011
012	012
013	013

1/ "X" in the PIN indicates the applicable material type.

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Referenced documents. This document references MIL-DTL-83528.

Custodians:
Army – CR
Navy – EC
Air Force – 85
DLA – CC

Preparing activity:
DLA – CC

(Project 5999-2019-006)

Review activities:
Air Force – 19
NSA – NS

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:40Z
Check the source to verify that this is the current version before use.