INCH POUND

MIL-R 83536/13
AMENDMENT 1
15 December 1995

MILITARY SPECIFICATION SHEET

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, DPDT
LOW LEVEL TO 10 AMPERES, MAGNETIC LATCH HERMETICALLY SEALED
ALL WELDED, TRANSIENT SUPPRESSED DC COIL

This amendment forms a part of MIL-R-83536/13, dated 27 March 1992, and is approved for use by all Departments and Agencies of the Department of Defense

PAGE 1

FIGURE 1, side view Delete "SERIAL NUMBER SHALL BE MARKED ON TOP OF RELAYS"

PAGE 2


FIGURE 1, side view Delete "SERIAL NUMBER SHALL BE MARKED ON TOP OF RELAYS"

PAGE 3

FIGURE 1, side view Delete "SERIAL NUMBER SHALL BE MARKED ON TOP OF RELAYS"

PAGE 7

FIGURE 2, add the following circuit diagram

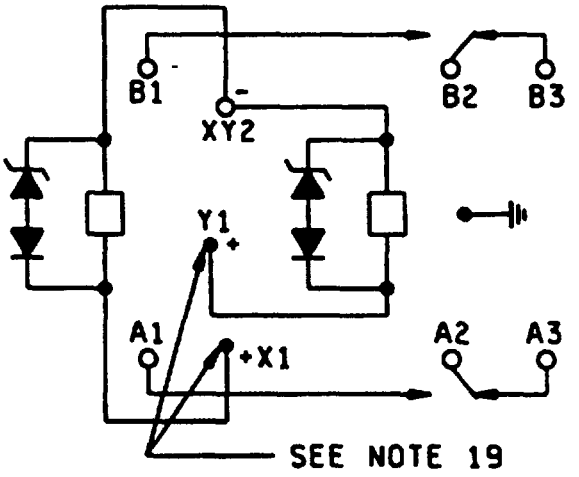

SEE NOTES 4, 5, AND 6

CIRCUIT DIAGRAM (TRACK MOUNT)
(OPTIONAL INTERNAL
DIODE CONFIGURATION)

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:52Z
Check the source to verify that this is the current version before use.

PAGE 9

Delete "Contact voltage drop or resistance " and substitute "Contact voltage drop and resistance "

Break bounce (normally open contacts) requirement Delete in its entirety

PAGE 10

Delete "Coil transient suppression Applicable " and substitute "Coil transient suppression Applicable (42 V dc maximum for track mount and 5 V dc maximum for all others) "

PAGE 11

TABLE III, delete and substitute

"TABLE III Dash numbers and characteristics 1/

Dash number 2/		Mount	Coil data						
			At 25°C				Over temperature range	Maximum pickup voltage	
Solder hook	Socket pin		Coil voltage (V dc) 3/		Coil current (amperes) maximum	Specified latch/ reset voltage (V dc) 4/	Specified latch/ reset voltage (V dc) 4/	High temperature test	Continuous current test
			Rated	Max					
001	002	RVFM	6	7 3	0 22	3 2	4 5	5 0	5 7
003		HFM	6	7 3	0 22	3 2	4 5	5 0	5 7
004	005	RVFM	12	14 5	0 11	6 5	9 0	9 9	11 25
006		HFM	12	14 5	0 11	6 5	9 0	9 9	11 25
007	008	RVFM	28	29 5/	0 075	14 5	18 0	19 8	22 5
009		HFM	28	29 5/	0 075	14 5	18 0	19 8	22 5
	010	Track	28	29 5/	0 075	14 5	18 0	19 8	22 5
011	012	RVFM	48	50	0 040	24 0	36 0	38 0	42 0
013		HFM	48	50	0 040	24 0	36 0	38 0	42 0

1/ Each relay possesses high level and low level capabilities However, relays previously tested or used above 10 mA resistive at 6 V dc maximum or peak ac open circuits are not recommended for subsequent use in low level applications

2/ The suffix letter L, M, P, or R to designate the applicable failure rate level shall be L 3 0, M, 1 0, P, 0 1 R, 0 01 Example 001L, 002R

3/ CAUTION The use of any coil voltages less than the rated coil voltage will compromise the operation of the relay

4/ Pickup voltage as shown is for test purposes only and is not to be used for design criteria

5/ When maximum ambient temperature does not exceed +85°C, the maximum coil voltage shall be 32 V dc "

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:52Z
Check the source to verify that this is the current version before use.

Dielectric withstanding voltage Track mount Coil to coil/Coil to case Sea level, After life Delete "1250" and substitute "1050"

Dielectric withstanding voltage Track mount, Altitude, At 300,000 feet Delete "500" and substitute "N/A" (2 places)

Dielectric withstanding voltage, Track mount, All other points, Sea level, Initial Delete "1000" and substitute "1500"

Delete "Maximum leakage current 100 microamperes rms in accordance with MIL-R-83536 " and substitute "Maximum leakage current for track mount only 100 microamperes rms "

Vibration (random), first paragraph, line 2 Delete "test condition IJ" and substitute "test condition IG"

Vibration (random), second paragraph, line 2 Delete "15 minutes each plane"

Weight, delete in its entirety and substitute "Weight 0.90 pound (40.9 grams), 0.120 (54.5 grams) for track mount "

CONCLUDING MATERIAL

Custodians
Army - ER
Navy - EC
Air Force - 85

Review activities
Air Force - 99
DLA - ES

Preparing activity
Air Force - 85

Agent
DLA ES

(Project 5945-0964-11)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:52Z
Check the source to verify that this is the current version before use.