INCH-POUND

MIL-R-83536/19
AMENDMENT 1
15 December 1995

MILITARY SPECIFICATION SHEET

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, 4PDT, LOW LEVEL TO 10 AMPERES, MAGNETIC LATCH, HERMETICALLY SEALED, ALL WELDED, TRANSIENT SUPPRESSED DC COIL

This amendment forms a part of MIL-R-83536/19, dated 27 March 1992, and is approved for use by all Departments and Agencies of the Department of Defense

PAGE 1

FIGURE 1, side view Delete "SERIAL NUMBER SHALL BE MARKED ON TOP OF RELAYS"


FIGURE 1, side view, dimension 1.025 Add "SQ"

PAGE 2

FIGURE 1, side view Delete "SERIAL NUMBER SHALL BE MARKED ON TOP OF RELAYS"

PAGE 7

FIGURE 2, add the following circuit diagram

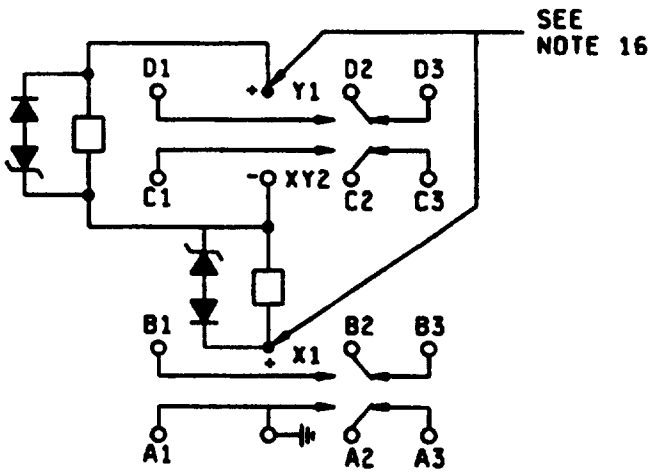

SEE NOTES 4, 5, AND 6

CIRCUIT DIAGRAM (TRACK MOUNT)
(ALTERNATE INTERNAL
DIODE CONFIGURATION)

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:53Z
Check the source to verify that this is the current version before use.

PAGE 8

Delete "Contact voltage drop or resistance " and substitute "Contact voltage drop and resistance "

Break bounce requirement delete in its entirety

PAGE 9

Delete "Coil transient suppression Applicable " and substitute "Coil transient suppression Applicable (42 V dc maximum for track mount and 5 V dc maximum for all others) "

PAGE 10

TABLE III, delete and substitute

"TABLE III Dash numbers and characteristics 1/

Dash number 2/		Mount	Coil data						
			At 25°C				Over temperature range	Maximum pickup voltage	
Solder hook	Socket pin		Coil voltage (V dc) 3/		Coil current (amperes) maximum	Specified latch/ reset voltage (V dc) 4/	Specified latch/ reset voltage (V dc) 4/	High temperature test	Continuous current test
			Rated	Max					
001	002	RVFM	6	7 3	0 300	3 5	4 5	5 0	5 7
003		HFM	6	7 3	0 300	3 5	4 5	5 0	5 7
004	005	RVFM	12	14 5	0 150	6 5	9 0	9 9	11 25
006		HFM	12	14 5	0 150	6 5	9 0	9 9	11 25
007	008	RVFM	28	29 5/	0 072	14 5	18 0	19 8	22 5
009		HFM	28	29 5/	0 072	14 5	18 0	19 8	22 5
	010	Track	28	29 5/	0 072	14 5	18 0	19 8	22 5
011	012	RVFM	48	50	0 038	24 0	36 0	38 0	42 0
013		HFM	48	50	0 038	24 0	36 0	38 0	42 0

1/ Each relay possesses high level and low level capabilities However, relays previously tested or used above 10 mA resistive at 6 V dc maximum or peak ac open circuits are not recommended for subsequent use in low level applications
2/ The suffix letter L, M, P, or R to designate the applicable failure rate level shall be L, 3 0, M, 1 0, P, 0 1, R, 0 01 Example 001L, 002R
3/ CAUTION The use of any coil voltage less than the rated coil voltage will compromise the operation of the relay
4/ Pickup voltage as shown is for test purposes only and is not to be used for design criteria
5/ When maximum ambient temperature does not exceed +85°C, the maximum coil voltage shall be 32 V dc "

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:53Z
Check the source to verify that this is the current version before use.

PAGE 11

Dielectric withstanding voltage, Track mount, All other points Initial Delete "1000" and substitute "1500"

Dielectric withstanding voltage, Track mount, Coil to coil/Coil to case Sea level, After life Delete "1250" and substitute "1050"

Dielectric withstanding voltage, Track mount, Altitude, At 300,000 feet Delete "500" and substitute "N/A" (2 places)

Maximum leakage current, delete in its entirety and substitute "Maximum leakage current for track mount only 100 microamperes rms "

Vibration (random), first paragraph, line 2 Delete "test condition "IJ" and substitute "test condition IG"

Vibration (random), second paragraph, line 2 Delete "15 minutes each plane"

Weight Delete "(77 2 g's)" and "(90 9 g's)" and substitute "(77 2 grams)" and "(90 9 grams)"

PAGE 13

TABLE V, second column Delete "028" and substitute "010"

CONCLUDING MATERIAL

Custodians
Army - ER
Navy - EC
Air Force - 85

Review activities
Air Force - 99
DLA - ES

Preparing activity
Air Force - 85

Agent
DLA - ES

(Project 5945-0964-15)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:53Z
Check the source to verify that this is the current version before use.