INCH-POUND

MIL-R-83536/2
AMENDMENT 2
30 September 1996
SUPERSEDING
AMENDMENT 1
15 December 1995

MILITARY SPECIFICATION SHEET

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, DPDT, LOW LEVEL TO 5 AMPERES, PERMANENT MAGNET DRIVE, HERMETICALLY SEALED, ALL WELDED, TRANSIENT SUPPRESSED DC COILS

This amendment forms a part of MIL-R-83536/2, dated 27 March 1992, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1


FIGURE 1, side view: Delete "SERIAL NUMBER SHALL BE MARKED ON TOP OF RELAYS".

PAGE 2

FIGURE 1, side view: Delete "SERIAL NUMBER SHALL BE MARKED ON TOP OF RELAYS".

PAGE 4

FIGURE 1, track mount A, side view, delete and substitute the following:

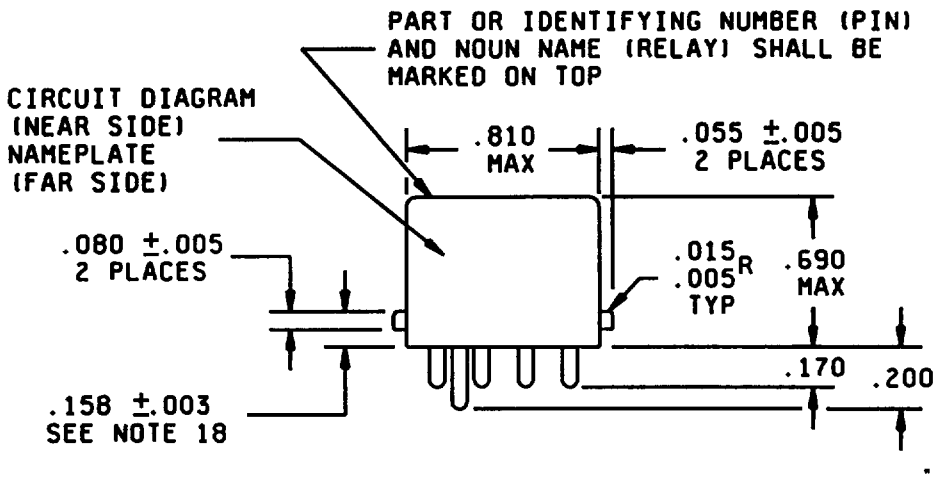

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:44Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:44Z
Check the source to verify that this is the current version before use.

INCH-POUND

MIL-R-83536/2
AMENDMENT 2
30 September 1996
SUPERSEDING
AMENDMENT 1
15 December 1995

MILITARY SPECIFICATION SHEET

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, DPDT, LOW LEVEL TO 5 AMPERES, PERMANENT MAGNET DRIVE, HERMETICALLY SEALED, ALL WELDED, TRANSIENT SUPPRESSED DC COILS

This amendment forms a part of MIL-R-83536/2, dated 27 March 1992, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1

FIGURE 1, side view: Delete "SERIAL NUMBER SHALL BE MARKED ON TOP OF RELAYS".


PAGE 2

FIGURE 1, side view: Delete "SERIAL NUMBER SHALL BE MARKED ON TOP OF RELAYS".

PAGE 4

FIGURE 1, track mount A, side view, delete and substitute the following:

"

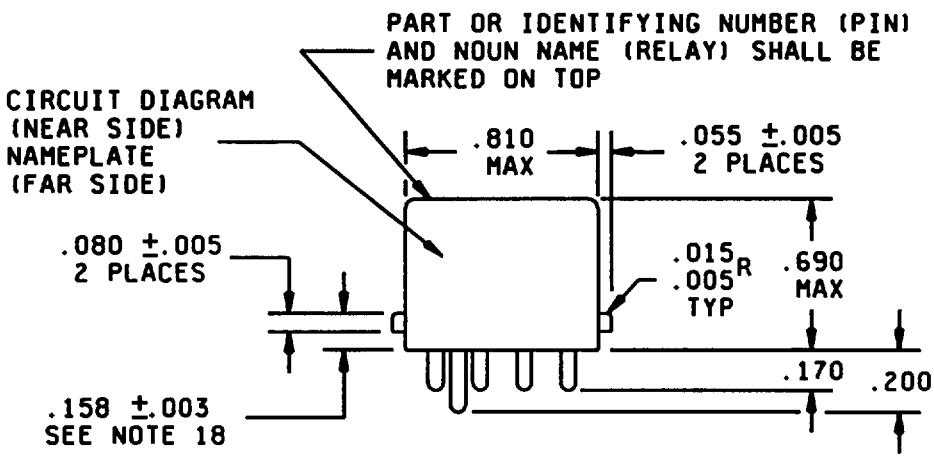


"

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:44Z
Check the source to verify that this is the current version before use.

PAGE 6

FIGURE 1, add the following circuit diagram between the existing diagrams:

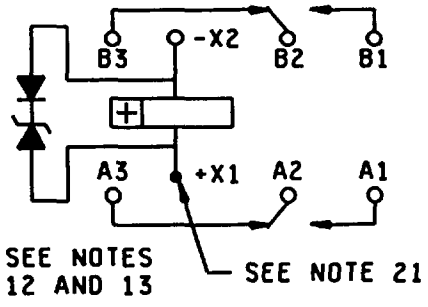

CIRCUIT DIAGRAM (NO MOUNT, RVFM, HFH AND TRACK MOUNT A)
(OPTIONAL INTERNAL
DIODE CONFIGURATION)

PAGE 7

NOTE 9, second sentence, delete and substitute: "Relays shall be marked with the manufacturer's name or CAGE code and the date code."

PAGE 8

Delete "Contact voltage drop or resistance:" and substitute "Contact voltage drop and resistance:".

PAGE 9

Coil data; coil transient suppression: Delete "at".

PAGE 10

* TABLE III, Coil resistance (ohms) minimum column, 28 V dc rated coil voltage (5 places): Delete "450" and substitute "440" (5 places).

PAGE 12

Delete "Maximum leakage current: 100 microamperes rms in accordance with MIL-R-83536." and substitute "Maximum leakage current for track mount only: 100 microamperes rms."

Vibration (random), first and second paragraphs: Delete "15 minutes each plane" (2 places).

PAGE 13

Weight: Delete "(20.4 g's)" and "(15.4 g's)" and substitute "(20.4 grams)" and "(15.4 grams)".

PAGE 14

TABLE V, last line: Delete "21-003" and "028".

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:44Z
Check the source to verify that this is the current version before use.

The margins of this amendment are marked with an asterisk to indicate where changes from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based upon the entire content irrespective of the marginal notations and relationship to the last previous amendment.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Air Force - 99
DLA - ES

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5945-0993-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:44Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:44Z
Check the source to verify that this is the current version before use.