NOT MEASUREMENT SENSITIVE


MIL-B-3628/105
22 December 1994

MILITARY SPECIFICATION SHEET

BADGE, QUALIFICATION, CIVIL ENGINEER, AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense


The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-3628.

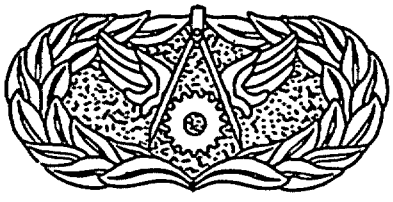

DASH -1



DASH-2

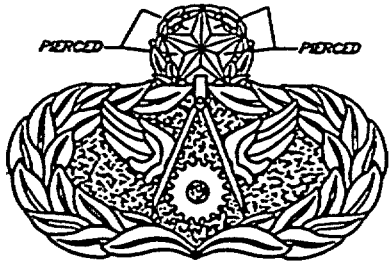

DASH -3

DASH NO.
-1: Basic, Regular Size
-2: Senior, Regular Size
-3: Master, Regular Size

MATERIAL: Red Brass or Nickel Silver

FINISH: Nickel Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 16.

DIMENSIONS:
HEIGHT (Overall):
-1: 3/4 inch (1.91 cm) (REF)
-2: 1-1/16 inches (2.70 cm) (REF)
-3: 1-3/16 inches (3.02 cm) (REF)
WIDTH (Overall): 1-5/8 inches (4.13 cm)
THICKNESS (At Thickest Point): 0.120 inch ± 0.010 inch (0.304 cm ± 0.025 cm)

AMSC N/A

FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:35Z
Check the source to verify that this is the current version before use.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Piercing shall be as indicated.

3. The attaching device shall be prong and clutch type. The prongs shall be located at each intersection of the horizontal center line of the badge and the center of the wreath.

Custodian:
Army - IH
Air Force - 45

Review activities:
Air Force - 32, 82, 99
DLA - CT

Preparing activities:
Army - IH

(Project No. 8455-0790)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:35Z
Check the source to verify that this is the current version before use.