NOT MEASUREMENT SENSITIVE


MIL-DTL-3628/116C(IH)
14 March 2024
SUPERSEDING
MIL-DTL-3628/116B(IH)
13 May 2019

DETAIL SPECIFICATION SHEET

BADGE, IDENTIFICATION, NURSE CADET PROGRAM, U.S. ARMY ROTC

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

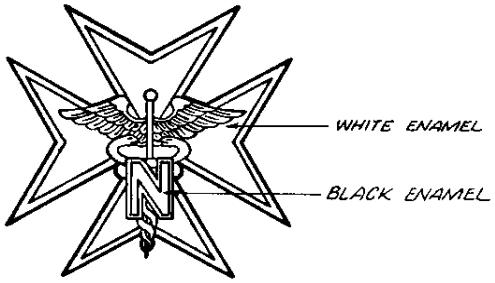

MATERIAL: Red Bra 85/15 (UNS Alloy No. C-230)

FINISH:
MALTESE CROSS: Epoxy resin (Stoning epoxy) 24K, Gold Plated Mirror-like Polish and shall match The Institute of Heraldry (TIOH) Metal finish Chip Number 6.
CADUCEUS: Epoxy resin (Stoning epoxy) 24K Gold Plated, Matte Finish, and shall match TIOH Metal Finish Chip Number 7.

DIMENSIONS:
MALTESE:
HEIGHT (Overall): 53/64 inch (REF)
WIDTH (Overall): 53/64 inch (REF)
THICKNESS: (At thickest point): 0.065 inch ± 0.005 inch
CADUCEUS:
HEIGHT (Overall): 1/2 inch (REF)
WIDTH (Overall): 39/64 inch (REF)
THICKNESS (Letter "N"): 0.075 inch ± 0.005 inch
ASSMBLED (Letter "N"): 0.140 inch ± 0.010 inch

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:38Z
Check the source to verify that this is the current version before use.

EPOXY: Epoxy resin shall be applied to the Badge Qualification as indicated above and shall match TIOH Hard Enamel Color Chip Numbers listed below.
If hard enamel is used, then the material will be Gilding Metal 95/5 (UNS Alloy C-210).

TIOH HARD ENAMEL COLOR CHIPS	
COLOR	**CHIP NUMBER**
Black	#26
White	#28

ATTACHING DEVICE AND CADUCEUS:

1 The attaching device shall be prong and wing type clutch.

2. Two prongs shall be located on the vertical center line, equidistant from each end and 9/16 inch ± 1/64 inch apart.

3. The caduceus shall be located as shown and shall be secured to the cross by one hollow rivet.

4. At the option of the manufacturer for commercial sale only, insignia may be manufactured using 22 karat gold plate with nickel underplating. The Maltese Cross shall have a mirror-like polished finish which shall match TIOH Metal Finish Chip Number 9. The Caduceus shall have a matte finish which shall match TIOH Metal Finish Chip Number 10.

NOTE:

The term (REF) refers to the measurements taken from the Government furnished hub or die.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2024-078)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:38Z
Check the source to verify that this is the current version before use.