INCH POUND

MIL-PRF-3098/16G
27 August 1997
SUPERSEDING
MIL-C-3098/16F
4 October 1976

PERFORMANCE SPECIFICATION SHEET

CRYSTAL UNIT, QUARTZ, CR36A/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-3098.

Pertinent characteristics: 0.8 MHz to 20 MHz; fundamental; controlled; antiresonance.

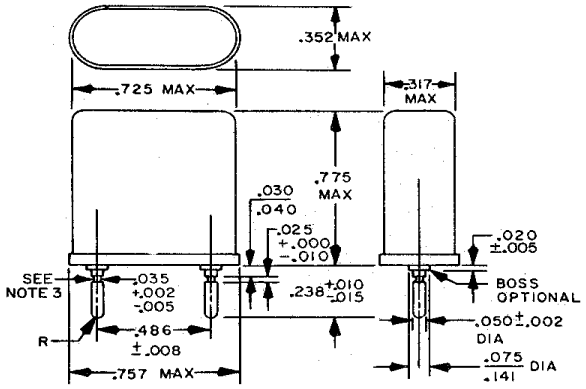

Inches	mm	Inches	mm
.002	.05	.050	1.27
.005	.13	.075	1.91
.008	.20	.141	3.58
.010	.25	.238	6.05
.015	.38	.317	8.05
.020	.51	.352	8.94
.025	.64	.486	12.34
.030	.76	.725	18.42
.035	.89	.757	19.23
.040	1.02	.775	19.69

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. The pin undercut may be omitted.
4. Marking to be in accordance with MIL-PRF-3098.

FIGURE 1. Crystal unit - CR36A/U.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:20Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions, marking, and configuration: See figure 1.

Frequency range: 0.8 MHz to 20 MHz, inclusive.

Capacitance, shunt: 7 pF, maximum.

Frequency tolerance:

Operating temperature range: ±20 parts per million (ppm).

Room temperature: ±80 ppm.

Frequency stability: ±5 ppm.

Equivalent resistance: See table I.

Antiresonance, load capacitance: 32.0 pF ±0.5 pF.

Mode of oscillation: Fundamental.

Reference temperature: +85°C ±1°C.

Temperature ranges:

Operable: -55°C to +80°C, inclusive.

Operating (controlled): +80°C to +90°C, inclusive.

Rated drive level: 1.0 mW, maximum.

Shock (specified pulse):

Frequency change permitted: ±5 ppm.

Equivalent resistance change permitted: Below 2MHz: ±15 percent
2.0 MHz and above: ±10 percent

Vibration: Method 201 of MIL-STD-202.

Frequency change permitted: ±5 ppm.

Equivalent resistance change permitted: Below 2MHz: ±15 percent
2.0 MHz and above: ±10 percent

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:20Z
Check the source to verify that this is the current version before use.

Thermal shock:

Frequency change permitted: ±5 ppm.

Equivalent resistance change permitted: Below 2MHz: ±15 percent
2.0 MHz and above: ±10 percent

Aging:

Frequency change permitted: ±5 ppm.

TABLE II. Equivalent resistance.

Frequency range, inclusive	Maximum resistance
MHz	Ohms
0.80 to 0.85	620
0.85+ to 0.90	600
0.90+ to 1.00	570
1.00+ to 1.12	540
1.12+ to 1.25	490
1.25+ to 1.37	450
1.37+ to 1.50	410
1.50+ to 1.62	370
1.62+ to 1.75	330
1.75+ to 1.87	300
1.87+ to 2.00	290
2.00+ to 2.12	270
2.12+ to 2.25	240
2.25+ to 2.60	190
2.60+ to 3.00	150
3.00+ to 3.40	110
3.40+ to 3.75	90
3.75+ to 4.00	75
4.00+ to 5.00	60
5.00+ to 7.00	35
7.00+ to 10.00	24
10.00+ to 15.00	22
15.00+ to 20.00	20

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:20Z
Check the source to verify that this is the current version before use.

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - CR
Navy - EC
Air force - 85

Review activities:
Army - AR, MI
Navy - AS, CG, MC, SH
Air Force - 17, 19
DLA - CC

Preparing activity:
Army - CR

Agent:
DLA - CC

(Project 5955-0697-08)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:20Z
Check the source to verify that this is the current version before use.