
MILITARY SPECIFICATION SHEET

CRYSTAL UNIT, QUARTZ, CR-25B/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the crystal unit described herein shall consist of this document and the latest issue of Specification MIL-C-3098.

Pertinent characteristics: 200 to 555 kHz; fundamental: noncontrolled; series.

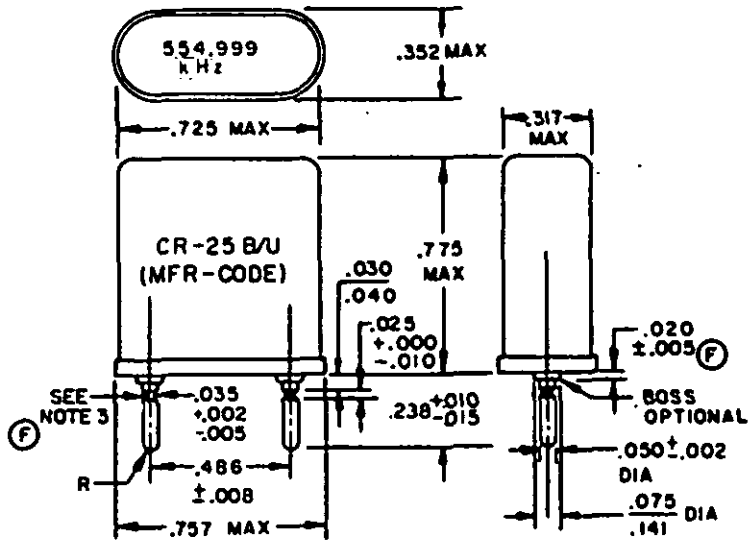

INCHES	MM	INCHES	MM
.002	.05	.050	1.27
.005	.13	.075	1.91
.008	.20	.141	3.58
.010	.25	.238	6.05
.015	.38	.317	8.05
.020	.51	.352	8.94
.025	.64	.486	12.34
.030	.76	.725	18.42
.035	.89	.757	19.23
.040	1.02	.775	19.69

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
(F) 3. The pin undercut may be omitted.

(F) denotes change

FSC 5955

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:17Z
Check the source to verify that this is the current version before use.

TABLE I. Requirements.

Requirement	Specified value or condition
Holder	HC-6/U (MIL-H-10056/2)
Dimensions, marking, and configuration	See figure
Frequency range	200 to 555 kHz, inclusive
Frequency tolerance	±100 PPM
Equivalent resistance	See table III
Mode of oscillation	Fundamental
Operating temperature range	-40° to +85°C, inclusive
Test set, calibration values, and rated drive level	See table II
Shock (specified pulse):	
Frequency change permitted	±10 PPM
Equivalent resistance change permitted	±15 percent
Vibration: 1/	
Frequency change permitted	±10 PPM
Equivalent resistance change permitted	±15 percent
Temperature run:	
Frequency change permitted	±10 PPM
Equivalent resistance change permitted	±15 percent
Bond strength:	kHz — Grams, minimum
	200 to 250 — 700
	250+ to 320 — 500
	320+ to 370 — 400
	370+ to 435 — 300
	435+ to 555 — 250

1/ Method 201 of MIL-STD-202.

TABLE II. Test set, calibration values, and rated drive level.

Government reference standard test set	Band of specified frequencies, inclusive	Calibration values			Rated drive level
		Resistance	Crystal current	Resistor voltage drop	
	kHz	Ohms	ma	Volts	mw
TS-710/TSM	200 to 225	1800	---	1.90	2.0 ±0.4
	225+ to 265	2100	---	2.05	
	265+ to 290	2500	---	2.24	
	290+ to 330	2800	---	2.37	
	330+ to 370	3200	---	2.53	
	370+ to 410	3500	---	2.65	
	410+ to 425	3900	---	2.79	
	425+ to 460	4600	---	3.03	
	460+ to 555	5300	---	3.26	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:17Z
Check the source to verify that this is the current version before use.

TABLE III. Equivalent resistance.

Frequency range, inclusive	Maximum resistance
kHz	Ohms
200 to 225	2,500
225+ to 265	3,000
265+ to 290	3,500
290+ to 330	4,000
330+ to 370	4,500
370+ to 410	5,000
410+ to 425	5,500
425+ to 460	6,500
460+ to 555	7,500

NOTES:

(F) 1. The socket designed to mate with crystal holder HC-6/U is Part No. M12883/04-01 (see MIL-S-12883/4).
For Navy use, other sockets listed in MIL-STD-242 may be used.

(F) 2. NATO preferred type NXT4/B.

Custodians:
Army - EL
Navy - EC
Air Force - 84

Review activities:
Army - EL, MI, MU, SG, SM
Navy - EC
Air Force - 11, 85
DSA - ES

User activities:
Army -
Navy - AS, MC, SH
Air Force - 17, 19

Preparing activity:
Army - EL

Agent:
DSA - ES

(Project 5955-0408-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:17Z
Check the source to verify that this is the current version before use.