INCH-POUND

MIL-A-48607B (AR)
18 January 1991
SUPERSEDING
MIL-A-48607A (AR)
15 March 1982

MILITARY SPECIFICATION

AMPLIFIER, DOPPLER ASSEMBLY: 11740261

This specification is approved for use within the U. S. Army Armament, Munitions and Chemical Command, and Is available for use by all Deparpments and Agencies of the Department of Defense.

1. SCOPE

1.1 **Scope.** This specification covers the requirements, quality assurance provisions, and packaging for a doppler amplifier assembly used in Radar Receiver R-1475, part of Radar Set AN/VPS-2 (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards and handbooks. The following specifications, standards and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

MILITARY

MIL-F-13926 - Fire control Materiel, Manufacture and Inspection, General Specification for
MIL-I-45607 - Inspection Equipment, Acquisition, Maintenance and Disposition of

Benefiial comments (recommendations, additions)and any pertinent data which may be of use improving this document should be addressed to: Commander,U.S. Army, ARDEC, ATTN:SMCAR-BACS, Picatinny Arsenal, New Jersey 07806-5000 by using the self-addressed Standardization document Improvement Proposal (DD Form 1426) appearomg at the end of this document or by lettcr.

Source: https://assist.dla.mil -- Downloaded: 2026t0-22T19:33Z
Check the source to verify that this is the currentversion before use.

STANDARDS

MILITARY

MIL-STD-109 - Quality Assurance Terms and Definitions
MIL-STD-810 - Environmental Test Methods and Engineering Guidelines
MIL-STD-2000 - Standard Requirements for Soldering Electrical and Electronic Assemblies

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings and publications. The following other Government documents, drawings and Publications form a part of this specification to the-extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

DRAWINGS (See 6.4)

U. S. ARMY ARMAMENT RESEARCH, DEVELOPMENT AND ENGINEERING CENTER (ARDEC)

11740261 - Doppler Amplifier

SPECIAL PACKAGING INSTRUCTION

PS 11740261 - packaging of Doppler Amplifier

(Copies of drawings, publications and other Government documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 order of precedence. In the event of conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence. Nothing in this specification, *however,* shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Materials. Materials shall be in accordance with the applicable drawings and specifications.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:33Z
Check the source to verify that this is the current version before use.

3.2 Components and assemblies. The components and assemblies shall comply with all requirements specified on Drawing 11740261, all associated drawings, and with all requirements specified in applicable specifications and standards. Where applicable, the doppler amplifier shall meet the requirements of MIL-F-13926 as follows:

a. Dimensions and tolerances.
b. Inorganic protective surface finishings.
c. Part identification and marking.
d. Workmanship.

3.3 Environmental service conditions.

3.3.1 Vibration. The doppler amplifier shall not suffer damage and shall meet the requirements of 3.4 and 3.5 after exposure to sinusoidal vibrations, in each of three mutually perpendicular axes, as follows:

Frequency Range	Amplitude
10 to 15 hertz	0.06 inches double amplitude
15 to 25 hertz	0.04 inches double amplitude
25 to 55 hertz	0.02 inches double amplitude

The frequency of vibration shall be swept logarithmically.
The cycling time shall be 120 minutes per axis.
The sweep rate shall be 3.75 minutes ± 10% per decade.
The 10-55-10 hertz sweep time is 3 minutes 45 seconds ± 10%.

3.3.2 Shock. The doppler amplifier shall not suffer damage and shall meet requirements of 3.4 and 3.5 after exposure to a total of 18 impulse shocks consisting of three shock impulses Of 15 g's ± 10%, 11 milliseconds + 10%, half-sine wave applied in each direction of 3 mutually perpendicular axes.

3.3.3 Altitude.

3.3.3.1 Operating. The doppler amplifier shall meet the requirements of 3.4 and 3.5 during and after exposure to barometric pressure encountered at 10,000 feet above sea level (20.6 inches of Hg).

3.3.3.2 Non-operating. The doppler amplifier shall meet the requirements of 3.4 and 3.5 after exposure for not less than 10 minutes to, barometric pressure encountered at 40,000 feet above sea level (5.5 inches of Hg).

3.3.4 Temperature.

3.3.4.1 Operating. The doppler amplifier shall meet the requirements of 3.4 and 3.5 when stabilized thermally at any temperature between -40 deg F and +155 deg F.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:33Z
Check the source to verify that this is the current version before use.

3.3.4.2 Non-operating (storage). The doppler amplifier shall not suffer permanent damage when subjected to the constant temperature extremes of -60 deg F for a period of 24 hours and +160 deg F for a period of 4 hours (after temperature stabilization), and shall meet the requirements of 3.4 and 3.5 when returned to room ambient.

3.3.5 Humidity (non-operating) The doppler amplifier shall meet the requirements of 3.4 and 3.5 after exposure to an atmosphere with a relative humidity in excess of 95 percent for a period of 10 days.

3.4 Electrical. Each conductor shall be electrically continuous as specified on the schematic diagram of the doppler amplifier.

3.5 Performance.

3.5.1 Input voltage. The input voltage to the doppler amplifier shall be 25.0 ± 0.1 volts direct current (Vdc) at 50 milliamperes (ma) applied to A1J1-1(+) and A1J1-2(RET), also A2J1-1(+) and A2J1-2(RET).

3.5.2 Output noise. With the input terminals El and E2 of both Al and AZ open circuited, the output noise measured at A1J1-A1 and A2J1-A1 shall be 50 millivolts (mV) peak-to-peak (P-P) maximum, excluding any 60 Hz noise.

3.5.3 Gain. The gain of each amplifier Al and A2 shall be 79.0 ± 1.5 DB when a 1 KHz signal is applied to terminals El and E2(RET) at a level sufficient to produce 300.0 ± 0.1 mV at the output J1-A1.

3.5.4 Frequency response. The frequency response of each amplifier Al and A2 shall be as follows:

a. With the input level held constant at that level required to meet the condition of 3.5.3, and the input frequency varied between 900 Hz and 10 KHz, the output level measured at J1-A1 shall not vary more than a total of 1.0 DB.

b. When the input frequency is increased to 20 KHz, the output level at J1-A1 shall be at least 2 DB below the highest output level observed between 900 Hz and 10 KHz.

3.5.5 Limiting action. The limiting action of each amplifier Al and A2 shall be as follows:

a. When the input signal at 1 KHz applied to terminals El and E2(RET) has its level adjusted to just below output limiting (limiting threshold), the output voltage at J1-A1 shall be 1.5 ± 0.5 volts P-P.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:33Z
Check the source to verify that this is the current version before use.

b. When the input level is increased by 20 DB and 40 DB above limiting threshold, the output level at J1-A1 shall not be greater than 2.o volts P-P.

3.6 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection in accordance with the technical provisions herein (see (4.3).

3.7 Soldering. All soldering shall be in accordance with the general requirements of MIL-STD-2000 in addition to detail requirement task F of paragraph 1.2 of MIL-STD-2000.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of Sections 3 and 5 and all applicable drawings. The inspection set forth in this specification shall become part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 General provisions. The component and subassembly inspection requirements of MIL-F-13926 form a part of the quality assurance provisions of this specification. Reference shall be made to MXL-STD-1o9 to define quality assurance terms used herein.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).
c. Special sampling inspection (see 4.5).

Source: https://assist.dla.mil -- Downloaded: 2026l0-22T19:33Z
Check the source to verify that this is the currentversion before use.

4.2.1 Inspection conditions. Unless otherwise specified, all examinations and tests shall be conducted at the following standard ambient conditions:

a.	Temperature	+50 deg to +90 deg F
b.	Relative humidity	90% RH max.
c.	Pressure	28 to 32 inches of Hg

4.3 First article inspection.

4.3.1 First article submission. The contractor shall submit a first article sample as designated by the contracting officer consisting of three (3) doppler amplifiers for inspection in accordance with 4.3.2.

4.3.2 Inspections to be performed. First article assemblies, components and test specimens may be subjected by the Government to any or all of the examinations and tests specified in Table I (Functional Test) and Table II (Special Sampling) herein and to any or all requirements of the applicable drawings.

4.3.3 Rejection. If any assembly, component or test specimen fails to comply with any of the applicable requirements, the first article sample shall be rejected. The Government reserves the right to terminate its inspection upon any failure of any assembly, component or test specimen to comply with any of the stated requirements.

4.4 Quality conformance inspection.

4.4.1 Inspection lot formation. The term “inspection lot” is defined as a homogeneous collection of units of product from which a representative sample is drawn or which is inspected 100 percent to determine conformance with applicable requirements. Units of product selected for inspection shall represent only the inspection lot from which they are drawn and shall not be construed to represent any prior or subsequent quantities presented for inspection. Homogeneity shall be considered to exist provided the inspection lot has been produced by one manufacturer, in one unchanged process, using the same materials and methods, in accordance with the same drawings, same drawing revisions, same specifications and same specification revisions. All material submitted for inspection in accordance with this specification shall comply with the homogeneity criteria specified herein, regardless of the type of inspection procedure which is being applied to determine conformance with requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:33Z
Check the source to verify that this is the current version before use.

4.4.2 Examinations and tests.

4.4.2.1 ComponentS, assemblies and subassemblies. All components, assemblies and subassemblies shall be inspected in accordance-with the inspection provisions contained in this specification and the Quality Assurance Provisions (QAP) listed in the Technical Data Package (TDP). In the absence of QAPs, the applicable quality assurance provisions of MIL-F-13926 shall apply.

4.4.2.2 Final acceptance inspection. Subsequent to first article approval, examinations and tests related to Section 3 herein shall be performed on a single defect (individual characteristic) basis in accordance with the sampling plans specified in 4.4.2.3 herein. Examination and test for packaging and marking shall be in accordance with Section 5 herein. The tabulated classification of defects in 4.4.2.3 shall constitute the minimum inspection to be performed by the contractor after first article approval and prior to Government acceptance or rejection by item or lot.

4.4.2.3 Functional tests. The tests in Table I shall be performed on a 100% basis.

TABLE 1. Functional tests (100 Percent inspection).

CHARACTERISTIC	REQUIREMENT	TEST PROCEDURE
Critical:	None	N/A
MAJOR:		
101. Electrical	3.4	4.7.2
102. Performance	3.5	4.7.3
Minor:	None	N/A

4.5 Special sampling. one doppler amplifier out of the first 50 Produced and one out of each 100 produced thereafter shall be selected at random. The sample shall have met the requirements and tests of Table I and shall then meet the tests in Table 11. Unless otherwise specified in the contract, the items shall be returned to the lot upon successful completion of testing.

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:33Z
Check the source to verify that this is the current version before use.

TABLE II. Special sampling.

CHARACTERISTIC	REQUIREMENT	TEST PROCEDURE
Critical:	None	N/A
Major:		
103. Vibration	3.3.1	4.7.1.1
104. Shock	3.3.2	4.7.1.2
105. Altitude	3.3.3	4.7.1.3
106. Temperature	3.3.4	4.7.1.4
107. Humidity	3.3.5	4.7.1.5
Minor:	None	N/A

4.5.1 Failure of sample. Should any one item of a special sampling fail to meet any of the specified test requirements, acceptance of the product shall be suspended by the Government until necessary corrections to all production since the last test as well as to current production has been accomplished in accordance with the provisions of the contract.

4.6 Inspection equipment.

4.6.1 Government-furnished inspection equipment. Where the contract provides for Government-furnished test equipment, supply and maintenance of test equipment shall be in accordance with the applicable requirements of MIL-I-45607.

4.6.2 Contractor-furnished inspection equipment.

4.6.2.1 Government design. Unless otherwise specified in the contract, all inspection equipment identified by drawing number in specifications or QAPs forming a part of the contract shall be supplied by the contractor in accordance with the design specified. The contractor may, however, propose alternatives to Government designs for approval in accordance with 6.3.

4.6.2.2 Contractor design. The contractor shall design and supply inspection equipment compatible with the "Methods of Inspection" specified in 4.7 of this specification and with the component inspection procedures specified in "Examination" and "Test Facilities" requirements of MIL-F-13926 whenever Government designs are not specified (see 4.6.2.1). Since tolerance of test equipment is normally considered to be within 10 percent of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials, dimensions, and tolerances used in the design of test equipment shall be so selected and controlled as to ensure that the test

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:33Z
Check the source to verify that this is the current version before use.

equipment will reliably indicate acceptability of a product which does not *exceed* 90 percent of the prescribed tolerance limit and permit positive rejection when nonconforming. Construction shall be such as to facilitate routine calibration of test equipment. Contractor inspection equipment designs shall be submitted for approval In accordance with 6.3.

4.6.2.3 Test equipment. In conjunction with 4.6.2.1 and 4.6.2.2, the test equipment listed in Table 111 (Test equipment list) shall be used in the performance of the applicable test methods and procedures as specified in 4.7.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:33Z
Check the source to verify that this is the current version before use.

TABLE III . Test equipment list.

ITEM NUMBER		DESCRIPTION
1.	Audio oscillator	Frequency: 600 Hz to 20 KHz. Amplitude: 10 to 400 mV variable. Output impedance: 50 ohms . Max hum & noise: 60 DB below rated output .
2.	Analog AC voltmeter	Voltage range: To 400 mV. Frequency range: 600 Hz to 20 KHz min Accuracy: ± 1% . Input impedance: 10 megohms.
3.	Variable attenuator	Attenuation: 10 DB to 80 DB in 5 DB steps. Accuracy: ± 0.5 DB of setting. Impedance: 50 ohms.
4.	Power supply	Output voltage: +25.0 ± 0.1 Vdc. Load regulation: 0.01% max. Line regulation: 0.01% max. Ripple & noise: 200 uV max. Output current: 50 mA min.
5.	Oscilloscope	Bandwidth: 1 MHz min. Deflection factor: AC 10 mV/div to 1 V/div. Input impedance: 1 megohm shunted by approximately 40 pF.
6.	Digital AC voltmeter	Frequency range: 100 Hz to 20 KHz min Voltage range: To 1 volt. Accuracy: ± 0.35% total. Resolution: 10 uV. Input impedance: 1 megohm.
7.	Brass test plate	2 feet by 3 feet, approximately.
8.	Termination	150 ohm, 1/2 w.
9.	Termination	50 ohm, 1/2 w.
10.	Connector (2)	DEM-5W1S, Cinch Manufacturing Company, Chicago, IL, or equivalent.

Source: https://assist.dla.mil -- Downloaded: 2026l0-22T19:33Z
Check the source to verify that this is the current version before use.

4.7 Methods of inspection.

4.7.1 Environmental. Environmental tests shall be conducted in accordance with the test conditions, general test performance guidance, and individual test methods of MIL-STD-810 , except as specified herein. Test facilities, chambers and apparatus used in conducting the tests contained in this specification shall be capable of meeting the conditions required.

4.7.1.1 Vibration. The test shall be performed as specified in Method 514, Category 8, Procedure I. of MIL-STD 810 as modified by 3.3.1 herein. In Step 1 of Procedure I only steps 4 through 8 of paragraph II-2.1 apply. The doppler amplifier shall be attached to the vibration generator directly or with a fixture, and securely held by its normal means of attachment. After vibration, the doppler amplifier shall be tested as specified in 4.7.2 and 4.7.3 herein to determine compliance with 3.3.1.

4.7.1.2 Shock. This test shall be performed as specified in Procedure I, Section II of Method 516 of MIL-STD-810 except that:

a. The post test functional check (Step 5 of Procedure I) need not be conducted until completion of all shock impulses.

b. The shock pulses shall be 15 g's ± 10% amplitude and 11 ms ± 10% duration.

c. The maximum g shall occur at 5.5 milliseconds ± 10%.

d. The *shock* measuring system shall have a flat frequency response within ± 10% from 20 to 2,000 hertz.

After the application of all the shock impulses, the doppler amplifier shall be tested as specified in 4.7.2 and 4.7.3 to determine compliance with 3.3.2.

4.7.1.3 Altitude (operating and non-operating) This test shall be performed as specified in Procedures II and III, Method 500 of MIL-STD-810. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.3.

4.7.1.4 Temperature.

4.7.1.4.1 High (operating and non-operating. This test shall be performed as specified in Procedures I and II, Method *501* of MIL-STD-810 with constant temperature extremes as specified in 3.3.4. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.4.

4.7.1.4.2 LOW (operating and non-operating) . This test shall be performed as specified in Procedures I and II, Method 502 of MIL-STD-810 with constant temperature extremes as specified in 3.3.4. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:33Z
Check the source to verify that this is the current version before use.

4.7.1.5 Humidity (non-operating) This test shall be performed in accordance with Procedure III, Method 507 of MIL-STD-810 except that in Step 7, checkout shall be performed at the conclusion of-the test only, with the Item at standard ambient conditions. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.5.

4.7.2 Electrical. Continuity shall be inspected by standard measuring equipment and visual examination for compliance with 3.4.

4.7.3 Performance. The doppler amplifier shall be tested as follows: Set up the equipment as shown in Figure 1. Do not apply power to the doppler amplifier under test. All test equipment is to be connected to its 110 V, 60 Hz source through three-prong grounding plugs. All test equipment, except the oscilloscope, shall be placed on the brass test plate (item 7, Table III). The oscilloscope must have a ground strap connected to the brass test plate.

4.7.3.1 Input voltage. Apply the input voltage as specified in 3.5.1.

4.7.3.2 Output noise. With no input signal applied to terminals El and E2 of either Al or A2, use the oscilloscope (item 5, Table 111) to measure the output noise level as specified in 3.5.2.

4.7.3.3 Amplifier Al.

4.7.3.3.1 Gain. Adjust the attenuator (item 3, Table III) for 80 decibels (DB) and connect the high side output to El and the low side to E2 of Al. Set the audio oscillator (item 1, Table III) to 1 KHz and set its output level for a reading of 300.0 ± 0.1 mV rms measured at output AIJ1-A1, using the digital AC voltmeter (item 6, Table III). Using the same AC voltmeter, measure the signal level at the output of the audio oscillator (item 1, Table III). It shall *not* be less than 283.5 mV rms and not more than 400.0 mV rms. Note this voltage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:33Z
Check the source to verify that this is the current version before use.

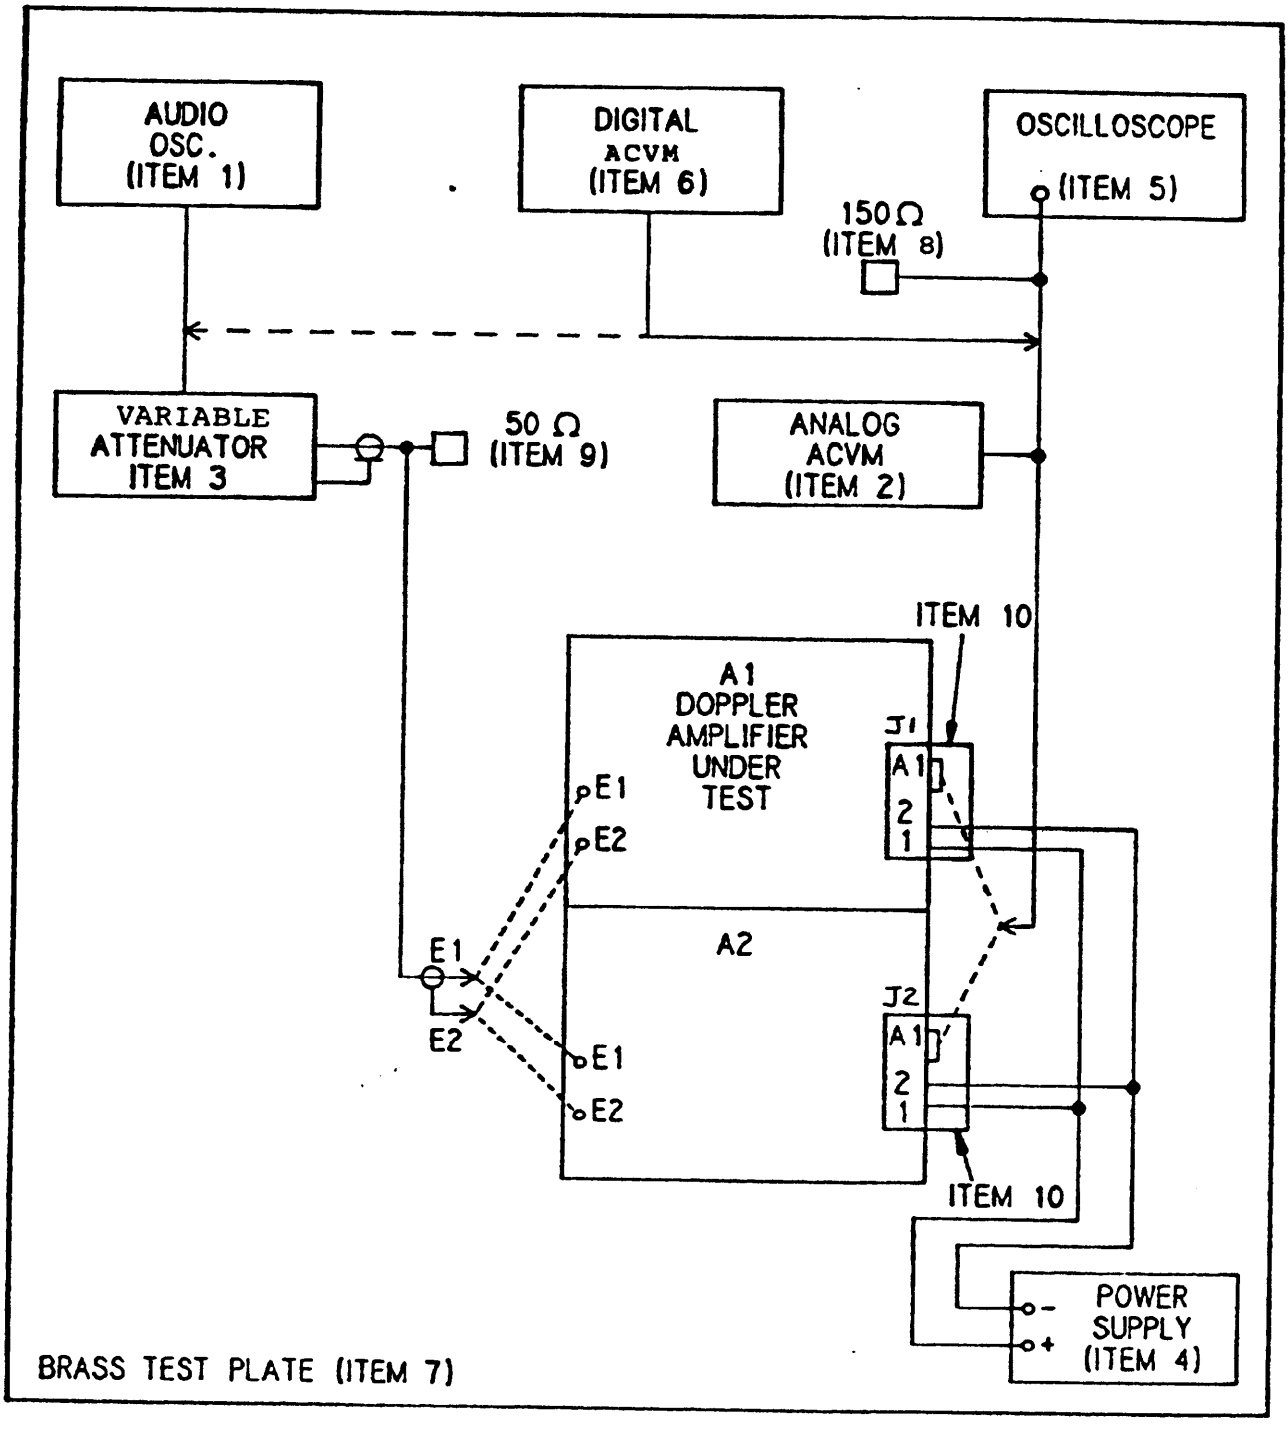


FIGURE 1. Test equipment setup.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:33Z
Check the source to verify that this is the current version before use.

4.7.3.3.2 Frequency response. Monitor the output level at AIJ1-A1 with the analog AC voltmeter (item 2, Table 111). While holding the output level at the audio oscillator (item 1, Table III) constant at that voltage noted in 4.7.3.3.1, slowly vary its frequency between 900 Hz and 10 KHZ while noting the highest and lowest output level of the UUT. The difference between the highest and lowest output level shall be 1.0 DB maximum. Increase the frequency to 20 KHz while holding the audio output level at the audio oscillator constant, and note the output level at AIJ1-A1. It shall be at least 2.0 DB below the highest level in the 900 Hz to 9 KHz range.

4.7.3.3.3 Limiting action. With the input signal applied as in 4.7.3.3.1, use the oscilloscope (item 5, Table III) to observe the top of one cycle of the output signal and decrease the variable attenuator setting (item 3, Table III) until the top of the sine wave just starts to flatten out. The output signal at the point of limiting shall be 1.5 ± 0.5 volts peak-to-peak (P-P). Remove 20 DB, then an additional 20 DB from the attenuator (item 3, Table III) and observe that the output signal level does not increase above 2.o v P-P in either case.

4.7.3.4 Amplifier A2. Repeat 4.7.3.3.1 thru 4.7.3.3.3, except use A2El and A2EZ(RET) for the input and A2J1-A1 for the output.

4.8 Soldering. Soldering processes shall be inspected by certified inspectors to the requirements and acceptance criteria of MIL-STD-2000 as specified in paragraph 3.7.

5. PACKAGING

5.1 General. Preservation, packing and marking shall be in accordance with Special Packaging Instruction PS11740261.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The doppler amplifier assembly is used in the Detector, Doppler 10548509, which is used in Radar Receiver R-1475, part of Radar Set AN/VPS-2. It is a broadband amplifier which provides amplification of low-level doppler signals and supplies them to a phase detector.

Source: https://assist.dla.mil -- Downloaded: 20260-22T19:33Z
Check the source to verify that this is the current version before use.

6.2 Acquisition requirements. Procurement documents shall specify the following:

6.2.1 Procurement requirements.

a. Title, number and date of this specification.
b. Applicable stock number.
c* First article sample requirements.
d. Packaging requirements, If other than specified in Section 5.
e. Serialization requirements, if applicable.

6.3 Submission of contractor inspection equipment designs for approval. Submit two copies of designs as required to: Commander, U.S. Army AMCCOM, Attn: AMSMC-QAF-I, Picatiny Arsenal, NJ 07806-5000. This address will be specified on the Contract Data Requirements List, DD Form 1423 in the contract. Unless otherwise specified, data item DI-R-1714 will apply.

6.4 Drawings. Drawings listed in Section 2 of this specification under the heading U.S. Army Armament Research, Development and Engineering Center (ARDEC), may also include drawings prepared by, and identified as, U.S. Army Armament Research and Development Command (ARRADCOM), Frankford Arsenal, Rock Island Arsenal or Picatinny Arsenal drawings. Technical data originally prepared by these activities is now under cognizance of ARDEC.

6.5 Subject term (key word) listing.

Detector, doppler
Fire control system
Radar Receiver R-1475
Radar Set AN/VPS-2
Vulcan Air Defense System (VADS)

6.6 Changes from previous issue. Asterisks (or vertical lines) are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of-the changes;

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 1285-A761)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:33Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-A-48607B (AR)	18 January 1991

3. DOCUMENT TITLE

AMPLIFIER, DOPPLER ASSEMBLY: 11740261

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER		
[illegible]	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON	7. DATE SUBMITTED (YYMMDD)
	e. APPLICABLE FORM (Yes or No)	

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial	(2) AUTOVON
US Army ARDEC Standardization & Specification Office	(201) 724-6674	880-6674
c. ADDRESS (Include Zip Code) ATTN: SMCAR-BAC-S Picatinny Arsenal, NJ 07806-5000	**IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:** Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:33Z
Check the source to verify that this is the current version before use.