INCH-POUND

MIL-B-49436/10A(ER)
10 December 1993
SUPERSEDING
MIL-B-49436/10(ER)
3 August 1983

MILITARY SPECIFICATION SHEET

BATTERY, RECHARGEABLE, SEALED NICKEL CADMIUM BB-503/TAS

This specification sheet is approved for use by the Army Research Laboratory, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-49436.

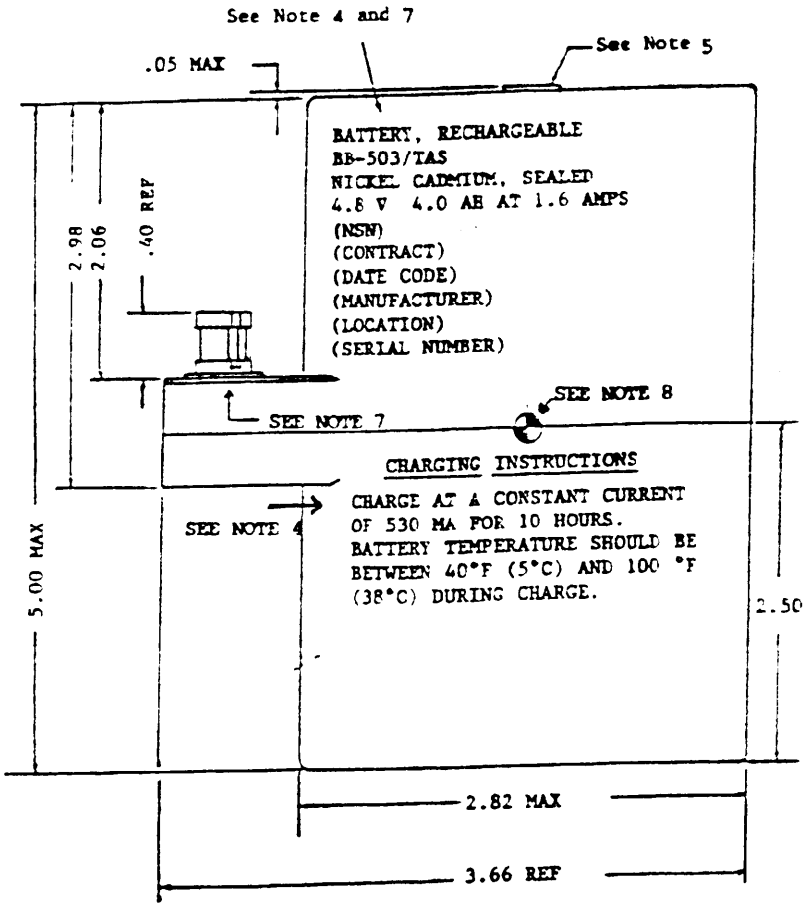


FIGURE 1. FRONT FACE OF BATTERY

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:06Z
Check the source to verify that this is the current version before use.

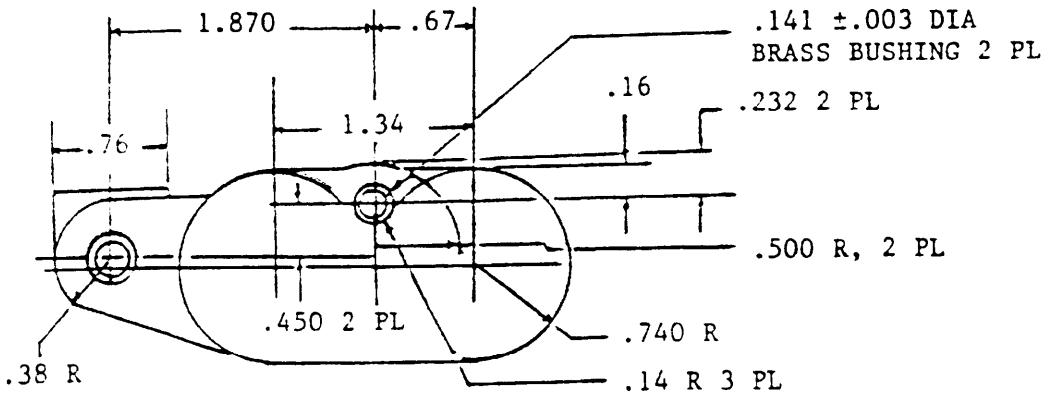


FIGURE 2. TOP FACE

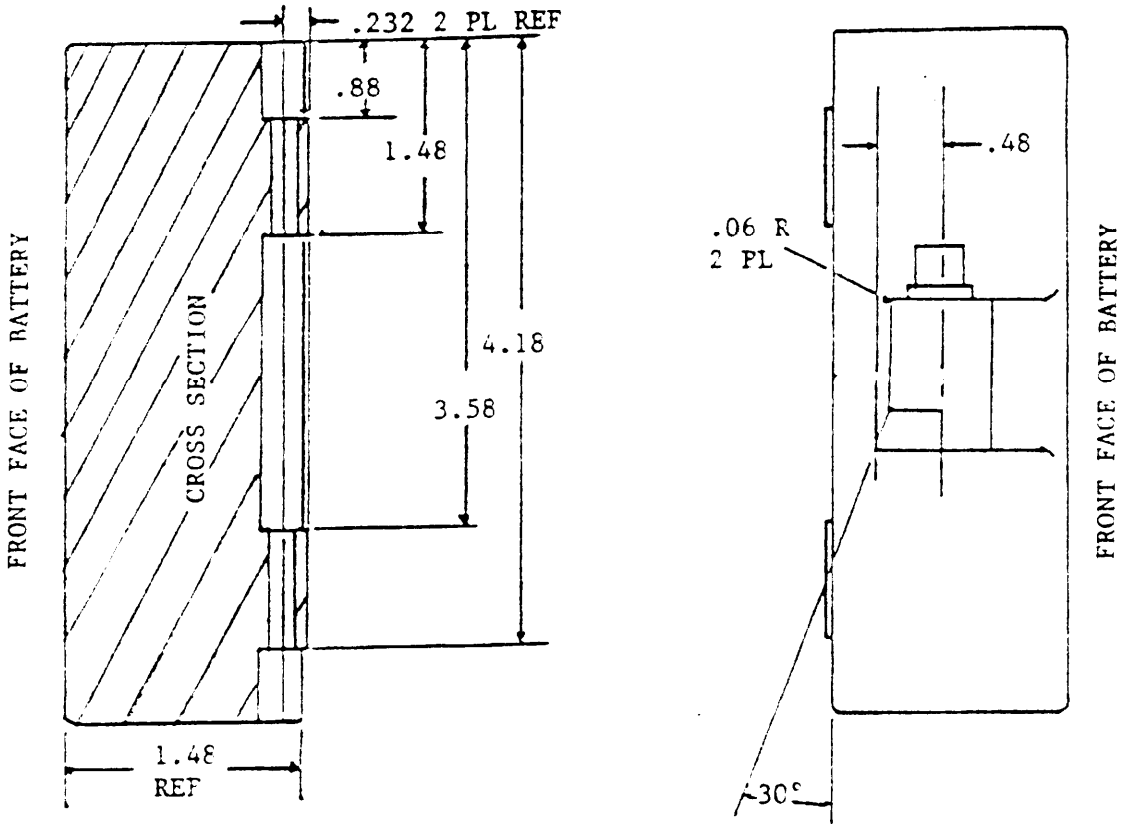


FIGURE 3. SIDE FACE OF BATTERY

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:06Z
Check the source to verify that this is the current version before use.

DRAWING NOTES

1. All dimensions are in inches.

2. Tolerances on decimals: ± 0.02 inch for two places
   ±0.10 inch for three places.

3. Tolerances on angles: ± 1°.

4. Stencil (or equivalent) schematic, identification and charging instructions as shown. Color marking black.

5. Preferred area for pressure relief value. It shall release gas before case damage is incurred. It shall not permit the entry of liquid into the battery case.

6. Push-on coaxial plug connector, part number SM-C-804749. Center pin is positive, connector body is negative.

7. Manufacturer must fill in applicable information in parenthesis.

8. Denotes center of gravity.

REQUIREMENTS:

Rated capacity : 4.0 AH.

Voltage (Nominal): 4.8 volts.

Weight (Maximum): 0.77 Kg (1.7 lbs.).

Connector: Push-on coaxial plug connector per SM-C-804749.

Number and type of cells: 4 sealed "D" size cells or equal in series.

Charge rate for testing and on battery (C/7.5 for 10-14 hrs): 0.53 amp.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:06Z
Check the source to verify that this is the current version before use.

Discharge Rates	5 Second Voltage(V)	Final Voltage(V)	Current (Amps)
C/5	-	4.0	0.80
0.4 C_5	-	4.0	1.60

Test	Discharge Rate	Capacity Requirement (AH)
Full Capacity Discharge	0.4 C_5	4.0
Cycle Life, 112 cycles	0.4 C_5	3.8
Overcharge, 24 hours	0.4 C_5	4.0
High Rate Discharge	Not applicable	-
Low Temperature Discharge at -21°C (-5°F)	0.4 C_5	3.2
Retention of Charge 7 days at 50° C (122°F)	0.4 C_5	2.4
Pulse Discharge	Not applicable	-
Vibration	C/5	4.0

Mounting screws for connector: Not applicable.
Terminal markings: Not applicable.
Writeable charge history label: Not applicable.
Electrical leakage: Not applicable.
Cycle life test: Except that the electrical leakage portion is not applicable.

Revision letters are not used to denote changes due to the extensiveness of the changes.

CONCLUDING MATERIAL

Custodian:
ARMY-ER

Preparing Activity:
ARMY-ER

Review Activities:
ARMY - CR, AV, GL

(Project 6140-A790)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:06Z
Check the source to verify that this is the current version before use.