MILITARY SPECIFICATION SHEET

CIRCUIT BREAKERS, MAGNETIC, LOW-POWER UNSEALED, TRIP-FREE, SERIES TRIP, THREE POLE, AUXILIARY CONTACTS (0.2 to 30 AMPERES)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the circuit breakers described herein shall consist of this specification and the latest issue of MIL-C-55629.


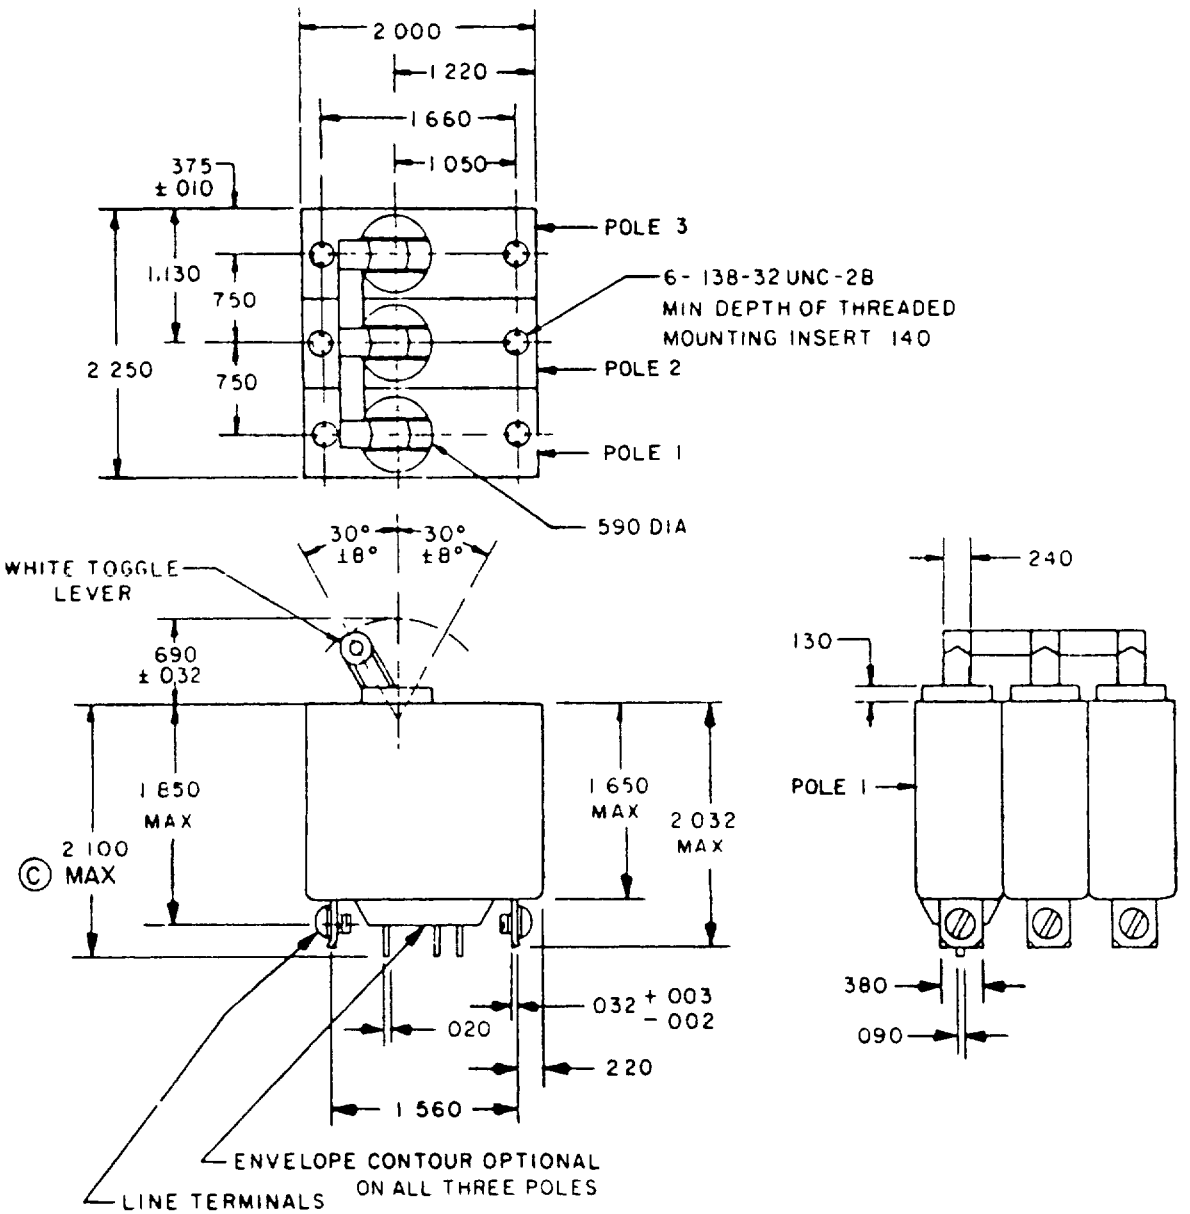


FIGURE 1 Dimensions and configurations


Ⓛ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202640-22T23:45Z
Check the source to verify that this is the current version before use.

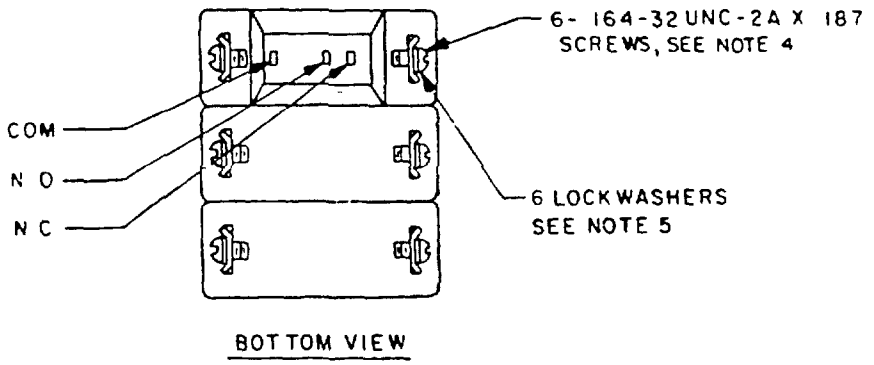

BOTTOM VIEW

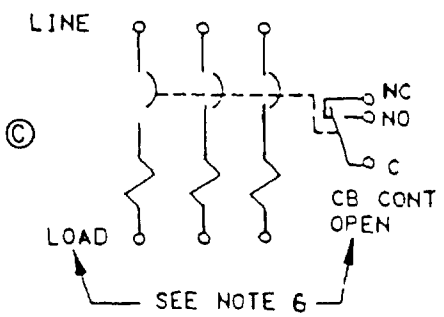

Inches	mm	Inches	mm	Inches	mm	Inches	mm
002	0 05	090	2 29	375	9 52	1 560	39 62
003	0 08	130	3 30	380	9 63	1 650	41 91
005	0 13	140	3 56	590	14 99	1 660	42 16
010	0 25	187	4 75	690	17 53	1 850	46 99
015	0 38	220	5 59	750	19 05	2 000	50 80
020	0 51	235	5 97	1 050	26 67	2 032	51 61
025	0 64	240	6 10	1 130	28 70	2 090	53 09
032	0 81	250	6 35	1 220	30 99	2 100	53 34
						2 250	57 15

NOTES
1. Dimensions are in inches
2. Metric equivalents are given for general information only
3. Unless otherwise specified, tolerance is ± 031 (0 79 mm)
4. Terminal screw, No 8, 164-32UNC-2A, 187 ± 015 long, material - brass, tin plated (MIL-T-10727 type I)
5. Lockwasher - split, No 8 MS35338-137
6. Physical item marking of the words "LOAD" and "CB CONT OPEN" is optional

FIGURE 1 Dimensions and configurations - Continued

Source: https://assist.dla.mil -- Downloaded: 202610-22T23:45Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration See figure 1.

Current ratings See table I.

Voltage ratings See table I. 240 V ac breakers are designed also for use at 120 V ac.

Tripping-time delays See table II.

Terminal and mounting hardware See figure 1.

Terminals See figure 1. Solderability is applicable. Solder terminals are formed by removal of screws.

Auxiliary contact terminals

Contact capacity shall be 3.0 amperes at 50 V dc, inductive, 5.0 amperes at 50 V dc, resistive, and 5.0 amperes at 120 or 240 V ac.

Actuator strength 25 pounds.

Actuator operating force 12 pounds, maximum.

Terminal strength.

Applied load 30 pounds.
Applied force 10 pound-inches.

Interrupting capacities

2,000 amperes at 50 V dc.
2,000 amperes at 120 V ac, 60 Hz.
1,500 amperes at 120 V ac, 400 Hz
1,000 amperes at 240 V ac, 60 and 400 Hz.

Part number M55629/12-(dash number from table I)

Source: https://assist.dla.mil -- Downloaded: 202640-22T23:45Z
Check the source to verify that this is the current version before use.

TABLE I. Circuit breaker dash numbers and applicable characteristics.

Dash No.	Current rating (amperes)	Voltage rating	Tripping-time delay	Resistance or impedance ohms (max)	Dash No	Current rating (amperes)	Voltage rating	Tripping-time delay	Resistance or impedance ohms (max)
001	0.2	50 V dc	A	32	059	7.0	240 V ac, 60 Hz	C	.04
002	0.2	50 V dc	B	32	060	7.0	240 V ac, 60 Hz	D	.04
003	0.2	240 V ac, 60 Hz	C	34	061	7.0	240 V ac, 400 Hz	E	.07
004	0.2	240 V ac, 60 Hz	D	34	062	7.0	240 V ac, 400 Hz	F	.07
005	0.2	240 V ac,400 Hz	E	72	063	7.0	240 V ac, 400 Hz	G	.07
006	0.2	240 V ac,400 Hz	F	72	064	8.0	50 V dc	A	.03
007	0.2	240 V ac,400 Hz	G	72	065	8.0	50 V dc	B	.03
008	0.5	50 V dc	A	6	066	8.0	240 V ac, 60 Hz	C	.03
009	0.5	50 V dc	B	6	067	8.0	240 V ac, 60 Hz	D	03
010	0.5	240 V ac, 60 Hz	C	6	068	8.0	240 V ac,400 Hz	E	.06
011	0.5	240 V ac, 60 Hz	D	6	069	8.0	240 V ac,400 Hz	F	.06
012	0.5	240 V ac,400 Hz	E	12	070	8.0	240 V ac,400 Hz	G	.06
013	0.5	240 V ac,400 Hz	F	12	071	9.0	50 V dc	A	.018
014	0.5	240 V ac,400 Hz	G	12	072	9.0	50 V dc	B	.018
015	1.0	50 V dc	A	2	073	9.0	240 V ac, 60 Hz	C	.02
016	1.0	50 V dc	B	2	074	9.0	240 V ac, 60 Hz	D	.02
017	1.0	240 V ac, 60 Hz	C	2	075	9.0	240 V ac,400 Hz	E	.05
018	1.0	240 V ac, 60 Hz	D	2	076	9.0	240 V ac,400 Hz	F	.05
019	1.0	240 V ac,400 Hz	E	4	077	9.0	240 V ac, 400 Hz	G	.05
020	1.0	240 V ac,400 Hz	F	4	078	10.0	50 V dc	A	.02
021	1.0	240 V ac,400 Hz	G	4	079	10.0	50 V dc	B	.02
022	2.0	50 V dc	A	5	080	10.0	240 V ac, 60 Hz	C	02
023	2.0	50 V dc	B	.5	081	10.0	240 V ac, 60 Hz	D	.02
024	2.0	240 V ac, 60 Hz	C	.5	082	10.0	240 V ac,400 Hz	E	.04
025	2.0	240 V ac, 60 Hz	D	.5	083	10.0	240 V ac,400 Hz	F	.04
026	2.0	240 V ac,400 Hz	E	.8	084	10.0	240 V ac,400 Hz	G	.04
027	2.0	240 V ac,400 Hz	F	.8	085	12.5	50 V dc	A	.013
028	2.0	240 V ac,400 Hz	G	8	086	12.5	50 V dc	B	.013
029	3.0	50 V dc	A	.3	087	12.5	240 V ac, 60 Hz	C	.015
030	3.0	50 V dc	B	.3	088	12.5	240 V ac, 60 Hz	D	015
031	3.0	240 V ac, 60 Hz	C	.3	089	12.5	240 V ac,400 Hz	E	.03
032	3.0	240 V ac, 60 Hz	D	.3	090	12.5	240 V ac,400 Hz	F	.03
033	3.0	240 V ac,400 Hz	E	.5	091	12.5	240 V ac,400 Hz	G	.03
034	3.0	240 V ac,400 Hz	F	.5	092	15.0	50 V dc	A	.01
035	3.0	240 V ac,400 Hz	G	.5	093	15.0	50 V dc	B	01
036	4.0	50 V dc	A	.1	094	15.0	240 V ac, 60 Hz	C	.011
037	4.0	50 V dc	B	.1	095	15.0	240 V ac, 60 Hz	D	.011
038	4.0	240 V ac, 60 Hz	C	.1	096	15.0	240 V ac,400 Hz	E	.02
039	4.0	240 V ac, 60 Hz	D	.1	097	15.0	240 V ac,400 Hz	F	02
040	4.0	240 V ac,400 Hz	E	.3	098	15.0	240 V ac,400 Hz	G	.02
041	4.0	240 V ac,400 Hz	F	.3	099	20.0	50 V dc	A	.007
042	4.0	240 V ac,400 Hz	G	.3	100	20.0	50 V dc	B	.007
043	5.0	50 V dc	A	.08	101	20.0	240 V ac, 60 Hz	C	.007
044	5.0	50 V dc	B	.03	102	20.0	240 V ac, 60 Hz	D	.007
045	5.0	240 V ac, 60 Hz	C	.08	103	20.0	240 V ac,400 Hz	E	.01
046	5.0	240 V ac, 60 Hz	D	08	104	20.0	240 V ac,400 Hz	F	.01
047	5.0	240 V ac,400 Hz	E	.15	105	20.0	240 V ac,400 Hz	G	.01
048	5.0	240 V ac,400 Hz	F	.15	106	25.0	50 V dc	A	.005
049	5.0	240 V ac,400 Hz	G	.15	107	25.0	50 V dc	B	.006
050	5.0	50 V dc	A	.06	108	25.0	240 V ac, 60 Hz	C	.006
051	6.0	50 V dc	B	06	109	25.0	240 V ac, 60 Hz	D	.006
052	6.0	240 V ac, 60 Hz	C	.06	110	25.0	240 V ac,400 Hz	E	.007
053	6.0	240 V ac, 60 Hz	D	06	111	25.0	240 V ac,400 Hz	F	007
054	6.0	240 V ac,400 Hz	E	.08	112	25.0	240 V ac,400 Hz	G	.007
055	6.0	240 V ac,400 Hz	F	.08	113	30.0	50 V dc	A	.005
056	6.0	240 V ac,400 Hz	G	.08	114	30.0	50 V dc	B	005
057	7.0	50 V dc	A	.04	115	30.0	240 V ac, 60 Hz	C	.005
058	7.0	50 V dc	B	04	116	30.0	240 V ac, 60 Hz	D	.005
					117	30.0	240 V ac, 400 Hz	E	.006
					118	30.0	240 V ac, 400 Hz	F	006
					119	30.0	240 V ac, 400 Hz	G	.006

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:45Z
Check the source to verify that this is the current version before use.

TABLE II. Tripping-time delay. 1/

Tripping-time delay at 25° ±2°C (tripping time in seconds)														
Time delay percent rated current	DC				60 Hz				400 Hz					
	A		B		C		D		E		F		G	
	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min
100	no trip one hour		no trip one hour		no trip one hour		no trip one hour		no trip one hour		no trip one hour		no trip one hour	
125	70	7	7	.5	120	10	17	.7	---	---	---	---	---	---
150	---	---	---	---	---	---	---	---	60	5	5.8	.50	400	40
200	8	.6	1.4	.13	20	2.2	1.6	.13	20	2.1	1.9	.15	150	9.5
400	1.5	.15	.25	.031	2.3	.3	.25	.03	3.2	.4	.19	.02	19	1.9
600	.05	Inst	.12	Inst	.75	Inst	.13	Inst	.19	Inst	.08	Inst	1.6	Inst
800	.051	Inst	.051	Inst	.16	Inst	.07	Inst	.06	Inst	.05	Inst	.06	Inst
1,000	.026	Inst	.026	Inst	.04	Inst	.04	Inst	.045	Inst	.036	Inst	.043	Inst

	Tripping-time delay at high and low temperature ±2°C (tripping time in seconds)													
Time delay percent rated current	DC				60 Hz				400 Hz					
	A		B		C		D		E		F		G	
	-40° Max	+85° Min	-40° Max	+85° Min	-40° Max	+85° Min	-40° Max	+85° Min	-40° Max	+85° Min	-40° Max	+85° Min	-40° Max	+85° Min
100	no trip one hour		no trip one hour		no trip one hour		no trip one hour		no trip one hour		no trip one hour		no trip one hour	
125	500	5	100	.1	500	1	100	.1	---	---	---	---	---	---
150	---	---	---	---	---	---	---	---	500	5	100	.1	1500	5
200	100	.1	10	.05	100	.05	10	.05	100	1	10	.05	500	.5
400	20	Inst	3	Inst	20	Inst	3	Inst	20	Inst	3	Inst	100	Inst
600	5	Inst	1	Inst	5	Inst	1	Inst	5	Inst	1	Inst	5	Inst
800	2	Inst	.5	Inst	.5	Inst	.5	Inst	.5	Inst	.5	Inst	.5	Inst

1/ Circuit breakers shall not trip at 100 percent rated current. Delays A, B, C, and D must trip at 125 percent of rated current and delays E, F, and G must trip at 150 percent of rated current. Between 100 percent and 125 or 150 percent, they may trip. Instantaneous is defined as less than 15 milliseconds.

Source: https://assist.dla.mil -- Downloaded: 202640-22T23:45Z
Check the source to verify that this is the current version before use.

TABLE III. Supersession and substitution data

Circuit breakers covered by this specification sheet are substitutable for the manufacturer's part numbers as shown below. This information in no way implies that the manufacturer's part number is substitutable for the military part number.

Superseding military part number	Superseded manufacturers part number	
	FSCM 81541	FSCM 74193
	Type APGH-666 UPGH-666	Type JA3
M55629/12XXX	The complete part number consists of the type (above) plus identification codes for comparable internal connections, auxiliary switch, voltage, frequency, time delay, and current rating. UL recognition and moisture fungus proofing is also superseded by the military circuit breakers.	

Custodians
Army - ER
Navy - EC
Air Force - 85

Review activities
Army - ME
Navy - AS, OS
Air Force - 17, 99
DLA - ES

User activities
Army - AV, MI
Navy - MC, SH
Air Force - 19

Preparing activity
Army - ER

Agent
DLA - ES

(Project 5925-0170-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:45Z
Check the source to verify that this is the current version before use.