MILITARY SPECIFICATION SHEET

SCANNER, MECHANICAL, MX-10717(V)2/U

This specification is approved for use by USACECOM, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification sheet covers the Mechanical Scanner, MX-10717(V)2/U and augments MIL-S-49301 . The MX-10717(V)2/U is used on the AN/TAS-4, AN/TAS-4A, AN/TAS-4B, AN/TAS-4C, AN/TAS-4D, Night Vision Sight, Infrared; the AN/TAS-5, Night Tracker; and the AN/TAS-6, AN/TAS-6A, Night Observation Device, Long Range.

1.2 Purpose. The purpose of this specification sheet is to modify or expand the contents of MIL-S-49301 to describe the MX-10717(V)2/U Mechanical Scanner. All the MIL-S-49301 contents apply except as specifically modified herein. Paragraph numbers directly correlate between MIL-S-49301 and this specification sheet.

2. APPLICABLE DOCUMENTS

2.1 Order of precedence. In the event of a conflict between the text of this specification sheet and the references cited herein, the text of this specification sheet shall take precedence.

SPECIFICATIONS

MILITARY

MIL-S-49301	- Scanner, Mechanical, MX-10717(V)/U, General Specification for

DRAWINGS

USA COMMUNICATIONS-ELECTRONICS COMMAND

54490-5006243-2	- Scanner, Mechanical, MX-10717(V)2/U
80063-SM-D-657598	- Scan-Interlace Assembly, PL-1403A/UA
80063-SM-D-773950	- Scan-Interlace Assembly, PL-1403/UA

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: HQ, USA Communications-Electronics Command, ATTN: AMSEL-ED-TO, Fort Monmouth, NJ 07703, by using the self-addresssed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5855

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:02Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Description. The MX-10717(V)2/U Scanner, herein known as the MX-10717(V)2/U, shall consist of the MIL-S-49301 , MX-10717(V)/U Scanner with a phase-shift lens and counterweight assembled and adjusted for 30 Hz operation. The MX-10717(V)2/U Scanner can be operated with either Scan Interlace Assembly PL-1403/UA (SM-D-773950) or PL-1403A/UA (SM-D-657598). These two assemblies will be referred to as the Scan Interlace Assembly throughout this specification sheet.

3.2 Construction. The MX-10717(V)2/U shall be constructed in accordance with drawing 54490 5006243-2 .

3.2.1 Weight. Weight of the MX-10717(V)2/U shall be 1.55 pounds maximum.

3.5 Components.

a. Scanner, Mechanical, MX-10717(V)/U
b. Phase-shift lens assembly
c. Counterweight

3.6 Performance characteristics. The characteristics specified herein shall apply as defined in 3.1 and 3.6.1 except 4.6.8, 4.7.4, and 4.7.5 apply with the phase shift lens, counterweight and associated hardware removed. Operation shall be at 30 Hz using the Scan-Interlace Assembly.

3.6.1 Scan angle and frequency.

3.6.1.1 Variable scan frequency. Not applicable.

3.6.1.2 Specific scan frequency (30 Hz). Scan frequency of the MX-10717(V)2/U with the Scan-Interlace Assembly shall be adjusted to 30.0, ±1.0 Hz. Scan frequency drift shall not be greater than ±3 Hz from the frequency at ambient setting (see MIL-S-49301, 4.4) when exposed to high and low temperature environmental conditions (see MIL-S-49301).

3.6.1.3 Synchronous scan frequency. Not applicable.

3.6.1.4 Scan angle. The scan angle shall be adjusted to 6.1, ±0.3 degrees.

3.6.2 Interlace. The MX-10717(V)2/U shall operate in the 2:1 interlace mode. The interlace switching time shown in MIL-S-49301, figure 1, shall not be greater than 4.0 milliseconds (ms).

3.6.3 Scan direction. The MX-10717(V)2/U shall show the waveform shapes and phase relationships in figure 1 while operating in either the 2:1 side or the 2:1 rear interlace mode.

3.6.4 Power consumption. Power required to operate the MX-10717(V)2/U shall not exceed 2.2 watts.

3.6.5 Scan efficiency. The MX-10717(V)2/U scan efficiency shall be a minimum of 75 percent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:02Z
Check the source to verify that this is the current version before use.

3.6.6 Scan jitter in azimuth. Jitter time shall be 62.0 microseconds maximum.

3.7 Environmental conditions. See MIL-S-49301 except as follows:

3.7.5 Vibration. The MX-10717(V)2/U shall not be damaged by vibration over a frequency spectrum at the specified g levels and amplitudes shown in figure 2 for the X axis and as shown in figure 3 of MIL-S-49301 for the Y and Z axis. During specified vibration, the average interlace waveform amplitude shown in MIL-S-49301, figure 1 shall not deviate from the amplitude without vibration by more than ±50 percent.

4. QUALITY ASSURANCE PROVISIONS

4.6 Test methods. Tests shall be performed utilizing the Scan-Interlace Assembly with the MX-10717(V)2/U with a scan angle of 6.1, ±0.3 degrees and at the 30.0, ±1.0 Hz scan rate.

4.6.1 Scan frequency.

4.6.1.1 Variable scan frequency. Not applicable.

4.6.1.2 Specific scan frequency (30 Hz). The MX-10717(V)2/U shall be connected to the Scan-Interlace Assembly, and mounted to a suitable fixture. Power shall be applied and the output of the tachometer (Scan-Interlace Assembly) shall be monitored with a calibrated frequency counter. The output of the Scan-Interlace Assembly shall be adjusted to obtain the specific scan frequency. Failure to meet the requirements of 3.6.1.2 shall constitute failure of this test.

4.6.1.3 Synchronous scan frequency. Not applicable.

4.6.1.4 Scan angle. See MIL-S-49301.

4.6.2 Interlace. See MIL-S-49301.

4.6.3 Scan direction. With the MX-10717(V)2/U operating in either the 2:1 side or the 2:1 rear interlace mode, the outputs of the interlace transducer and the scan tachometer (Scan-Interlace Assembly) are observed with an oscilloscope. The output waveforms shall show the applicable shape and phase relationships shown in figure 1. Failure to meet the requirements of 3.6.3 shall constitute failure of this test.

4.6.4 Power consumption. See MIL-S-49301.

4.6.5 Scan efficiency. The MX-10717(V)2/U shall be operated with the Scan-Interlace Assembly and measurements taken as follows: The period of the scan tachometer is measured by an oscilloscope. The active time between two consecutive scans shall be determined by measuring the time between the 10 percent and the 90 percent points of the scan tachometer waveform. Scan efficiency shall be calculated by dividing the sum of the two consecutive scans by the scan tachometer period and multiplying by 100 percent. Failure to meet the requirements of 3.6.5 shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:02Z
Check the source to verify that this is the current version before use.

4.6.6 Scan jitter in azimuth. The MX-10717(V)2/U shall be tested as specified in MIL-S-49301 with additional circuitry used as shown in figure 3 to test the apparatus. Failure to meet the requirements of 3.6.6 shall constitute failure of this test.

4.7 Environmental tests. See MIL-S-49301 and figure 2.

6. NOTES

6.1 Intended use. The MX-10717(V)2/U is intended for use with the AN/TAS-4, AN/TAS-4A, AN/TAS-4B, AN/TAS-4C, AN/TAS-4D, AN/TAS-5, AN/TAS-6, AN/TAS-6A, thermal night sights.


6.2 Interchangeability. The MX-10717(V)2/U scanner built and tested in accordance with this specification and applicable drawings may be used in place of the MX-9872(V)2/UA scanner. The MX-9872(V)2/UA may not be used in place of the MX-10717(V)2/U scanner.

6.3 Subject Term (Keyword) Listing.
FLIR
Sensor
Scanner

CUSTODIAN
Army - CR

PREPARING ACTIVITY
Army - CR
Project 5855-A290-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:02Z
Check the source to verify that this is the current version before use.

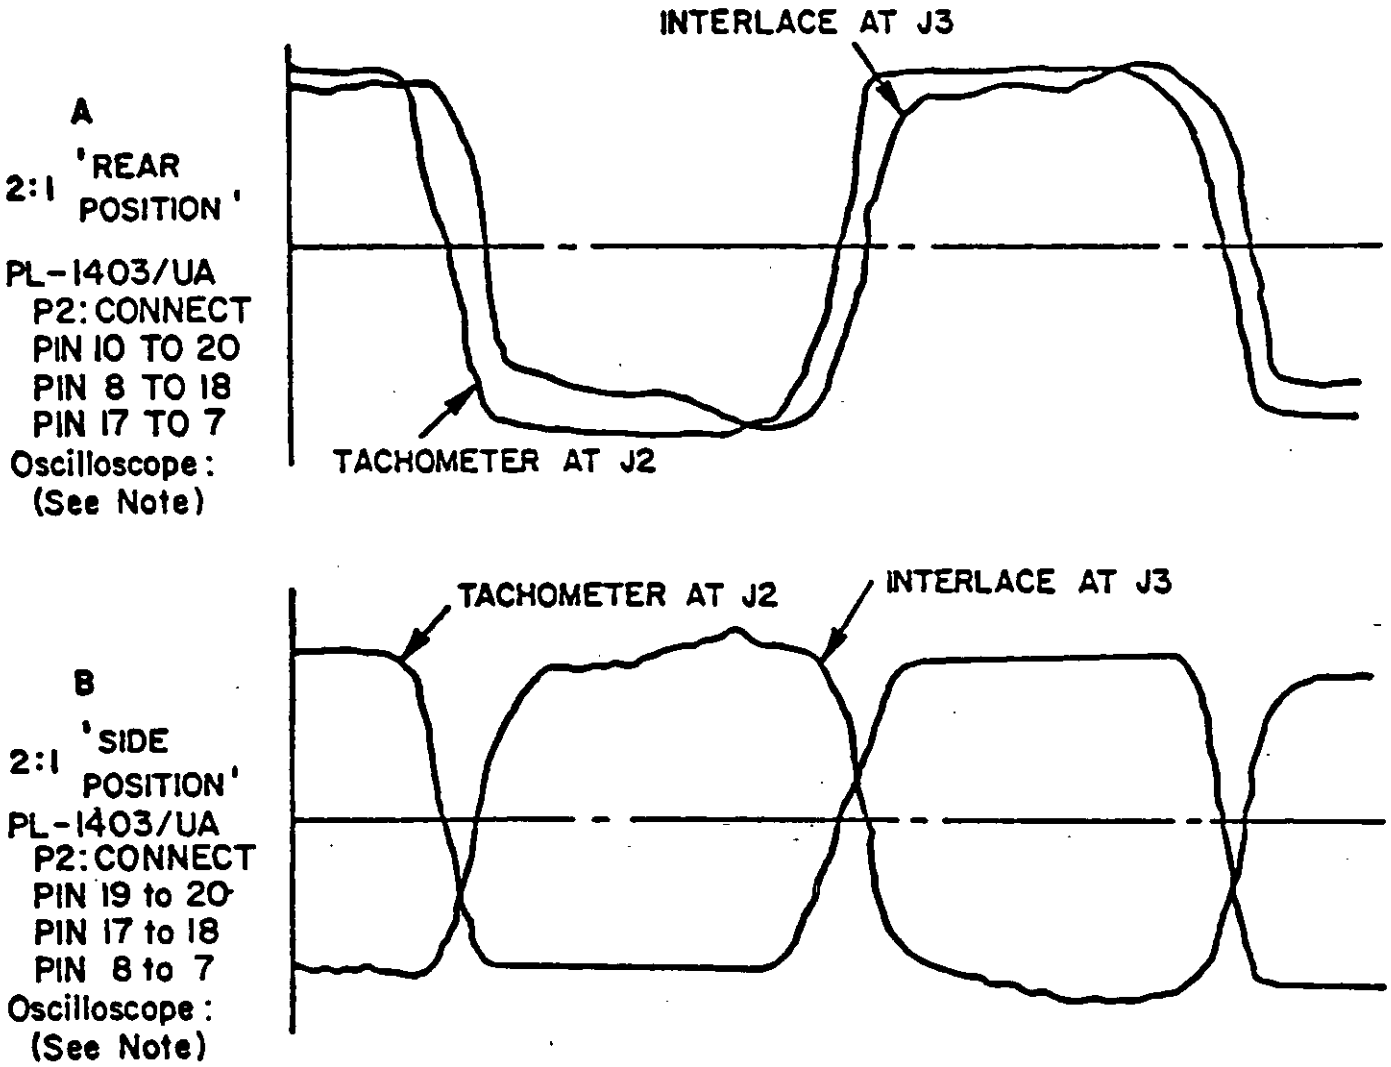

NOTE - CONNECT OSCILLOSCOPE AS FOLLOWS:

CHANNEL 1 - (TACHOMETER) HIGH INPUT TO J2 (OR J1-13) AND LOW SCOPE TO GND.
CHANNEL 2 - (INTERLACE) HIGH INPUT TO J3 (OR J1-1) AND LOW SCOPE TO GND.

FIGURE 1. SHAPE AND PHASE RELATIONSHIP OF INTERLACE TRANSDUCER AND SCAN TACHOMETER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:02Z
Check the source to verify that this is the current version before use.


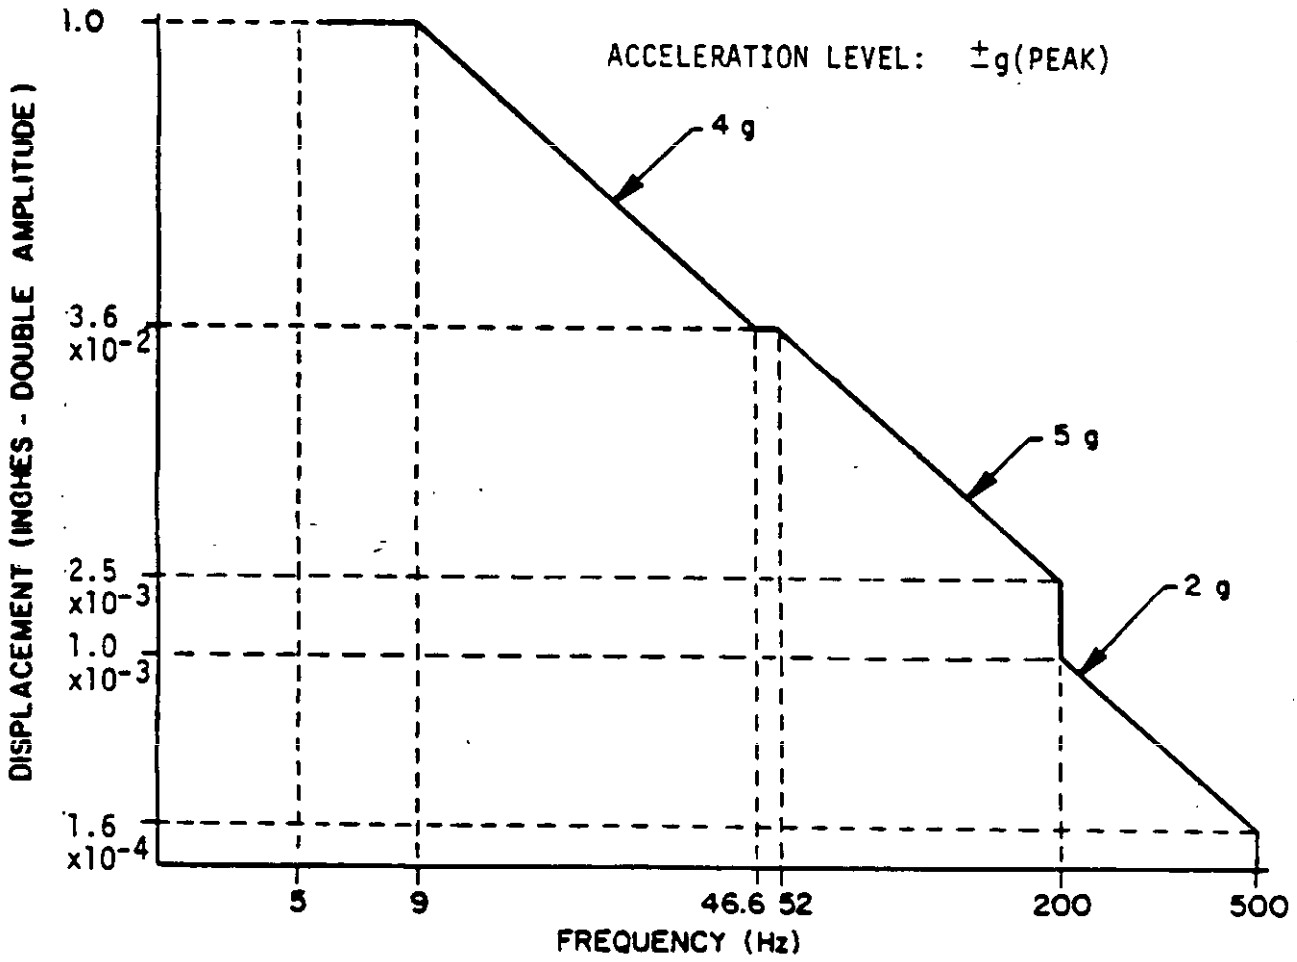


FIGURE 2. VIBRATION TEST PROFILE (X AXIS).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:02Z
Check the source to verify that this is the current version before use.

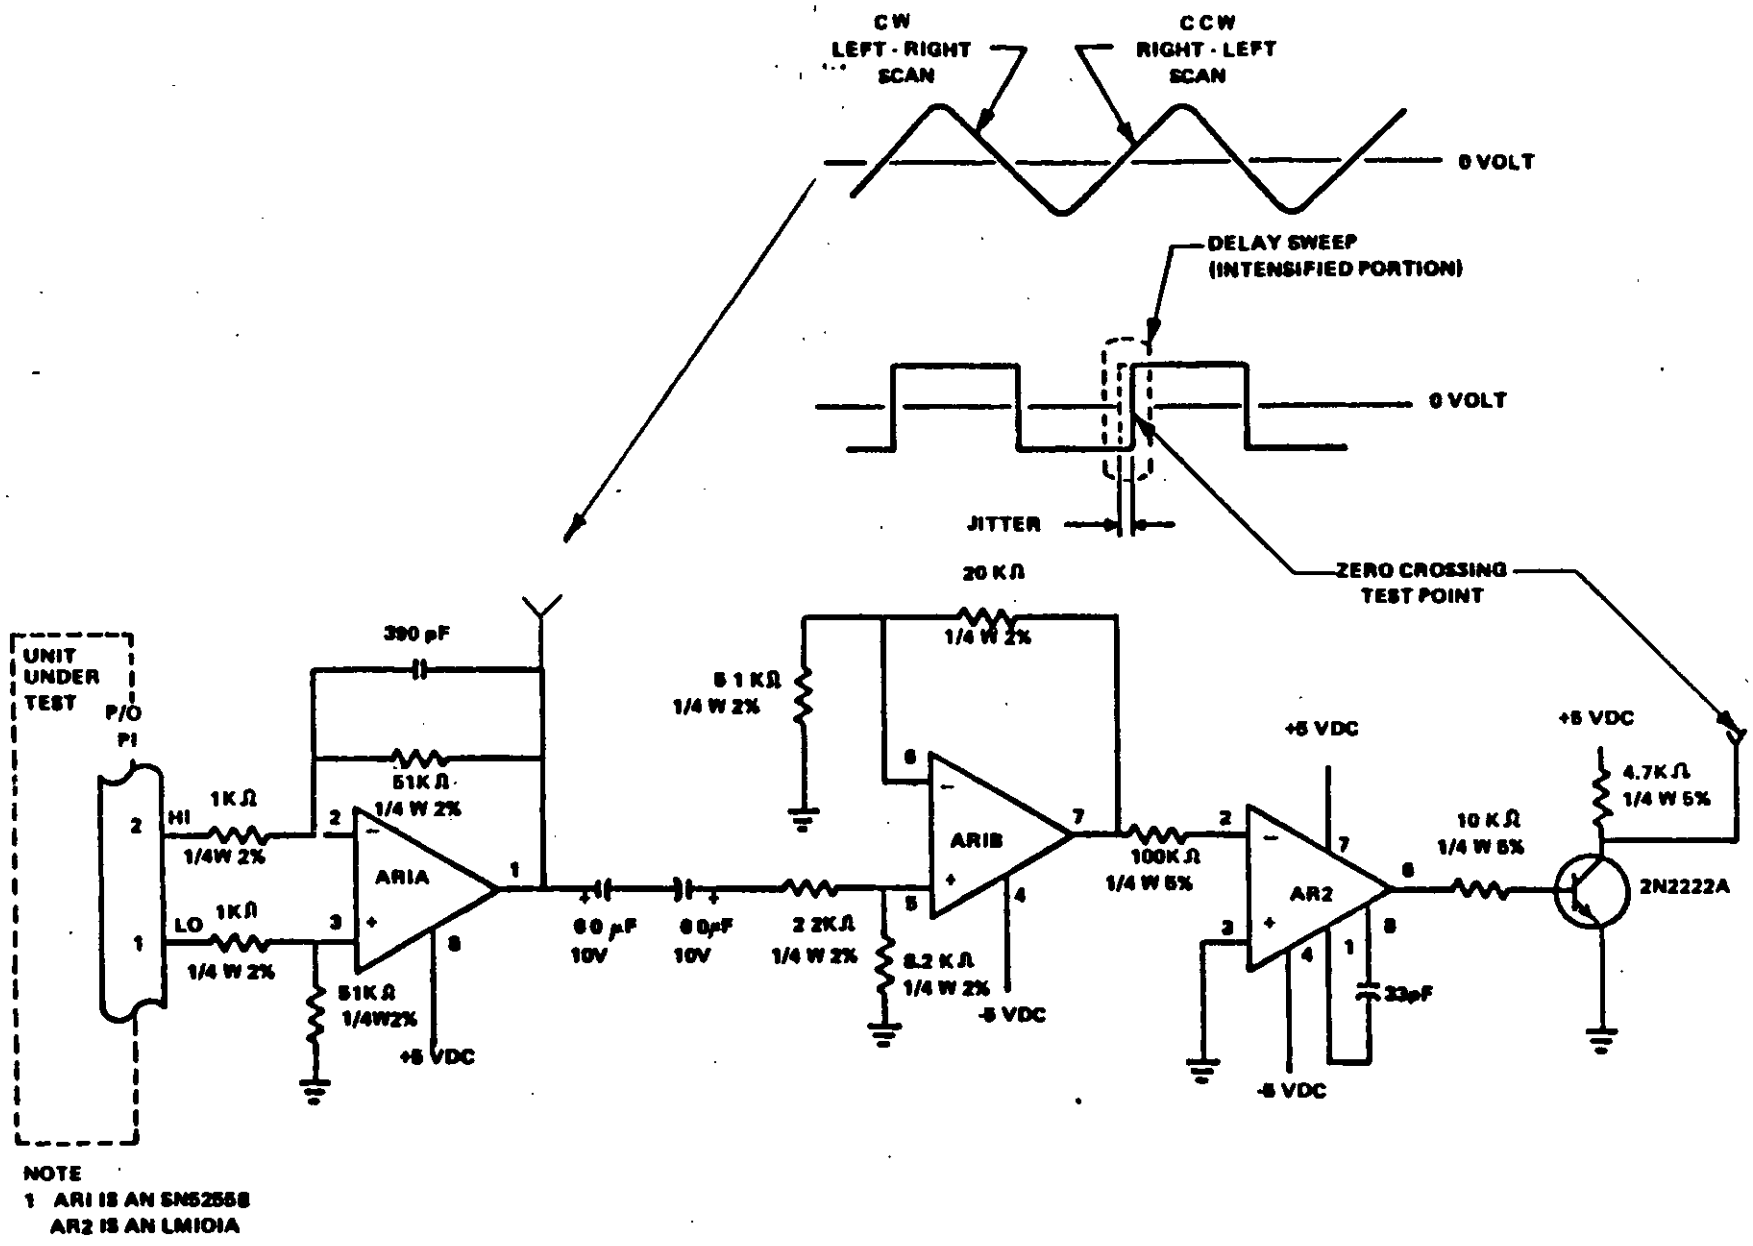

NOTE
1 AR1 IS AN SN5558
AR2 IS AN LM101A

FIGURE 3. TYPICAL CIRCUITRY FOR SCAN JITTER TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:02Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-S-49301/2(CR)	Scanner, Mechanical, MX-10717(V)2/U

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE. HISA-FM 149-85

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:02Z
Check the source to verify that this is the current version before use.