NOT MEASUREMENT SENSITIVE

MIL-DTL-3628/156A
1 June 1998
SUPERSEDING
MIL-DTL-3628/156A
15 November 1996

DETAIL SPECIFICATION SHEET

BADGE, IDENTIFICATION, ARMY STAFF, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3628 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

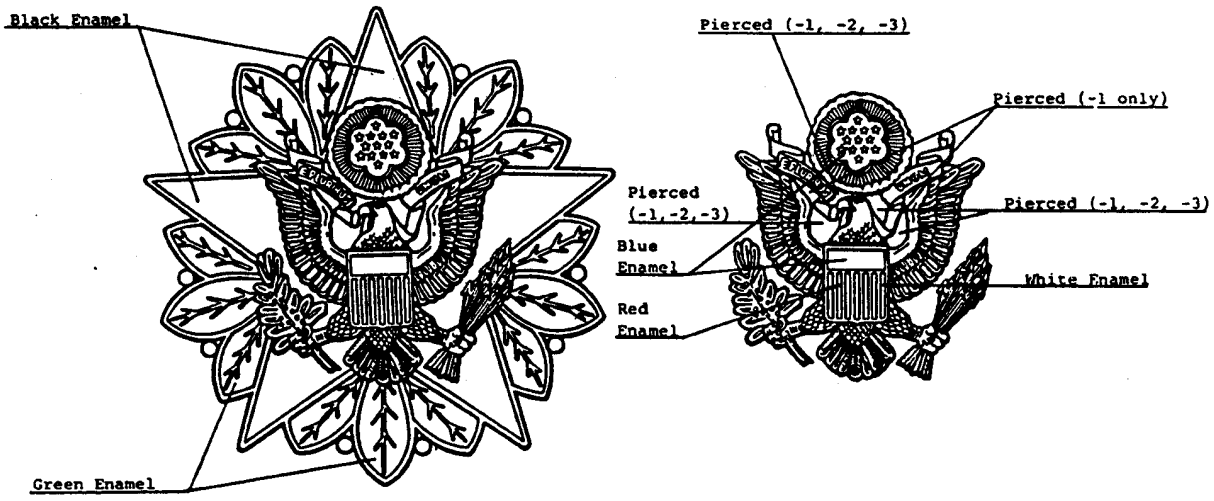

DASH NO.
-1: Chief of Staff
-2: Army Staff, Regular Size
-3: Army Staff, Miniature Size

MATERIAL: Gilding Metal

FINISH:
OBVERSE: Hard Enameled, Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.
REVERSE: Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:52Z
Check the source to verify that this is the current version before use.

DIMENSIONS:

STAR:

CIRCUMSCRIBED DIAMETER:

-1: 3 inches (7.62 cm) (REF)

-2: 2 inches (5.09 cm) (REF)

-3: 1-1/2 inches (3.81 cm) (REF)

THICKNESS: 0.060 inch ± 0.005 inch (0.152 cm ± 0.012 cm)

DEVICE:

HEIGHT (Overall):

-1: 1-5/8 inches (4.13 cm) (REF)

-2: 1-1/16 inches (2.7 cm) (REF)

-3: 13/16 inch (2.06 cm) (REF)

THICKNESS: 0.050 inch ± 0.005 inch (0.127 cm ± 0.012 cm)

ASSEMBLED THICKNESS (Chief of Shield): 0.110 inch ± 0.005 inch (0.279 cm ± 0.012 cm)

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Enameled areas shall be as indicated. The color shall conform to the applicable TIOH color chips listed below or the standard sample:

COLOR	CHIP NO.
Red	1
Green	11
Blue	20
Black	26
White	28

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer.

4. The shield for Dash No. -1 and -2 has 13 stripes. The shield for Dash No. -3 has 7 stripes. The stripes of both shields shall be enameled with alternating white and red; beginning with white and ending with white.

5. Dash No. -1 shall be spherically dapped to a radius of 2-1/2 inches + 1/4 inch - 0 inch (6.35 cm + 0.64 cm - 0 cm) when measured on the reverse. Dash No. -2 shall be spherically dapped to a radius of 2 inches ± 1/8 inch (5.09 cm ± 0.32 cm) when measured on the reverse. Dash No. -3 shall be spherically dapped to a radius of 1-1/2 inch ± 1/16 inch (3.81 cm ± 0.16 cm) when measured on the reverse.

6. The device shall be secured to the background by two solid brass rivets and shall be dapped to insure a snug fit. The device shall be pierced as shown.

7. The attaching device shall be three prongs and clutches. The prongs shall be located 3/16 inch ± 1/32 inch (0.48 cm ± 0.08 cm) in from the edge of the badge. One prong shall be at the top and centered on the vertical center line and the other prongs shall be located on either side of the badge on the first leaf below the horizontal center line.

8. As an alternate method of manufacturing for commercial sale only, 22 karat gold plate with nickel underplating and mirror-like polished may be used which shall match TIOH Metal Finish Chip Number 9.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:52Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0939)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:52Z
Check the source to verify that this is the current version before use.