NOT MEASUREMENT SENSITIVE


MIL-DTL-3628/156D(IH)
30 August 2022
SUPERSEDING
MIL-DTL-3628/156C(IH)
6 November 2017

DETAIL SPECIFICATION SHEET

BADGE, IDENTIFICATION, ARMY STAFF ARMY

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

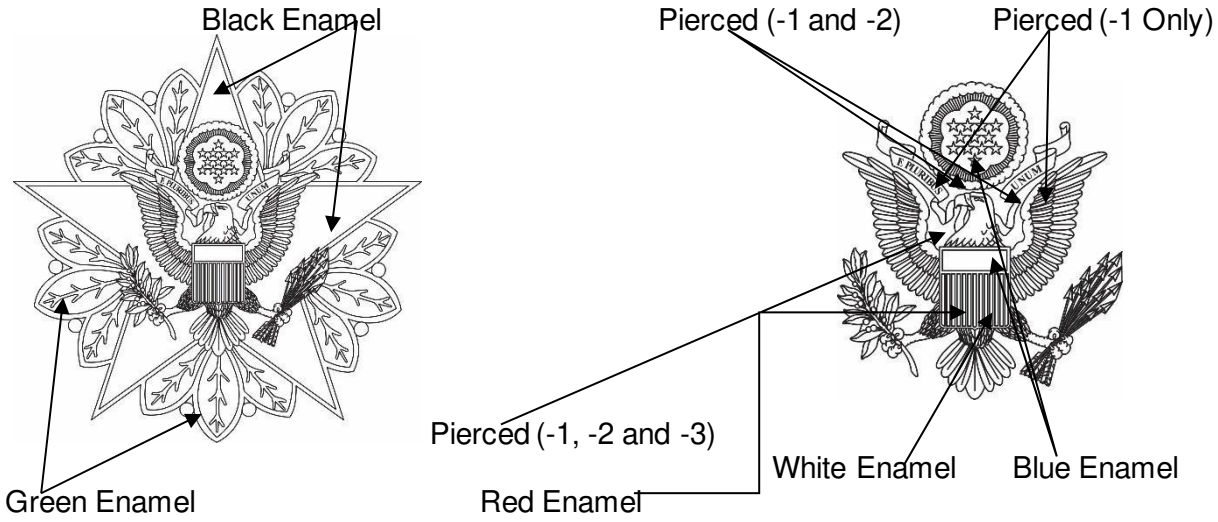

DASH NO.
-1: Chief of Staff
-2: Army Staff Regular Size
-3: Army Staff Miniature Size

MATERIAL: Gilding Metal 95/5 (UNS Alloy NO. C-210)

FINISH:
OBVERSE: Hard Epoxied, 24K, Gold Plated, Mirror-Like Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 6.
REVERSE: 24K Gold Plated, Mirror-Like Polished and shall match TIOH Metal Finish Chip Number 6.

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:52Z
Check the source to verify that this is the current version before use.

DIMENSIONS:

STAR:

CIRCUMSCRIBED DIAMETER:

-1: 3 inches (REF)
-2: 2 inches (REF)
-3: 1-1/2 inches (REF)

THICKNESS: 0.060 inch ± 0.005 inch

DEVICE:

HEIGHT (Overall):

-1: 1-5/8 inches (REF)
-2: 1-1/16 inches (REF)
-3: 13/16 inch (REF)

THICKNESS: 0.050 inch ± 0.005 inch

ASSEMBLED THICKNESS (Chief of shield): 0 .110 inch ± 0.005 inch.

EPOXY: Hard epoxy enamel shall be applied as indicated below, and shall match TIOH Hard Enamel Color Chip Number listed:

TIOH HARD ENAMEL COLOR	CHIP NUMBER
Black	26
White	28
Green	11
Red	1
Blue	20

ATTACHING DEVICE AND SHIELD:

1. The Shield for -1 and -2 has 13 stripes.

2. The shield for -3 has 7 stripes

3. The stripes of both shields shall be enamel with alternating white and red; beginning with white and ending with white.

4. -1 shall be spherically dapped to radius of 2-1/2 inches + 1/4 inch - 0 when measured on the reverse.

5. -2 shall be spherically dapped to radius of 2 inches ± 1/8 inch when measured on the reverse.

6. -3 shall be spherically dapped to radius of 1-1/2 inches ± 1/16 inch when measured on the reverse.

7. The device shall be secured to the background by two solid brass rivets and shall be dapped to insure a snug fit. The device shall be pierced as shown.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:52Z
Check the source to verify that this is the current version before use.

8. The attaching device shall be three prongs and clutches. The prongs shall be located 3/16 inch ± 1/32 inch in from the edge of the badge. One prong shall be at the top and centered on the vertical center line and the other prongs shall be located on either side of the badge on the first leaf below the horizontal center line.

9. As an alternate method of manufacturing for commercial sale only, 22 K Gold Plated, Mirror – like Polished may used which shall match TIOH Metal Finish Chip Number 9.

NOTES:
The term (REF) refers to the measurements taken from the Government furnished hub or die.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2022-253)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:52Z
Check the source to verify that this is the current version before use.