NOT MEASUREMENT SENSITIVE

MIL-DTL-3628/159A
1 June 1998
SUPERSEDING
MIL-DTL-3628/159A
15 November 1996

DETAIL SPECIFICATION SHEET

BADGE, QUALIFICATION, AVIATION, AVIATOR, MASTER, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3628 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

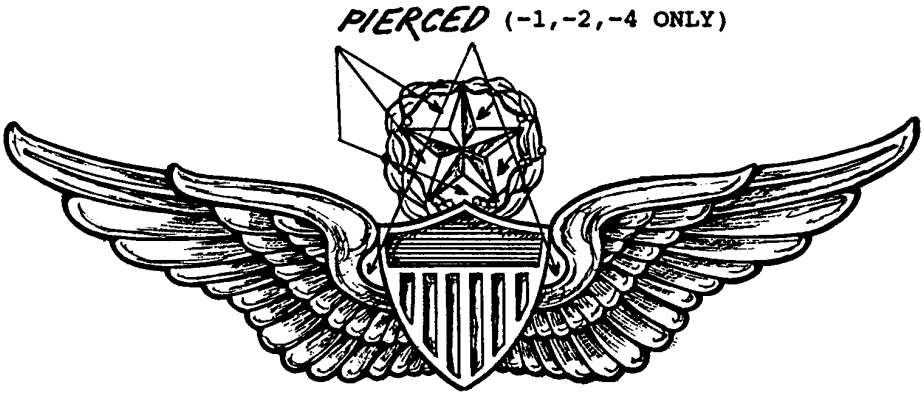

MATERIAL:
-1, -2, -3: Red Brass or Nickel Silver
-4: Red Brass

DASH NO.
-1: Regular Size
-2: Miniature Size
-3: Dress Miniature Size
-4: Regular Size, Subdued

FINISH:
-1, -2, -3: Nickel Plated (Red Brass only), Silver Plated, Oxidized, Relieved, Matte Finish with the Highlights of the Shield Mirror-like Polished.
-4: Dull, Flat Black Enamel Finish.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:53Z
Check the source to verify that this is the current version before use.

DIMENSIONS:

HEIGHT (Overall):
-1, -4: 7/8 inch (2.12 cm) (REF)
-2: 23/32 inch (1.83 cm) (REF)
3: 15/32 inch (1.19 cm) (REF)

WIDTH (Overall):
-1, -4: 2-1/2 inches (6.35 cm) (REF)
-2: 2 inches (5.08 cm) (REF)
-3: 1-1/4 inch (3.18 cm) (REF)

THICKNESS (At Thickest Point of Wings):
-1, -4: 0.110 inch ± 0.005 inch (0.279 cm ± 0.012 cm)
-2, -3: 0.095 inch ± 0.005 inch (0.229 cm ± 0.012 cm)

NOTES:

1. The term (REF) refers to measurements taken from the Government furnished hub or die.

2. Piercing shall be as indicated. The piercing shown is for Dash No. -1, -2, and -4 only. The piercing for Dash No. -2 is identical except the area between the star and the top of the shield is not pierced. There is no piercing for Dash No. -3.

3. Attaching device shall be prong and clutch type. The prongs shall be located on the horizontal center line, equidistant from each end and the following distance apart.

Dash No. -1 and -4: 1-3/4 inches ± 1/32 inch (4.45 cm ± 0.08 cm)
Dash No. -2: 1-1/2 inches ± 1/32 inch (3.81 cm ± 0.08 cm)
Dash No. -3: 7/8 inch ± 1/32 inch (2.22 cm ± 0.08 cm)

4. A mock forcer may be used to bring up the design of the shield for Dash No. -1, -2 and -4 only.

5. The dull flat black enamel for Dash No. -4 shall match FED-STD-595, Chip No. 37038.

6. When specified in acquisition documents, an astronaut device may be embossed to the shield portion of the badge in accordance with MIL-DTL-3628/166 and TIOH drawing B-5-84.

7. Dash No. -1, -2, and -3 may be nickel or rhodium plated with a mirror-like polished finish for commercial sale only. The silver plating requirement shall not apply with this finish.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0939)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:53Z
Check the source to verify that this is the current version before use.