A-A-59324A
23 April 2004
SUPERSEDING
A-A-59324
14 September 1998

COMMERCIAL ITEM DESCRIPTION

MAINTENANCE PLATFORM, SELF-PROPELLED, ELECTRIC

The General Services Administration has authorized the use of this commercial item description (CID) by all federal agencies.

1. SCOPE

1.1 Scope. The maintenance platform is civil engineering equipment for use in the inspection and maintenance of electrical, heating and ventilating utilities and Air Force buildings such as aircraft hangers.


2. CLASSIFICATION

2.1 Classification. The units shall be of the following types, as specified (see 7.2).

2.1.1 Types. The types of maintenance platforms ,self-propelled, electric are as follows:

Type I	25 foot boom
Type II	45 foot boom

2.2 Part or Identifying Number (PIN). The following PIN procedure is for government purposes and does not constitute a requirement for the contractor. The PIN to be used for self-propelled electric maintenance platforms acquired to this CID is created as follows:

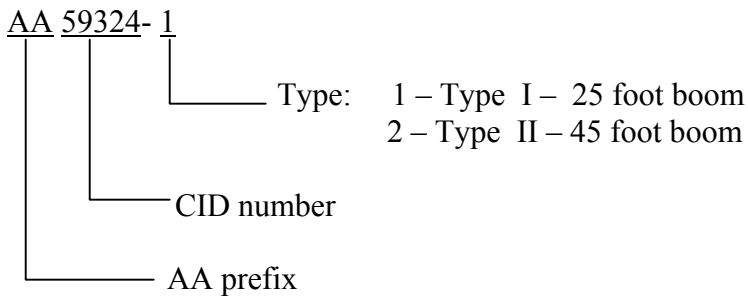

AMSC N/A FSC 4940

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:10Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS.

3.1 Description. The work platform shall be electrically powered by batteries that are capable of being charged through a standard 110V electric outlet. The work platform shall consist of a telescopic boom, with basket type enclosed platform. The platform shall be capable of rotating 360 degrees with a 500-pound (lb) rated work load at maximum boom reach and a chassis. The work platform shall be provided, but not limited to: a swing brake, chassis brakes, alternating power supply, two-wheeled steering, horn, ground work area controls for all platform functions, and forward and reverse speeds.

3.2 Safety. An emergency engine shutdown feature shall be provided for the operator. An electric-driven pump shall be provided to allow emergency use of the hydraulic system. All moving parts and all parts subject to high operational temperatures that are of such a nature or so located so as to become a hazard to the operating personnel shall be insulated, enclosed, or guarded to the extent necessary to eliminate the hazard. All safety and warning devices shall comply with ANSI A92.5 requirements. An alarm shall be installed at the work platform which will be activated automatically when the machine base is more than 5 degrees out of level in any direction. Holding valves shall be provided in the hydraulic system to prevent uncontrolled descent in the event of hose or hydraulic failure.

3.3 Power source. The unit shall be powered electric motor and a DC battery pack of sufficient battery rating to power the unit and all related accessories. The unit shall be provided with a battery recharging unit capable of operating from a 110V AC power outlet.

3.4 Steering. The steering shall be of the two-wheel type and shall be controlled from the work platform.

3.5 Chassis brakes. The work platform shall be provided with automatic spring-applied, hydraulically released brakes on not less than two wheels.

3.6 Ground controls. A control panel shall be located at the base work platform for ground control operation for all powered functions of the work platform. Ground controls shall be provided for lift, telescopic boom swing, rotation of basket work area, engine off and start, platform/ground control selector switch, and platform leveling or tilting control.

3.7 Chassis drive. Type I and II platforms shall be self-propelled up to 3 miles per hour with the platform lowered and 1 mile per with the platform raised. The grade ability of the unit shall be a minimum of 25%.

3.8 Electrical system. The electrical system for the work platform electrification shall be provided. All electrical materials shall bear the Underwriters Laboratories (UL) listing mark and be listed in the UL Electrical Construction Materials Directory. All electrical equipment and receptacles shall be connected to a 120V, 60 Hertz, 2-pole, 3-wire, ground, single phase power. All wiring and equipment shall be provided with over-current circuit breaker protection. All receptacles provided with the work platform shall be weatherproof and shall have ground-fault protection. A receptacle shall be provided in the work platform area.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:10Z
Check the source to verify that this is the current version before use.

3.9 Wheels and tires. The work platform shall be mounted on four wheels of the manufacturer's current standard type and size. The tires shall be pneumatic or polyurethane-filled. The tires shall have individual rated load capacities equal to the maximum tire loading imposed by the operation. When tube type tires are furnished, tubes shall be of heavy-duty type and shall be of proper size for tires.

3.10 Horn. The work platform shall be equipped with a horn operable from the work platform. The horn shall be protected against moisture and adverse weather conditions.

3.11 Platform. The platform shall be controlled and elevated by a telescoping boom. The platform shall be automatically self-leveling and shall be able to rotate not less than 160 degrees. The platform shall contain all operating controls to allow the operator to perform all functions. These shall include work platform drive (forward, reverse movement, and braking), platform lift and lower, boom extension and retraction; 360 degrees continuous turntable swings (either direction), and start and stop engine. The platform area shall be provided with emergency shutdown devices and deadman control that must be depressed before operator control can be activated.

3.12 Boom. Rated work load shall be 500 pounds. Work loads are rated with the work platform positioned on level ground and boom at maximum reach. The boom, when fully extended, shall be capable of reaching a platform height of 25 feet for type I and 40 feet for type II. The boom shall be provided with a swing brake.

3.13 Surface finish. The painting shall consist of at least one coat or primer and one finish coat of acrylic-based or polyurethane enamel. The primer shall be applied to a clean, dry surface as soon as practicable after cleaning and treating. The paint shall be free from runs, sags, orange peel, or other defects.

3.14 Instruction plates. The unit shall be equipped with instruction plates suitable located describing special or important procedures to be followed in operating and servicing the equipment.

4. REGULATORY REQUIREMENT.

4.1 The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. PRODUCT CONFORMANCE PROVISIONS.

5.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and quality assurance practices and be the same product offered for sale in the commercial market. The Government reserves the right to require proof of such conformance.

6. PACKAGING.

6.1 Packaging. Preservation, packing, and marking shall be as specified in the contract or order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:10Z
Check the source to verify that this is the current version before use.

7. NOTES.

7.1 Source of non-Government documents.

7.1.1 ANSI Standards are available from the American National Standards Institute, 11 West 42nd Street, New York, NY 10036.

7.1.2 UL Electrical Construction Materials Directory is available from Underwriters Laboratories, Inc.,333Pfingsten Road, Northbrook, IL 60062-2096

7.2 Ordering data. Acquisition documents must specify the following:

a. Title, Number and date of this document.
b. Power source (see 2.1.2)
c. Lift System (see 2.1.8)

MILITARY INTERESTS:

Custodians:
Air Force - 99

Preparing Activity:
Air Force - 84

Agent:
Air Force - 99

(Project No. 4940-0791)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at www.dodssp.daps.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:10Z
Check the source to verify that this is the current version before use.