INCH-POUND
A-A-59326/10B
April 21, 2011
SUPERSEDING
A-A-59326/10A
May 1, 2003

COMMERCIAL ITEM DESCRIPTION SPECIFICATION SHEET

COUPLING HALF, CAP, DUST, TYPE IX

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

The complete requirements for procuring couplings described herein shall consist of this document and the latest issue in effect of A-A-59326.

1. SCOPE. This specification covers a Coupling Half, Cap, Dust, Type IX to be used in conjunction with a male cam locking type coupling half.

2. CLASSIFICATION. The size of the dust cap is designated in table I.

TABLE I. Coupling half, size.

Dash No.	Cam-Lock Nom. Size	Gasket Reqd
1	½	-1
2	¾	-2
3	1	-3
4	1 ¼	-4
5	1 ½	-5
6	2	-6
7	2 ½	-7
8	3	-8
9	4	-9
10	6	-10

NOTE: Sizes are in inches.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to DAMI_STANDARDIZATION@conus.army.mil or U.S. Army RDECOM, Tank Automotive Research, Development and Engineering Center, ATTN: RDTA-EN/STND/TRANS MS #268, 6501 E. 11 Mile Road, Warren, MI 48397-5000. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.daps.dla.mil.

AMSC N/A FSC 4730

Distribution Statement A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS. The following characteristics may differ from those listed in the latest issue of A-A-59326.

3.1 Accessories. The coupling shall be supplied with pull rings, key ring with chain and gasket as indicated.

3.2 Sash chain. The key ring shall attach a sash chain consisting of 19 links minimum, size 35 in accordance with ASTM A466/A466M, as shown in figure 1.

3.3 Cam-arms. The ½-inch through 6-inch coupling halves shall have two cam-arms unless otherwise requested. 6-inch dust cap requiring 4 cam-arms needs to be specifically stated by the contracting activity when required.

4. NOTES

4.1 Part identification number (PIN). The following PIN procedure is for government purposes and does not constitute for the contractor. The example describes a part numbering system for specification sheet A-A-59326/10.

AA59326/10-3-A; where /10 indicates a Coupling Half, Cap, Dust, Type IX , -3 indicates a nominal cam locking size of 1-inch, -A indicates a Aluminum body.

Material: A - Aluminum Alloy
B - Copper Alloy (Brass or Bronze)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.

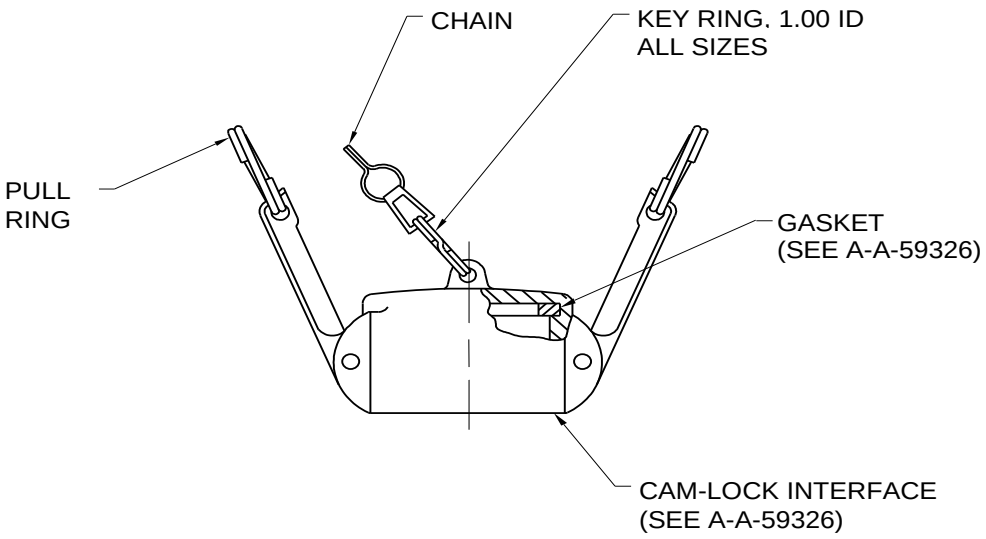

STYLE A

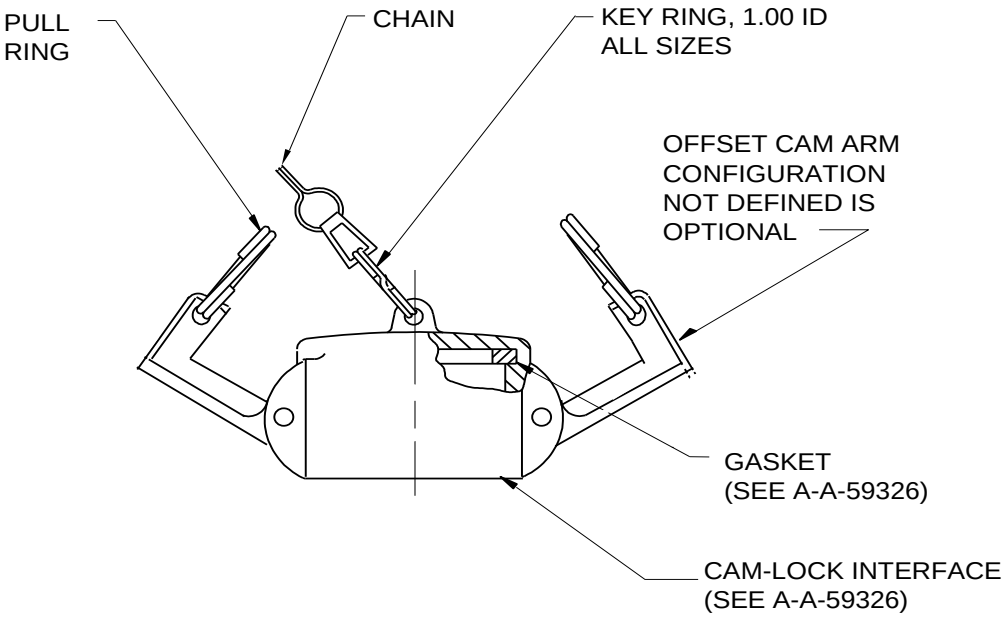

STYLE B

NOTES: 1. The size of the coupling assembly shall conform to table I.
2. Dimensions are in inches.

FIGURE 1. Coupling half.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:
Army - AT
Navy - YD
Air Force - 99

Review Activities:
Army - AV, GL
Navy - MC, SH
Air Force - 71
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:
GSA - FAS

Preparing Activity:
Army - AT

(Project 4730-2011-022)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:11Z
Check the source to verify that this is the current version before use.